

MCE[®] ELECTRIC

LED LIGHTING, ENERGY SAVING SOLUTIONS & WIRING ACCESSORIES
FOR HOME, OFFICE, INDUSTRIAL & COMMERCIAL APPLICATIONS



 MCE Electric SA
 mce_electricsa
 MCE Electric SA

2023-2024

LIGHTING & WIRING ACCESSORIES PRODUCT CATALOGUE



WWW.MCE.CO.ZA



COMPANY PROFILE



MCE ELECTRIC was established in 2001, and is a dynamic and growing distributor offering distribution boards, swimming pool distribution boards, mini circuit breakers, time switches, wiring accessories, security lighting, LED lighting Solutions from proven quality brands.

As our products are procured both locally and internationally, they are fully compliant with recognized local and International safety standards and specifications.

New products are continually being added as new technologies are developed and introduced into the market, as well as trying to meet our customers demands.

Presently MCE ELECTRIC are operating from a well stocked warehouse in Johannesburg and further warehouse's in Pretoria and Durban. We are also very well represented countrywide by our network of appointed wholesalers, distributors and agents.

MCE is the sole appointed distributor for ONESTO in the Sub-Saharan region, as well as having a stake holding in the ONESTO overseas manufacturing plants.

LED BUYERS GUIDE

Changing to LED's (Light Emitting Diode) can be a challenging task with so many different wattages, colours, sizes and types available. Find out what you need to know about choosing the right LED for you with our user friendly buyers guide. LED is the future of lighting. They are more energy efficient and cut down on costs. Changing light fittings or lamps now is an investment and helps to fight against rising electricity costs.



WATT'S AND LUMEN'S

A common misconception is to look at the wattage to determine the light output of a lamp. Wattage is not an indication of brightness but a measurement of how much power the lamp uses. Lumen (lm) is the measurement of light provided by a lamp and is the number you should look for when replacing your existing light bulb with an LED. For example: A traditional 100W lamp produces about 1200lm.



LUMEN'S PER WATT

If you take the Lumen figure and divide this by the wattage figure you can see how much light the lamp is producing per watt. For example a 100W incandescent bulb produces 14lm per watt, but a replacement LED produces 84lm per watt. You are getting more light for less watts.

COLOUR TEMPERATURE

Colour is another important factor when choosing the right light. The measurement is called colour temperature and is measured in Kelvins (K). Warm white (a warmer, yellow light) is 2700K-3000K. Cool white (a cooler, blue light) is 6000K-6500K. Natural white is 4000K-4500K. LED's are also available in Red, Green and Blue.



DIMMABLE

Unlike incandescent lamps, not all LED's are dimmable and not all dimming switches are compatible with LED's. If you would like your LED to be dimmable make sure the lamp is dimmable and that you have the compatible dimmer unit.



BEAM ANGLE

LED's come in a variety of beam angles. The beam angle is the degree of width that the light emits from a lamp. A wide beam angle floods the area with light and is called a floodlight whereas a narrow beam angle is a spotlight.





CONTENTSPage

Indoor & Outdoor Lighting:

Luna Range..... 2-3
Nouveau Range 5-20
Décor Range 21-23
Venus Range..... 24-25
Spartan Range..... 26
LED Flicker Free Kits, Light bulbs & Lamps..... 28-34
Lamp Holders & Light Switches..... 35-39
Pendant Lamp Holders & Covers 41-44
Filaments 46-50

LED Down, Ceiling, Strip & Panel Lights:

LED Down Lights & Cyclops Range 52-54
LED Athena Range..... 55
LED Air Range 57-59
LED Down Lights & Down Light Fittings 61-70
LED Track Lighting & Accessories 72-73
LED Panel Lights & Accessories 74-75
LED Tubes, Fittings & Battens 76-78
LED Ceiling Fans & Extractor Fans..... 79-83
LED Strip, Rope & Neon Flex Lights..... 84-86
LED String & Fairy Lighting 87
LED Emergency Lighting..... 88

LED Flood Lights, High Bays & Sensors:

LED Flood Light Range 90-92
Solar LED Flood Lights 93-96
Solar LED Emergency Light, Solar String & Fairy Lights... 97
Solar LED Multi-Functional Lights 98
Solar LED Bollard Light 99
Solar LED Garden Light..... 100
Solar CCTV Battery Kit..... 101
LED UFO High Bay Lights 103
LED Street Lights..... 105
LED Solar Street Lights & Lighting Poles 106-111
Sensor Lighting & Accessories 113-114
PIR, Microwave & Occupancy Sensors 116-117
Day-Night Switches..... 118
Dimmers, Capacitors & Drivers 119-122

Switches, Sockets & Solar Systems:

Matrix Range..... 124-150
Office Solutions..... 152-155
Oracle Range 157-165
Trinity Range 167-174
Canalplast Power Skirting & Accessories 175
Industrial Sockets & Wall Boxes 176-177

PLEASE NOTE:
 SOME PICTURES MAY DIFFER FROM ACTUAL PRODUCT. PRICES, DISCOUNTS AND SPECIFICATION ARE SUBJECT TO CHANGE
 WITHOUT PRIOR NOTICE AND EXCLUDE VAT. WHILST EVERY EFFORT IS MADE TO ENSURE THE ACCURACY OF THIS CATALOGUE,
 MCE CANNOT BE HELD RESPONSIBLE FOR ANY PRINTING ERRORS. E&OE.


12W LED ROUND BULKHEAD FITTING WITH HALO ACCENT



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 12W LED (80lm per watt), Cool White ($\pm 6000\text{K}$), IP65, **BLACK, GREY & WHITE FITTINGS**



OL-BRA12 / OL-GRA12 / OL-WRA12

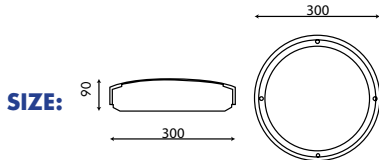


20W LED ROUND BULKHEAD FITTING WITH HALO ACCENT



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 20W LED (80lm per watt), Cool White ($\pm 6000\text{K}$), IP65, **BLACK, GREY & WHITE FITTINGS**



OL-BRA20 / OL-GRA20 / OL-WRA20

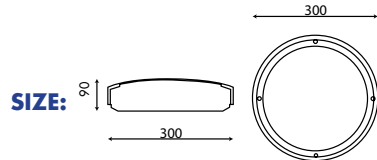


10W LED ELLIPTICAL BULKHEAD FITTING



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 10W LED (80lm per watt), Cool White ($\pm 6000\text{K}$), IP65, **BLACK, GREY & WHITE FITTINGS**



OL-BE10 / OL-GE10 / OL-WE10

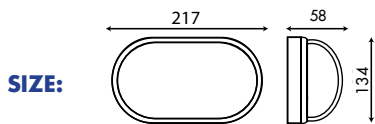


20W LED ELLIPTICAL BULKHEAD FITTING



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 20W LED (80lm per watt), Cool White ($\pm 6000\text{K}$), IP65, **BLACK, GREY & WHITE FITTINGS**



OL-BE20 / OL-GE20 / OL-WE20




20W LED RECTANGULAR
BULKHEAD FITTING



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 20W LED (80lm per watt), Cool White ($\pm 6000\text{K}$), IP65, **BLACK, GREY & WHITE FITTINGS**



OL-BRECA / OL-GRECA / OL-WRECA

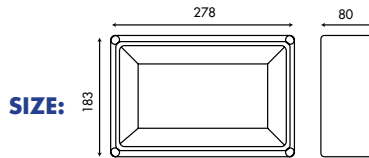



WALL LIGHT FITTINGS


GU10 UP & DOWN WALL FITTING



Die Cast Aluminium, Clear Glass Diffuser, GU10 x2
(Max 35W) **Lamps not included, IP54, BLACK FITTING**



BL91072



SIZE:


GU10 DOWN WALL FITTING



Die Cast Aluminium, Clear Glass Diffuser, GU10 x1
(Max 35W) **Lamps not included, IP54, BLACK FITTING**



BL91073



SIZE:


GU10 ADJUSTABLE WALL FITTING



Round, Die Cast Aluminium, Clear Glass Diffuser,
AC220-240VAC, 1 x GU10 (Max 35W), IP54,
Lamp not included, BLACK FITTING



BL91390



SIZE:


GU10 UP & DOWN WALL FITTING



Round, Die Cast Aluminium, Clear Glass Diffuser,
AC220-240VAC, 2 x GU10 (Max 35W), IP54,
Lamp not included, BLACK FITTING



BL91392



SIZE:

GU10 CEILING FITTING




Round, Die Cast Aluminium, Clear Glass Diffuser, AC220-240VAC, 1 x GU10 (Max 35W), IP65, **Lamp not included, BLACK FITTING**



BL91809

SIZE:



GU10 CEILING FITTING




Round, Die Cast Aluminium, Clear Glass Diffuser, AC220-240VAC, 1 x GU10 (Max 35W), IP65, **Lamp not included, BLACK FITTING**



BL91810

SIZE:



GU10 WALL FITTING



Rectangular, Die Cast Aluminium, Clear Glass Diffuser, AC220-240VAC, 1 x GU10 (Max 35W), IP65, **Lamp not included, BLACK FITTING**



BL91797

SIZE:



10W ROUND LED WALL FITTING




Die Cast Aluminium, UV Stabilized Opal PC Diffuser, AC220-240VAC, 10W LED (80lm per watt), Warm White ($\pm 3000K$), IP54, **BLACK FITTING**



BL91683-LED

SIZE:





10W SQUARE HALO LED WALL FITTING




Die Cast Aluminium, Clear Glass Diffuser, AC220-240VAC, 10W LED (80lm per watt), Warm White ($\pm 3000\text{K}$), IP54, **BLACK FITTING**



BL91601-LED

SIZE:



WALL FITTING




Stainless Steel + Plastic, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 20W), IP54, **Lamp not included, BLACK FITTING**



BL-SS901A

SIZE:



WALL FITTING




Stainless Steel + Plastic, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 20W), IP54, **Lamp not included, BLACK FITTING**



BL-SS901D

SIZE:



WALL FITTING




Stainless Steel + Plastic, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 20W), IP54, **Lamp not included, BLACK FITTING**



BL-SS901E

SIZE:





WALL FITTING




Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 20W), IP54, **Lamps not included, BLACK FITTING**



BL314

SIZE:



WALL FITTING




Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 20W), IP54, **Lamps not included, BLACK FITTING**



BL319

SIZE:



WALL FITTING




Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 15W), IP54, **Lamps not included, BLACK FITTING**



BL325

SIZE:



WALL FITTING




Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 2 x E27 (CFL Max 15W), IP54, **Lamps not included, BLACK FITTING**



BL326


SIZE:




WALL FITTING



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 20W), IP54, **Lamps not included, BLACK FITTING**



BL320



SIZE:




WALL FITTING



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 20W), IP54, **Lamps not included, BLACK & GREY FITTINGS**



BL008C



SIZE:


WALL FITTING



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 20W), IP54, **Lamps not included, BLACK & GREY FITTINGS**



BL398 / GR398



SIZE:


WALL FITTING



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 20W), IP54, **Lamps not included, BLACK FITTING**



BL402



SIZE:


WALL FITTING




Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 20W), IP54, **Lamps not included, BLACK FITTING**



BL451



SIZE:

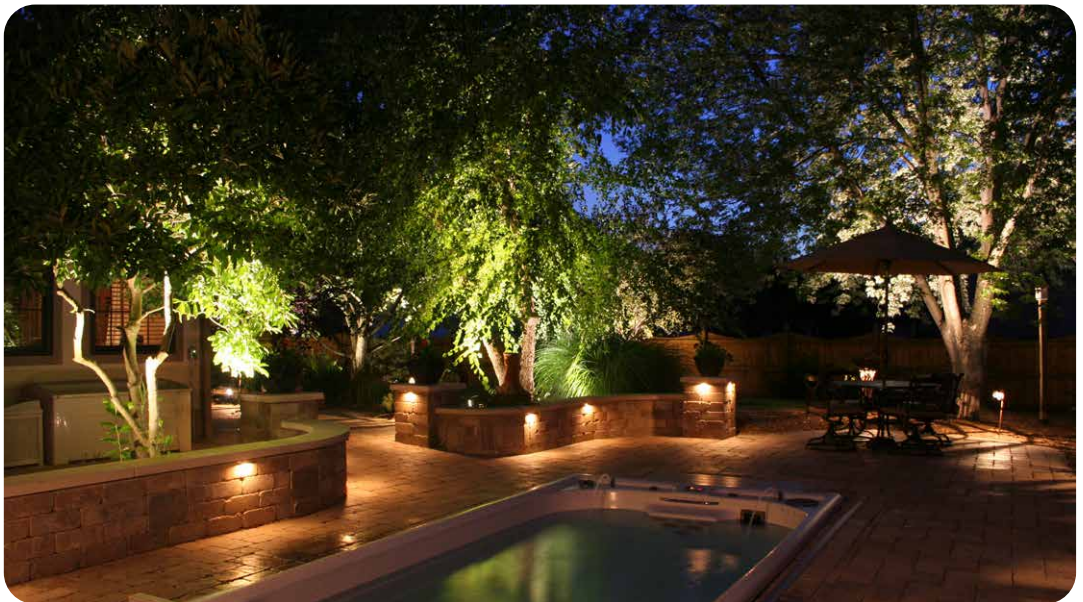

ROUND BULKHEAD FITTING




Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 2 x E27 (CFL Max 20W), IP54, **Lamps not included, BLACK & GREY FITTINGS**



GR155A / BL155A



BL155B / GR155B



LARGE RECTANGULAR BULKHEAD FITTING



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 2 x E27 (CFL Max 20W), IP54, **Lamps not included, BLACK & GREY FITTINGS**



BL017/ GR017




GR018 / BL018



BL018A / GR018A

SIZE:



SIZE:

WALL FITTING



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 15W), IP54, **Lamps not included, BLACK FITTINGS**




BL421S



BL424S



BL425S



SIZE:



ROUND GROUND FITTING




Round, Die Cast Aluminium + Stainless Steel, Clear Glass Diffuser, AC100-240VAC, **1 x GU10** (Max 35W), IP67, **Lamp not included, SILVER FITTING**



BL36103

SIZE:



***Use Flat Lens GU10 Lamp Only**

SQUARE GROUND FITTING




Square, Die Cast Aluminium + Stainless Steel, Clear Glass Diffuser, AC100-240VAC, **1 x GU10** (Max 35W), IP67, **Lamp not included, SILVER FITTING**



BL36503

SIZE:



***Use Flat Lens GU10 Lamp Only**

BLACK SPIKE GARDEN LIGHT




Round With Spike, Die Cast Aluminium, Clear Glass Diffuser, AC220-240VAC, **1 x GU10** (Max 35W), IP65, **Lamp not included, BLACK FITTING**



BL18756

SIZE:



***Use Flat Lens GU10 Lamp Only**



ELLIPTICAL BULKHEAD FITTING




Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 15W), IP54, **Lamps not included, BLACK FITTINGS**



BL101S



BL104S




HALF ROUND RECTANGULAR BULKHEAD FITTING



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 15W), IP54, **Lamps not included, BLACK & GREY FITTINGS**



BL012 / GR012






LANTERN WALL FITTING



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 1 x E27 (Max 20W), IP33, **Lamps not included, BLACK FITTING**



BL011



SIZE:


LANTERN WALL FITTING



Die Cast Aluminium, Clear Glass Diffuser, 1 x E27 (Max 20W), IP33, **Lamps not included, BLACK & WHITE FITTINGS**



BL9012 / WH9012



SIZE:


LANTERN WALL FITTING



Die Cast Aluminium, Clear Glass Diffuser, 1 x E27 (Max 20W), IP33, **Lamps not included, BLACK FITTING**



BL9013



SIZE:

LANTERN FITTING



Die Cast Aluminium, Clear Glass Diffuser, 1 x E27 (Max 20W), IP33, **Lamps not included, BLACK FITTING**



BL4015



SIZE:


LANTERN FITTING



Die Cast Aluminium, Clear Glass Diffuser, 1 x E27
(Max 20W), IP33, **Lamps not included,**
BLACK & WHITE FITTINGS



BLO02S / WH002S



SIZE:


LANTERN FITTING



Die Cast Aluminium, Clear Glass Diffuser, 1 x E27
(Max 20W), IP33, **Lamps not included,**
BLACK FITTING



BLO04S



SIZE:



RECESSED STEP LIGHT




Die Cast Aluminium, Tempered Glass Diffuser, 1 x E27 (CFL Max 15W) IP54, **Lamps not included, COMPLETE WITH PVC WALL BOX**



PVC WALL BOX.

BL3261




ROUND PLASTIC FITTING



PLASTIC, Tempered Glass Diffuser 1 x E27 (CFL Max 15W), IP54, **Lamps not included, BLACK FITTING**



BLP1001L





SQUARE BULKHEAD FITTING



Die Cast Aluminium, UV Stabilized Opal PC Diffuser, 1 x E27 (CFL Max 20W), IP54, **Lamps not included, BLACK & WHITE FITTINGS**



BL3410L / WH3410L

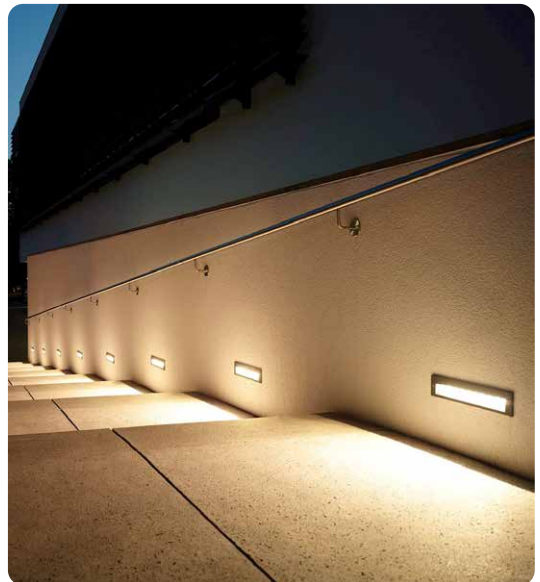




SMALL ELLIPTICAL BULKHEAD FITTING



Die Cast Aluminium, Frosted Glass Diffuser,
1 x E27, IP54, **Lamps not included, BLACK & WHITE FITTINGS**



WH2001L / BL2001L



SUITABLE LAMP: OL-T37-7W-E27


SMALL ELLIPTICAL BULKHEAD FITTING



Die Cast Aluminium, Frosted Glass Diffuser,
1 x E27, IP54, **Lamps not included, BLACK & WHITE FITTINGS**



WH2002S / BL2002S



SUITABLE LAMP: OL-T37-14W-E27

LARGE ROUND BULKHEAD FITTING




Die Cast Aluminium, Frosted Glass Diffuser,
1 x E27, IP54, **Lamps not included, BLACK & WHITE FITTINGS**



BL1001L/WH1001L

BL1002L/WH1002L



SUITABLE LAMP: OL-T37-14W-E27

8W LED FLAT ROUND BULKHEAD FITTING




ABS Body, HIPS Diffuser, 8W LED (80lm per watt), AC200-240VAC, Cool White ($\pm 6500\text{K}$), 120° Beam angle, IP54, **WHITE FITTING**



OL-WR-F8W

SIZE:



12W LED FLAT ROUND BULKHEAD FITTING




ABS Body, HIPS Diffuser, 12W LED (80lm per watt), AC200-240VAC, Cool White ($\pm 6500\text{K}$), 120° Beam angle, IP54, **WHITE FITTING**



OL-WR-F12W

SIZE:



12W LED ROUND BULKHEAD FITTING




ABS Body, HIPS Diffuser, 12W LED (100lm per watt), AC85-265VAC, Cool White ($\pm 6500\text{K}$), 120° Beam angle, IP54, **WHITE FITTING**



OL-WRBU-12W

SIZE:



20W LED ROUND BULKHEAD FITTING




ABS Body, HIPS Diffuser, 20W LED (112lm per watt), AC85-265VAC, Cool White ($\pm 6500\text{K}$), 120° Beam angle, IP54, **WHITE FITTING**



OL-WRBU-20W

SIZE:




12W LED ELLIPTICAL BULKHEAD FITTING



ABS Body, HIPS Diffuser, 12W LED (100lm per watt), AC85-265VAC, Cool White ($\pm 6500\text{K}$), 120° Beam angle, IP54, **WHITE FITTING**



OL-WHO-12W




20W LED ELLIPTICAL BULKHEAD FITTING



ABS Body, HIPS Diffuser, 20W LED (112lm per watt), AC85-265VAC, Cool White ($\pm 6500\text{K}$), 120° Beam angle, IP54, **WHITE FITTING**



OL-WHO-20W






12W LED ROUND BULKHEAD FITTING 

UV Stabilised Flame Retardant Polycarbonate,
Opal PC Diffuser, 12W LED (80lm per watt), Cool
White, ($\pm 6000\text{K}$), IP66, **BLACK, GREY & WHITE**
FITTINGS



OL-BR-LED / OL-GR-LED / OL-WR-LED

SIZE:




12W LED SQUARE BULKHEAD FITTING 

UV Stabilised Flame Retardant Polycarbonate,
Opal PC Diffuser, 12W LED (80lm per watt), Cool
White ($\pm 6000\text{K}$), IP66, **BLACK, GREY & WHITE**
FITTINGS



OL-BS-LED / OL-GS-LED / OL-WS-LED

SIZE:




E27 ROUND BULKHEAD FITTING



UV Stabilised Flame Retardant Polycarbonate, Opal PC Diffuser, **E27 x 1** (CFL Max 20W), IP66, **BLACK, GREY & WHITE FITTINGS**



OL-BR/ OL-GR / OL-WR




E27 SQUARE BULKHEAD FITTING



UV Stabilised Flame Retardant Polycarbonate, Opal PC Diffuser, **E27 x 2** (CFL Max 11W), IP66, **BLACK, GREY & WHITE FITTINGS**



OL-BS/ OL-GS / OL-WS




E27 OVAL BULKHEAD FITTING



UV Stabilised Flame Retardant Polycarbonate, Opal PC Diffuser, **E27 x 1** (CFL Max 20W), IP66, **BLACK, GREY & WHITE FITTINGS**



OL-BHO/ OL-GHO / OL-WHO

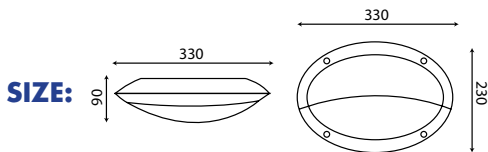

FULL MOON ALABASTER FITTING




Iron Fitting, Frosted Glass Diffuser, **2 x E27**
(Max 60W), IP20, **Lamps not included**



OL-ABA002

SIZE:



FULL MOON ALABASTER FITTING




Iron Fitting, Frosted Glass Diffuser, **3 x E27**
(Max 60W), IP20, **Lamps not included**



OL-ABA003

SIZE:





12W LED FLICKER FREE CONVERSION KIT



12W LED (90lm per Watt), 220VAC, 240° Beam Angle, **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



OL-FFCK-12W

18W LED FLICKER FREE CONVERSION KIT



18W LED (90lm per Watt), 220VAC, 240° Beam Angle, **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



OL-FFCK-18W

24W LED FLICKER FREE CONVERSION KIT



24W LED (90lm per Watt), 220VAC, 240° Beam Angle, **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



OL-FFCK-24W

36W LED FLICKER FREE CONVERSION KIT




36W LED (90lm per Watt), 220VAC, 240° Beam Angle, **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



OL-FFCK-36W

EASY MAGNETIC INSTALLATION



1.



Power off, remove the cover, & remove the lamp, ballast, retaining spring, screws & other parts.

2.



Place the LED conversion kit magnet upward & horizontally in the center of the chassis & align the conversion kits wires with the direction of the hole on the chassis.

3.



Adjust the proper length off the cable entry hole of the chassis, connect the power supply & insulate.

4.



After checking that the lamp is installed correctly, install the cover & then turn on the power supply.

5W LED E27 LIGHT BULB




5W LED (80lm per Watt), AC220-240VAC, 230°
Beam Angle, **COOL WHITE ($\pm 6000\text{K}$) &**
WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE



LED2E27-5W-CW / LED2E27-5W-WW

SIZE:



9W LED E27 LIGHT BULB




9W LED (80lm per Watt), AC220-240VAC, 230°
Beam Angle, **COOL WHITE ($\pm 6000\text{K}$) &**
WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE



LED2E27-9W-CW / LED2E27-9W-WW

SIZE:



5W LED B22 LIGHT BULB




5W LED (80lm per Watt), AC220-240VAC, 230°
Beam Angle, **COOL WHITE ($\pm 6000\text{K}$) &**
WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE



LED3B22-5W-CW / LED3B22-5W-WW

SIZE:



9W LED B22 LIGHT BULB




9W LED (80lm per Watt), AC220-240VAC, 230°
Beam Angle, **COOL WHITE ($\pm 6000\text{K}$) &**
WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE



LED3B22-9W-CW / LED3B22-9W-WW

SIZE:



11W G95 LED E27 LIGHT BULB




11W LED (1000lm), AC185-240VAC, 230° Beam Angle, **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**



LEDG95-11W-CW / LEDG95-11W-WW

SIZE:



18W G120 LED E27 LIGHT BULB




18W LED (1550lm), AC185-240VAC, 230° Beam Angle, **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**



LEDG120-18W-CW / LEDG120-18W-WW

SIZE:



4W LED E14 CANDLE LIGHT BULB




4W LED (240lm), AC185-240VAC, 160° Beam Angle, **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**



LED1E14-4W-CW / LED1E14-4W-WW

SIZE:



6W LED E27 CANDLE LIGHT BULB




6W LED (400lm), AC185-240VAC, 160° Beam Angle, **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**




LED1E27-6W-CW / LED1E27-6W-WW



SIZE:



SIZE:


NEW! **7W T37 LED E27 LIGHT BULB** 


7W LED (630lm), AC185-265VAC, 200° Beam Angle, **COOL WHITE ($\pm 6000\text{K}$) - NON DIMMABLE**



OL-T37-7W-E27

SIZE:




NEW! **9W T37 LED E27 LIGHT BULB** 


9W LED (810lm), AC185-265VAC, 200° Beam Angle, **COOL WHITE ($\pm 6000\text{K}$) - NON DIMMABLE**



OL-T37-9W-E27

SIZE:





NEW! **14W T45 LED E27 LIGHT BULB** 

14W LED (1120lm), AC185-265VAC, 200° Beam Angle, **COOL WHITE ($\pm 6000\text{K}$) - NON DIMMABLE**

OL-T45-14W-E27

SIZE:

NEW!

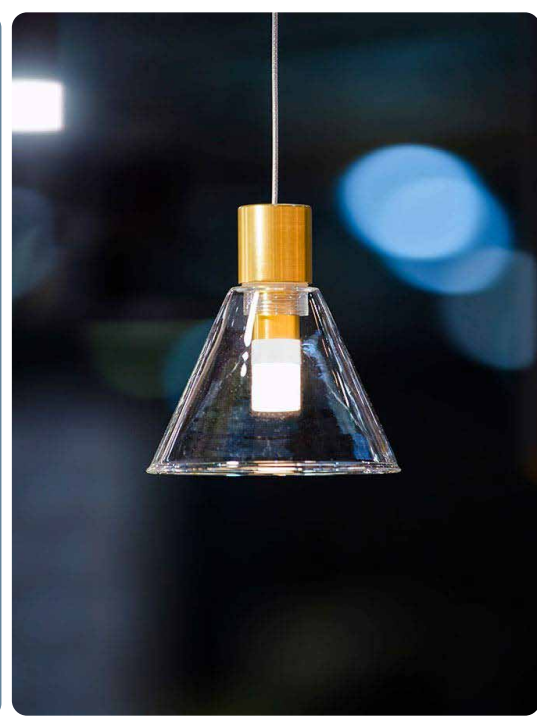30W T100 LED E27 LIGHT BULB




30W LED (3000lm), AC185-265VAC,
270° Beam Angle, **COOL WHITE ($\pm 6000K$)** -
NON DIMMABLE



OL-T100-30W

SIZE:



NEW!

40W T120 LED E27 LIGHT BULB




40W LED (4000lm), AC185-265VAC,
270° Beam Angle, **COOL WHITE ($\pm 6000K$)** -
NON DIMMABLE



OL-T120-40W

SIZE:



NEW!

50W T140 LED E27 LIGHT BULB




50W LED (5000lm), AC185-265VAC,
270° Beam Angle, **COOL WHITE ($\pm 6000K$)** -
NON DIMMABLE



OL-T140-50W

SIZE:



4W LED GU10 SPOTLIGHT




4W LED (80lm per Watt), AC100-240VAC, 120° Beam Angle, **COOL WHITE ($\pm 6000K$)**, **NATURAL WHITE, ($\pm 4000K$) & WARM WHITE ($\pm 2800K$) - NON DIMMABLE**



LEDGU10-4W-CW / LEDGU10-4W-NW / LEDGU10-4W-WW

SIZE:



6W LED GU10 SPOTLIGHT




6W LED (80lm per Watt), AC100-240VAC, 120° Beam Angle, **COOL WHITE ($\pm 6000K$)**, **NATURAL WHITE, ($\pm 4000K$) & WARM WHITE ($\pm 2800K$) - NON DIMMABLE**



LEDGU10-6W-CW / LEDGU10-6W-NW / LEDGU10-6W-WW

SIZE:



3 PACK 4W LED GU10 SPOTLIGHT




3 x 4W LED (80lm per Watt), AC100-240VAC, 120° Beam Angle, **COOL WHITE ($\pm 6000K$) & WARM WHITE ($\pm 2800K$) - NON DIMMABLE**



LEDGU10-4W-CW-3 / LEDGU10-4W-WW-3

SIZE:



6W LED GU10 DIMMABLE SPOTLIGHT




6W LED (80lm per Watt), AC220-240VAC, 120° Beam Angle, **COOL WHITE ($\pm 6000K$) & WARM WHITE ($\pm 2800K$) DIMMABLE**
To be used in conjunction with the Onesto Dimmer Range on Pg. 119



GU10DIM-6W-CW / GU10DIM-6W-WW

SIZE:



NEW!

26W 2 BLADE LOTUS LAMP




26W LED (100lm per Watt), AC185-265VAC,
220° Beam Angle, Multi-Directional,
**COOL WHITE (±6500K) -
NON DIMMABLE**



LL260-26W-CW

SIZE:

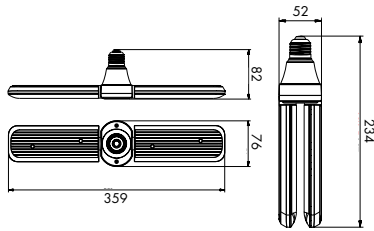

NEW!

39W 3 BLADE LOTUS LAMP




39W LED (100lm per Watt), AC185-265VAC,
220° Beam Angle, Multi-Directional,
**COOL WHITE (±6500K) -
NON DIMMABLE**



LL390-39W-CW

SIZE:

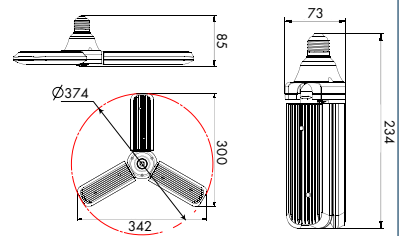

NEW!

52W 4 BLADE LOTUS LAMP




52W LED (100lm per Watt), AC185-265VAC,
220° Beam Angle, Multi-Directional,
**COOL WHITE (±6500K) -
NON DIMMABLE**



LL520-52W-CW

SIZE:

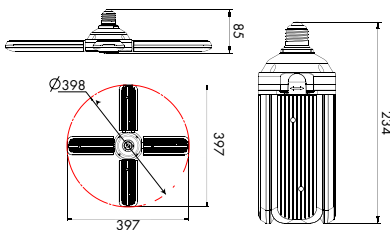

ADJUSTABLE DESIGN

With Ultra-Bright Adjustable LED Heads &
A Unique Wide-Angle Design,
Easily Adjustable Up To 180°

APPLICATIONS

Bedrooms | Living Rooms | Offices | Studies



NEW!


E27 BASE MOUNT LAMP HOLDER

White E27 Base Mount Lamp Holder,
AC100-250VAC, Mild Steel



OL-E27-HB-W

SIZE:



NEW!


E27 BASE MOUNT LAMP HOLDER

Black E27 Base Mount Lamp Holder,
AC100-250VAC, Mild Steel



OL-E27-HB-B

SIZE:



NEW!


E27 BASE MOUNT LAMP HOLDER

Silver E27 Base Mount Lamp Holder,
AC100-250VAC, Mild Steel



OL-E27-HB-S

SIZE:



NEW!


E27 ADJUSTABLE BASE MOUNT LAMP HOLDER

White E27 Adjustable Base Mount Lamp Holder,
AC100-250VAC, Mild Steel
Adjustable to 180°



OL-E27-HB-Z-W

SIZE:



NEW!


E27 ADJUSTABLE BASE MOUNT LAMP HOLDER

Black E27 Adjustable Base Mount Lamp Holder,
AC100-250VAC, Mild Steel
Adjustable to 180°



OL-E27-HB-Z-B

SIZE:



NEW!


E27 ADJUSTABLE BASE MOUNT LAMP HOLDER

Silver E27 Adjustable Base Mount Lamp Holder,
AC100-250VAC, Mild Steel
Adjustable to 180°



OL-E27-HB-Z-S

SIZE:



NEW!


E27 BASE MOUNT LAMP HOLDER

White E27 Base Mount Lamp Holder,
AC100-250VAC, Plastic



OL-E27-90-W

SIZE:



NEW!


E27 BASE MOUNT LAMP HOLDER

Black E27 Base Mount Lamp Holder,
AC100-250VAC, Plastic



OL-E27-90-B

SIZE:



NEW!


E27 BASE MOUNT LAMP HOLDER

White E27 Base Mount Lamp Holder, AC100-250VAC, Plastic



OL-E27-110-W

SIZE:



NEW!


E27 BASE MOUNT LAMP HOLDER

White E27 Base Mount Lamp Holder, AC100-250VAC, Plastic



OL-E27-120-W

SIZE:



NEW!


B22 BASE MOUNT LAMP HOLDER

White B22 Base Mount Lamp Holder, AC100-250VAC, Plastic



OL-B22-PB-W

SIZE:



NEW!


B22 BASE MOUNT LAMP HOLDER

Black B22 Base Mount Lamp Holder, AC100-250VAC, Plastic



OL-B22-PB-B

SIZE:



NEW!


B22 LAMP HOLDER

White B22 Lamp Holder, AC100-250VAC, Plastic



OL-B22-HL-W

SIZE:



NEW!


B22 LAMP HOLDER

Black B22 Lamp Holder, AC100-250VAC, Plastic



OL-B22-HL-B

SIZE:



NEW!


E27 LAMP HOLDER

E27 Ceramic Lamp Holder, AC100-250VAC



OL-E27-CL

SIZE:



NEW!

INLINE LIGHT SWITCH




White Light Switch, AC100-250VAC, Plastic



OL-305-SW-W

SIZE:



NEW!

INLINE LIGHT SWITCH




Black Light Switch, AC100-250VAC, Plastic



OL-305-SW-B

SIZE:



*Pendant
Lamp
Holder*



BLACK PENDANT LAMP HOLDER




900mm Cable (2 x 0.75m²), E27 (100W Max),
250VAC, **BLACK ALUMINIUM**



OL-PEND-BK

SIZE:



GUN METAL PENDANT LAMP HOLDER




900mm Cable (2 x 0.75m²), E27 (100W Max),
250VAC, **GUN METAL ALUMINIUM**



OL-PEND-DN

SIZE:



GOLD COPPER PENDANT LAMP HOLDER




900mm Cable (2 x 0.75m²), E27 (100W Max),
250VAC, **GOLD COPPER ALUMINIUM**



OL-PEND-GC

SIZE:



ROSE GOLD PENDANT LAMP HOLDER




900mm Cable (2 x 0.75m²), E27 (100W Max),
250VAC, **ROSE GOLD ALUMINIUM**



OL-PEND-RG

SIZE:



FLAT BLACK PENDANT LAMP HOLDER




900mm Twisted Cable (2 x 0.75m²), E27 (100W Max), 250VAC, **BLACK ALUMINIUM**



OL-PEND-BK-TF

SIZE:



FLAT GUN METAL PENDANT LAMP HOLDER




900mm Twisted Cable (2 x 0.75m²), E27 (100W Max), 250VAC, **GUN METAL ALUMINIUM**



OL-PEND-DN-TF

SIZE:



FLAT GOLD COPPER PENDANT LAMP HOLDER




900mm Twisted Cable (2 x 0.75m²), E27 (100W Max), 250VAC, **GOLD COPPER ALUMINIUM**



OL-PEND-GC-TF

SIZE:



FLAT ROSE GOLD PENDANT LAMP HOLDER




900mm Twisted Cable (2 x 0.75m²), E27 (100W Max), 250VAC, **ROSE GOLD ALUMINIUM**



OL-PEND-RG-TF

SIZE:



NEW!

ADJUSTABLE PENDANT COVER

Adjustable Into 8 Different Shapes,
ELECTROPLATED BLACK STEEL



OL-PEND-PCS-B SIZE: Ø250mm
OL-PEND-PCM-B SIZE: Ø310mm
OL-PEND-PCL-B SIZE: Ø370mm

NEW!

ADJUSTABLE PENDANT COVER

Adjustable Into 8 Different Shapes.
ELECTROPLATED ROSE GOLD STEEL



OL-PEND-PCS-RG SIZE: Ø250mm
OL-PEND-PCM-RG SIZE: Ø310mm
OL-PEND-PCL-RG SIZE: Ø370mm



ROUND 3 PIECE PENDANT LAMP HOLDER



3 x 900mm Cables (2 x 0.75m²), 3 x E27 (100W Max), 250VAC, **BLACK ALUMINIUM**



OL-PEND-RND-BK

SIZE:

RECTANGULAR 3 PIECE PENDANT LAMP HOLDER



3 x 900mm Cable (2 x 0.75m²), 3 x E27 (100W Max), 250VAC, **BLACK ALUMINIUM**



OL-PEND-RECT-BK

SIZE:





 **-lite**®
creating a green legacy

4W LED E27 FILAMENT BULB




4W LED, A60, Transparent & Grey, AC220-240VAC, Spiral Filament, **WARM WHITE** ($\pm 2800K$) - **DIMMABLE**



OL-A60-4W-D-T / OL-A60-4W-D-GY

SIZE:



8W LED E27 FILAMENT BULB




8W LED, A60, Transparent & Grey, AC220-240VAC, Straight Filament, **WARM WHITE** ($\pm 2800K$) - **DIMMABLE**



OL-A60-8W-D-T / OL-A60-8W-D-GY

SIZE:



8W LED E27 FILAMENT BULB




8W LED, ST64, Transparent, Gold & Grey, AC220-240VAC, Straight Filament, **WARM WHITE** ($\pm 2800K$) - **DIMMABLE**



**OL-ST64-8W-D-T / OL-ST64-8W-D-GD/
OL-ST64-8W-D-GY**

SIZE:



5W LED E27 FILAMENT BULB




5W LED, G80, Transparent, Gold & Grey, AC220-240VAC, Spiral Filament, **WARM WHITE** ($\pm 2800K$) - **DIMMABLE**



**OL-G80-5W-D-T / OL-G80-5W-D-GD/
OL-G80-5W-D-GY**

SIZE:



NEW!

1.2W LED E27 FILAMENT BULB




1.2W LED, A60, Transparent, AC85-265VAC,
Copper Wire Filament, **RED, GREEN, BLUE,**
WARM WHITE (±2800K) - NON DIMMABLE



OL-A60-1.2W-R / OL-A60-1.2W-G
OL-A60-1.2W-B / OL-A60-1.2W-WW

SIZE:



NEW!

1.2W LED E27 FILAMENT BULB




1.2W LED, ST64, Transparent, AC85-265VAC,
Copper Wire Filament, **RED, GREEN, BLUE,**
WARM WHITE (±2800K) - NON DIMMABLE



OL-ST64-1.2W-R / OL-ST64-1.2W-G
OL-ST64-1.2W-B / OL-ST64-1.2W-WW

SIZE:



E27 **5W LED E27 FILAMENT BULB** 


5W LED, G95, Transparent, Gold & Grey
AC220-240VAC, Straight Filament, **WARM WHITE**
(±2800K) - **DIMMABLE**



**OL-G95-5W-D-T / OL-G95-5W-D-GD /
OL-G95-5W-D-GY**

SIZE:




E27 **5W LED E27 FILAMENT BULB** 


5W LED, G125, Transparent, Gold & Grey
AC220-240VAC, Spiral Filament, **WARM WHITE**
(±2800K) - **DIMMABLE**




**OL-G125-5W-D-T / OL-G125-5W-D-GD /
OL-G125-5W-D-GY**

SIZE:




E27 **4W LED E27 FILAMENT BULB** 

4W LED, G200, Gold & Grey, AC220-240VAC,
Spiral Filament, **WARM WHITE** (±2800K) -
DIMMABLE



OL-G200-4W-D-GD / OL-G200-4W-D-GY

SIZE:



E27 **4W LED E27 FILAMENT BULB** 

4W LED, PS40, Gold & Grey, AC220-240VAC,
Spiral Filament, **WARM WHITE** (±2800K) -
DIMMABLE



OL-PS40-4W-D-GD / OL-PS40-4W-D-GY

SIZE:



4W LED E27 FILAMENT BULB




4W LED, C120, Gold & Grey, AC220-240VAC,
Spiral Filament, **WARM WHITE ($\pm 2800\text{K}$)** -
DIMMABLE



OL-C120-4W-D-GD / OL-C120-4W-D-GY

SIZE:



4W LED E27 FILAMENT BULB




4W LED, PS165, Gold & Grey, AC220-240VAC,
Straight Filament, **WARM WHITE ($\pm 2800\text{K}$)** -
DIMMABLE



OL-PS165-4W-D-GD / OL-PS165-4W-D-GY

SIZE:



4W LED E27 FILAMENT BULB





4W LED, TT75, Gold & Grey, AC220-240VAC,
Straight Filament, **WARM WHITE ($\pm 2800\text{K}$)** -
DIMMABLE





OL-TT75-4W-D-GD / OL-TT75-4W-D-GY

SIZE:



NEW! 3W LED E27 ANGEL RING FILAMENT BULB 

3W LED, G125, Gold, AC85-265VAC, Angel Ring Filament, **WARM WHITE ($\pm 1800\text{K}$) - NON DIMMABLE**





G125-AR-3W-A-G / G125-AR-3W-B-G



SIZE:



166
150
125
125


NEW! 4W LED E27 FILAMENT BULB 

4W LED, DT140, Classic Rose, AC220-240VAC, Spiral Filament, **WARM WHITE ($\pm 2800\text{K}$) - DIMMABLE**

OL-DT140-CR

SIZE:



280
165

NEW! 4W LED E27 FILAMENT BULB 

4W LED, DT170, Gradient Black, Olive & Classic Rose, AC220-240VAC, Spiral Filament, **WARM WHITE ($\pm 2800\text{K}$) - DIMMABLE**



OL-DT170-GB / OL-DT170-O / OL-DT170-CR

SIZE:



280
165



NEW! 4W LED E27 FILAMENT BULB 

4W LED, DT200, Gradient Black, Olive & Classic Rose, AC220-240VAC, Spiral Filament, **WARM WHITE ($\pm 2800\text{K}$) - DIMMABLE**



OL-DT200-GB / OL-DT200-O / OL-DT200-CR

SIZE:



280
120






CYCLOPS RANGE

switch2slim

- CYCLOPS LED DOWN LIGHTS & PANEL LIGHTS
- 14mm ULTRA SLIM PROFILE
- LED ENERGY SAVING TECHNOLOGY
- AVAILABLE IN WARM WHITE & COOL WHITE
- STYLISH SLIVER AND WHITE SURROUNDS
- COMPLETE WITH DRIVER, OPTIONAL DIMMER DRIVER
- SQUARE FITTINGS AVAILABLE
- AVAILABLE IN 3W, 6W, 12W, 18W & 24W



Cut Out Sizes:


Model:	D max (mm)
3 Watt	64
6 Watt	105
12 Watt	155
18 Watt	205

3W LED ROUND FLUSH DOWNLIGHT 

3W LED (75lm per Watt), AC85-265VAC,
160° Beam angle, SILVER, BLACK & WHITE
SURROUNDS. **COOL WHITE ($\pm 6000\text{K}$) &
WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**
COMPLETE WITH ELECTRONIC DRIVER



OL-CY03W-CW-N / OL-CY03W-WW-N
OL-CY03S-CW-N / OL-CY03S-WW-N
OL-CY03B-CW-N / OL-CY03B-WW-N




6W LED ROUND FLUSH DOWNLIGHT 

6W LED (75lm per Watt), AC85-265VAC,
160° Beam angle, SILVER, BLACK & WHITE
SURROUNDS. **COOL WHITE ($\pm 6000\text{K}$) &
WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**
COMPLETE WITH ELECTRONIC DRIVER



OL-CY06W-CW-N / OL-CY06W-WW-N
OL-CY06S-CW-N / OL-CY06S-WW-N
OL-CY06B-CW-N / OL-CY06B-WW-N




12W LED ROUND FLUSH DOWNLIGHT 

12W LED (75lm per Watt), AC85-265VAC,
160° Beam angle, SILVER, BLACK & WHITE
SURROUNDS. **COOL WHITE ($\pm 6000\text{K}$) &
WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**
COMPLETE WITH ELECTRONIC DRIVER



OL-CY12W-CW-N / OL-CY12W-WW-N
OL-CY12S-CW-N / OL-CY12S-WW-N
OL-CY12B-CW-N / OL-CY12B-WW-N




18W LED ROUND FLUSH DOWNLIGHT 

18W LED (75lm per Watt), AC85-265VAC,
160° Beam angle, SILVER, BLACK & WHITE
SURROUNDS. **COOL WHITE ($\pm 6000\text{K}$) &
WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**
COMPLETE WITH ELECTRONIC DRIVER



OL-CY18W-CW-N / OL-CY18W-WW-N
OL-CY18S-CW-N / OL-CY18S-WW-N
OL-CY18B-CW-N / OL-CY18B-WW-N



REFER TO PAGES 120 & 121 FOR VOLTAGE STABILISER, CAPACITOR, SPARE DRIVERS & DIMMERS.

6W LED SQUARE FLUSH DOWN LIGHT 

6W LED (75lm per Watt), AC85-265VAC,
160° Beam angle, SILVER & WHITE SURROUNDS.
**COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE
($\pm 2800\text{K}$) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



OL-CYS06W-CW-N / OL-CYS06W-WW-N



OL-CYS06S-CW-N / OL-CYS06S-WW-N



12W LED SQUARE FLUSH DOWNLIGHT 

12W LED (75lm per Watt), AC85-265VAC,
160° Beam angle, SILVER & WHITE SURROUNDS.
**COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE
($\pm 2800\text{K}$) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



OL-CYS12W-CW-N / OL-CYS12W-WW-N



OL-CYS12S-CW-N / OL-CYS12S-WW-N




18W LED SQUARE FLUSH DOWN LIGHT 

18W LED (75lm per Watt), AC85-265VAC,
160° Beam angle, SILVER & WHITE SURROUNDS.
**COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE
($\pm 2800\text{K}$) - NON DIMMABLE**



OL-CYS18W-CW-N / OL-CYS18W-WW-N

OL-CYS18S-CW-N / OL-CYS18S-WW-N



COMPLETE WITH ELECTRONIC DRIVER


24W LED SQUARE FLUSH DOWN LIGHT 

24W LED (75lm per Watt), AC85-265VAC,
160° Beam angle, WHITE SURROUNDS.
**COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE
($\pm 2800\text{K}$) - NON DIMMABLE**




OL-CYS24W-CW-N

OL-CYS24W-WW-N



COMPLETE WITH ELECTRONIC DRIVER



Cut Out Sizes:

6 Watt	105
12 Watt	155
18 Watt	205
24 Watt	280


REFER TO PAGES 120 & 121 FOR VOLTAGE STABILISER, CAPACITOR, SPARE DRIVERS & DIMMERS.

**6W LED ROUND SURFACE
DOWNLIGHT**



6W LED (75lm per Watt), AC85-265VAC, 160° Beam angle, IP20,
**COOL WHITE (±6000K) & WARM WHITE (±2800K) -
NON DIMMABLE**

COMPLETE WITH BUILT-IN ELECTRONIC DRIVER




OL-SMR6W-CW / OL-SMR6W-WW

**12W LED ROUND SURFACE
DOWNLIGHT**



12W LED (75lm per Watt), AC85-265VAC, 160° Beam angle,
IP20, **COOL WHITE (±6000K) & WARM WHITE (±2800K)
- NON DIMMABLE**

COMPLETE WITH BUILT-IN ELECTRONIC DRIVER




OL-SMR12W-CW / OL-SMR12W-WW

**6W LED SQUARE SURFACE
DOWNLIGHT**



6W LED (75lm per Watt), AC85-265VAC, 160° Beam angle, IP20,
**COOL WHITE (±6000K) & WARM WHITE (±2800K) -
NON DIMMABLE**

COMPLETE WITH BUILT-IN ELECTRONIC DRIVER



OL-SMS6W-CW / OL-SMS6W-WW

**12W LED SQUARE SURFACE
DOWNLIGHT**



12W LED (75lm per Watt), AC85-265VAC, 160° Beam angle,
IP20, **COOL WHITE (±6000K) & WARM WHITE (±2800K)
- NON DIMMABLE**

COMPLETE WITH BUILT-IN ELECTRONIC DRIVER



OL-SMS12W-CW / OL-SMS12W-WW

18W LED ROUND SURFACE DOWNLIGHT

18W LED SQUARE SURFACE DOWNLIGHT




18W LED (75lm per Watt), AC85-265VAC, 160° Beam angle, IP20,
COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE


COMPLETE WITH BUILT-IN ELECTRONIC DRIVER



OL-SMR18W-CW / OL-SMR18W-WW



OL-SMS18W-CW / OL-SMS18W-WW



24W LED ROUND SURFACE DOWNLIGHT

24W LED SQUARE SURFACE DOWNLIGHT




24W LED (75lm per Watt), AC85-265VAC, 160° Beam angle, IP20,
COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE


COMPLETE WITH BUILT-IN ELECTRONIC DRIVER



OL-SMR24W-CW / OL-SMR24W-WW



OL-SMS24W-CW / OL-SMS24W-WW



6W LED ROUND SURFACE DOWNLIGHT WITH MAGNETIC COLOUR RING 

6W LED (75lm per Watt), AC85-285VAC, 160° Beam angle, IP20, **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**



OL-CY06W-CW-M / OLCY06W-WW-M

SIZE: 

Magnetic Colour Ring ordered Separately. Please Specify:

OL-CR6-BK	Black Colour Ring 6W	
OL-CR6-BR	Bronze Colour Ring 6W	
OL-CR6-NI	Nickel Colour Ring 6W	
OL-CR6-RG	Rose Gold Colour Ring 6W	

12W LED ROUND SURFACE DOWNLIGHT WITH MAGNETIC COLOUR RING 

12W LED (75lm per Watt), AC85-285VAC, 160° Beam angle, IP20, **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**



OL-CY12W-CW-M / OLCY12W-WW-M

SIZE: 

Magnetic Colour Ring ordered Separately. Please Specify:

OL-CR12-BK	Black Colour Ring 12W	
OL-CR12-BR	Bronze Colour Ring 12W	
OL-CR12-NI	Nickel Colour Ring 12W	
OL-CR12-RG	Rose Gold Colour Ring 12W	

18W LED ROUND SURFACE DOWNLIGHT WITH MAGNETIC COLOUR RING 

18W LED (75lm per Watt), AC85-285VAC, 160° Beam angle, IP20, **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**



OL-CY18W-CW-M / OLCY18W-WW-M

SIZE: 

Magnetic Colour Ring ordered Separately. Please Specify:

OL-CR18-BK	Black Colour Ring 18W	
OL-CR18-BR	Bronze Colour Ring 18W	
OL-CR18-NI	Nickel Colour Ring 18W	
OL-CR18-RG	Rose Gold Colour Ring 18W	

24W LED ROUND SURFACE DOWNLIGHT WITH MAGNETIC COLOUR RING 

24W LED (75lm per Watt), AC85-285VAC, 160° Beam angle, IP20, **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**



OL-CY24W-CW-M / OLCY24W-WW-M

SIZE: 

Magnetic Colour Ring ordered Separately. Please Specify:

OL-CR24-BK	Black Colour Ring 24W	
OL-CR24-BR	Bronze Colour Ring 24W	
OL-CR24-NI	Nickel Colour Ring 24W	
OL-CR24-RG	Rose Gold Colour Ring 24W	



AIR FRAMELESS RANGE

180° BEAM ANGLE
ALL ROUND LIGHT EMITTING DOWNLIGHTS



10W LED ROUND AIR DOWNLIGHT



10W LED (75lm per Watt), AC85-265VAC, 180° Beam angle, WHITE DIFFUSER. **COOL WHITE (±6000K) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



AIR-DLR-10-CW




Suitable for Spot Junction Box



75-90mm

SIZE:



15W LED ROUND AIR DOWNLIGHT



15W LED (75lm per Watt), AC85-265VAC, 180° Beam angle, WHITE DIFFUSER. **COOL WHITE (±6000K) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



AIR-DLR-15-CW




DETACHABLE DRIVER



125mm

SIZE:



18W LED ROUND AIR DOWNLIGHT



18W LED (75lm per Watt), AC85-265VAC, 180° Beam angle, WHITE DIFFUSER. **COOL WHITE (±6000K) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



AIR-DLR-18-CW




DETACHABLE DRIVER



150mm

SIZE:




22W LED ROUND AIR DOWNLIGHT



22W LED (75lm per Watt), AC85-265VAC, 180° Beam angle, WHITE DIFFUSER. **COOL WHITE (±6000K) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER

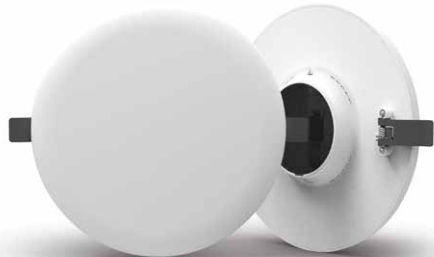

AIR-DLR-22-CW




DETACHABLE DRIVER



205mm

SIZE:



REFER TO PAGES 122 SPARE DRIVERS.

AIR FRAMED RANGE

120° BEAM ANGLE



NEW!

6W LED ROUND AIR PANEL LIGHT




6W LED (75lm per Watt), AC85-265VAC, 120° Beam angle, WHITE DIFFUSER. **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



AIR-PLR-6-CW



SIZE:



NEW!

10W LED ROUND AIR PANEL LIGHT



10W LED (75lm per Watt), AC85-265VAC, 120° Beam angle, WHITE DIFFUSER. **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



AIR-PLR-10-CW



SIZE:



NEW!

15W LED ROUND AIR PANEL LIGHT




15W LED (75lm per Watt), AC85-265VAC, 120° Beam angle, WHITE DIFFUSER. **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



AIR-PLR-15-CW



SIZE:



NEW!

20W LED ROUND AIR PANEL LIGHT




20W LED (75lm per Watt), AC85-265VAC, 120° Beam angle, WHITE DIFFUSER. **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



AIR-PLR-20-CW



SIZE:



REFER TO PAGES 122 SPARE DRIVERS.



-lite®

creating a green legacy

5W LED ROUND DOWNLIGHT




5W LED (80lm per Watt), AC100-240VAC, 38° Beam Angle, White Plastic. **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



OL-PDL-R5-CW / OL-PDL-R5-WW

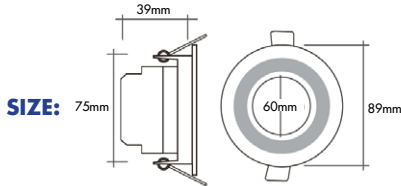

7W LED ROUND DOWNLIGHT




7W LED (80lm per Watt), AC100-240VAC, 38° Beam Angle, White Plastic. **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



OL-PDL-R7-CW / OL-PDL-R7-WW

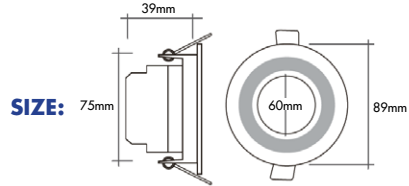

9W LED ROUND DOWNLIGHT




9W LED (80lm per Watt), AC100-240VAC, 60° Beam Angle, White Plastic. **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



OL-PDL-R9-CW / OL-PDL-R9-WW

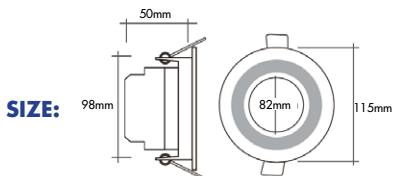

12W LED ROUND DOWNLIGHT




12W LED (80lm per Watt), AC100-240VAC, 60° Beam Angle, White Plastic. **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



OL-PDL-R12-CW / OL-PDL-R12-WW

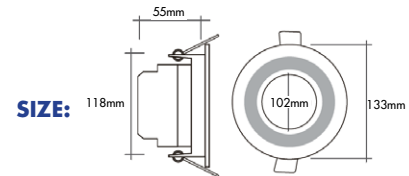

NEW!

3W LED ROUND ADJUSTABLE DOWNLIGHT




3W LED (80lm per Watt), AC220-240VAC, 100° Beam Angle, Black Plastic. **COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



OL-SPDL-R3-CW-BK / OL-SPDL-R3-WW-BK



NEW!

5W LED ROUND ADJUSTABLE DOWNLIGHT




5W LED (80lm per Watt), AC220-240VAC, 100° Beam Angle, Black Plastic. **COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



OL-SPDL-R5-CW-BK / OL-SPDL-R5-WW-BK



NEW!

7W LED ROUND ADJUSTABLE DOWNLIGHT




7W LED (80lm per Watt), AC220-240VAC, 100° Beam Angle, Black Plastic. **COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



OL-SPDL-R7-CW-BK / OL-SPDL-R7-WW-BK




6W LED ROUND ADJUSTABLE DOWNLIGHT



6W LED (80lm per Watt), AC200-240VAC,
WHITE ALUMINIUM SURROUND. **COOL WHITE**
(±6000K) - NON DIMMABLE
COMPLETE WITH ELECTRONIC DRIVER &
CONNECTION BLOCK



OL-924-W-C

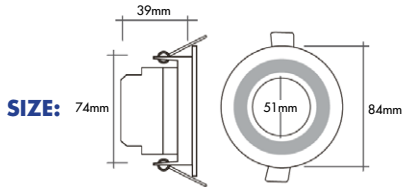


6W LED SQUARE ADJUSTABLE DOWNLIGHT



6W LED (80lm per Watt), AC200-240VAC,
WHITE ALUMINIUM SURROUND **COOL WHITE**
(±6000K) - NON DIMMABLE
COMPLETE WITH ELECTRONIC DRIVER &
CONNECTION BLOCK



OL-925-W-C

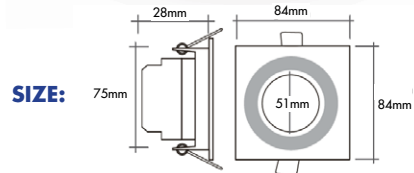


6W LED ROUND FIXED DOWNLIGHT



6W LED (80lm per Watt), AC200-240VAC,
ALUMINIUM SATIN NICKEL SURROUND. **COOL**
WHITE (±6000K) - NON DIMMABLE
COMPLETE WITH ELECTRONIC DRIVER &
CONNECTION BLOCK



OL-821-S-C

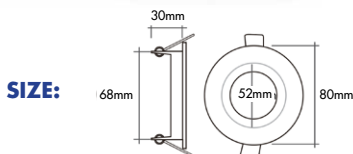


6W LED ROUND ADJUSTABLE DOWNLIGHT



6W LED (80lm per Watt), AC200-240VAC,
ALUMINIUM SATIN NICKEL SURROUND. **COOL**
WHITE (±6000K) - NON DIMMABLE
COMPLETE WITH ELECTRONIC DRIVER &
CONNECTION BLOCK



OL-822-S-C



6W LED SQUARE ADJUSTABLE DOWN LIGHT




6W LED (80lm per Watt), AC200-240VAC, ALUMINIUM SATIN NICKEL SURROUND. **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER & CONNECTION BLOCK



OL-824-S-C



SIZE: 82mm

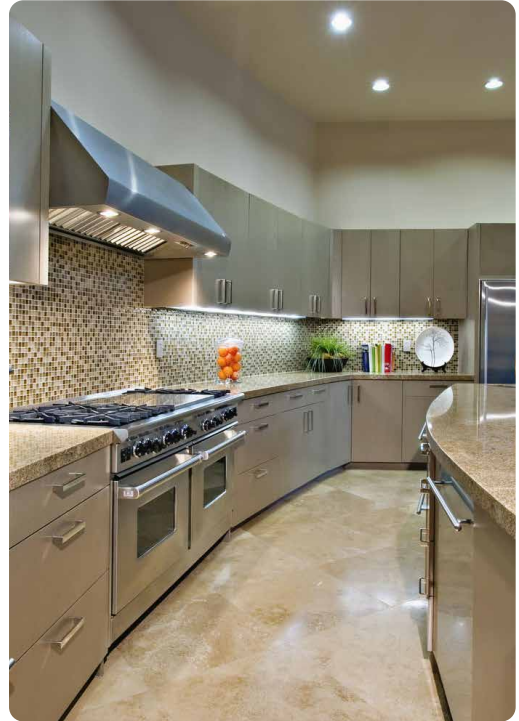

6W 2 PIN LED SPARE LAMP & CONNECTION BLOCK



6W 2 PIN LED LAMP (90lm per Watt), AC220-240VAC, 30mA, CONNECTION BLOCK. **COOL WHITE ($\pm 6500K$) - NON DIMMABLE**



OL-LED2PIN+CB

SPARE LAMP FOR:
OL-924-W-C
OL-925-W-C

6W LED SPARE LAMP & CONNECTION BLOCK



6W LED LAMP (90lm per Watt), AC220-240VAC, 30mA, CONNECTION BLOCK. **COOL WHITE ($\pm 6500K$) - NON DIMMABLE**



OL-LED+CB


SPARE LAMP FOR:
OL-821-S-C
OL-822-S-C
OL-824-S-C

ROUND FIXED DOWNLIGHT FITTING

ROUND FIXED WHITE CAST IRON FITTING ONLY WITH RETAINING SPRING.



OL-8221-W

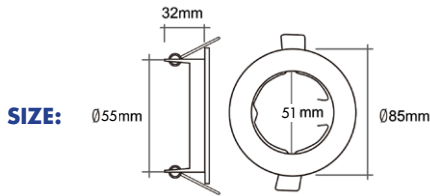


ROUND ADJUSTABLE DOWNLIGHT FITTING

ROUND ADJUSTABLE ALUMINIUM WHITE FITTING ONLY WITH RETAINING SPRING.



OL-802-W

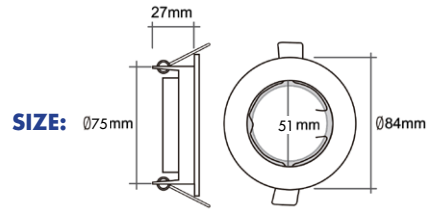


ROUND FIXED DOWNLIGHT FITTING

ROUND FIXED CAST IRON SATIN NICKEL FITTING ONLY WITH RETAINING SPRING.



OL-8221-S

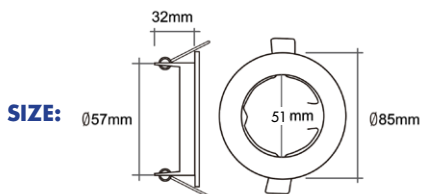


ROUND ADJUSTABLE DOWNLIGHT FITTING

ROUND ADJUSTABLE ALUMINIUM SATIN NICKEL FITTING ONLY WITH RETAINING SPRING.



OL-802-S

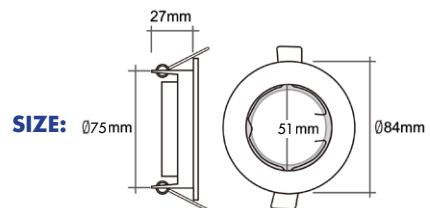


ROUND FIXED DOWNLIGHT FITTING

ROUND FIXED ALUMINIUM SATIN NICKEL FITTING ONLY WITH RETAINING RING



OL-821-S

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

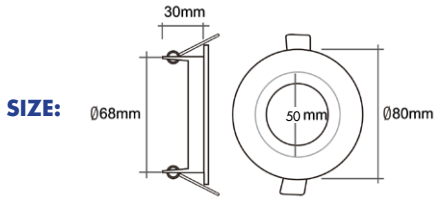


ROUND ADJUSTABLE DOWNLIGHT FITTING

ROUND ADJUSTABLE ALUMINIUM SATIN NICKEL FITTING ONLY WITH RETAINING RING.




OL-822-S

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

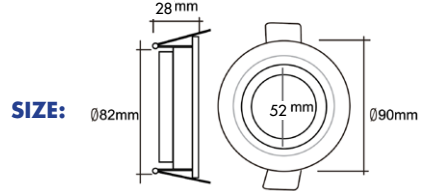


SQUARE ADJUSTABLE DOWNLIGHT FITTING

SQUARE ADJUSTABLE ALUMINIUM SATIN NICKEL FITTING ONLY WITH RETAINING RING

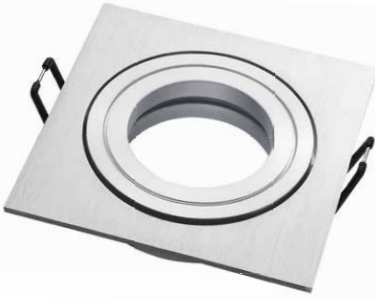

OL-824-S

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

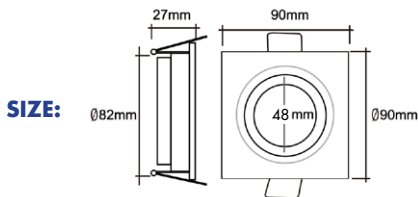

GU10 LAMP HOLDER & CONNECTION BLOCK

GU10 LAMP HOLDER ONLY WITH A CONNECTION BLOCK



OL-GU10LH+CB




ROUND FIXED DOWNLIGHT FITTING

ROUND FIXED WHITE CAST IRON FITTING ONLY.



OL-901-W

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

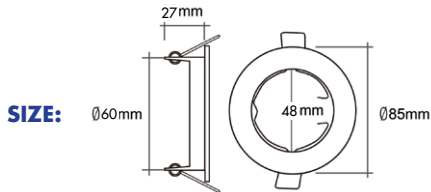


ROUND ADJUSTABLE DOWNLIGHT FITTING

ROUND ADJUSTABLE CAST IRON WHITE FITTING ONLY.



OL-902-W

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

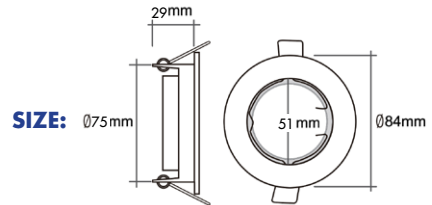


ROUND FIXED DOWNLIGHT FITTING

WHITE ROUND FIXED
PLASTIC FITTING ONLY



OL-1255-W

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

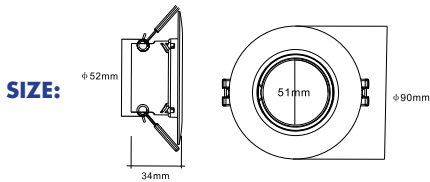


ROUND FIXED DOWNLIGHT FITTING

BLACK ROUND FIXED
PLASTIC FITTING ONLY




OL-1255-B

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

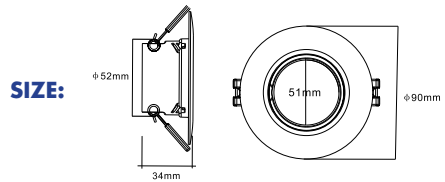


ROUND ADJUSTABLE DOWNLIGHT FITTING

WHITE ROUND ADJUSTABLE
PLASTIC FITTING ONLY



OL-912-W

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

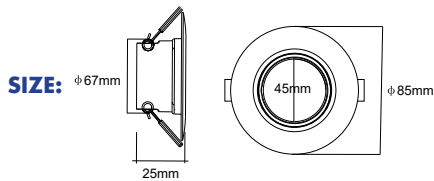


ROUND FIXED DOWNLIGHT FITTING

WHITE ROUND ANTI-GLARE FIXED DEEP
RECESSED PLASTIC FITTING ONLY



OL-01175A-W

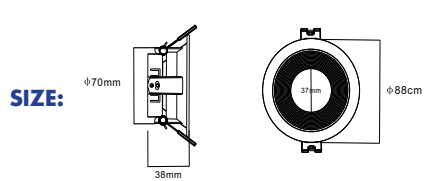


ROUND FIXED DOWNLIGHT FITTING

**BLACK & WHITE ROUND ANTI-GLARE FIXED DEEP
RECESSED PLASTIC FITTING ONLY**



OL-01175A-BW

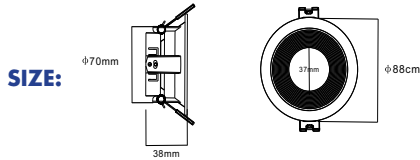


ROUND FIXED DOWNLIGHT FITTING

**BLACK ROUND ANTI-GLARE FIXED DEEP
RECESSED PLASTIC FITTING ONLY**



OL-01175A-B

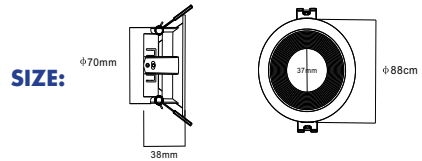


ROUND ADJUSTABLE DOWNLIGHT FITTING

**WHITE ROUND ANTI-GLARE ADJUSTABLE
SHALLOW RECESSED PLASTIC FITTING ONLY**



OL-0575-W

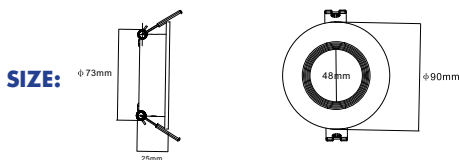


ROUND ADJUSTABLE DOWNLIGHT FITTING

**BLACK ROUND ANTI-GLARE ADJUSTABLE
SHALLOW RECESSED PLASTIC FITTING ONLY**



OL-0575-B

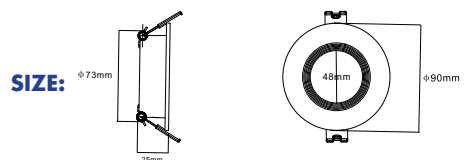


SQUARE ADJUSTABLE DOWNLIGHT FITTING

WHITE SQUARE ANTI-GLARE ADJUSTABLE
SHALLOW RECESSED 1 LAMP PLASTIC FITTING
ONLY



OL-058080-W

SIZE:




RECTANGULAR ADJUSTABLE DOWNLIGHT FITTING

WHITE RECTANGULAR ANTI-GLARE ADJUSTABLE
SHALLOW RECESSED 2 LAMP PLASTIC
FITTING ONLY



OL-0580160-W

SIZE:

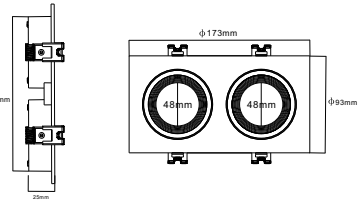



RECTANGULAR ADJUSTABLE DOWNLIGHT FITTING

WHITE RECTANGULAR ANTI-GLARE ADJUSTABLE
SHALLOW RECESSED 3 LAMP PLASTIC
FITTING ONLY



OL-0580240-W

SIZE:

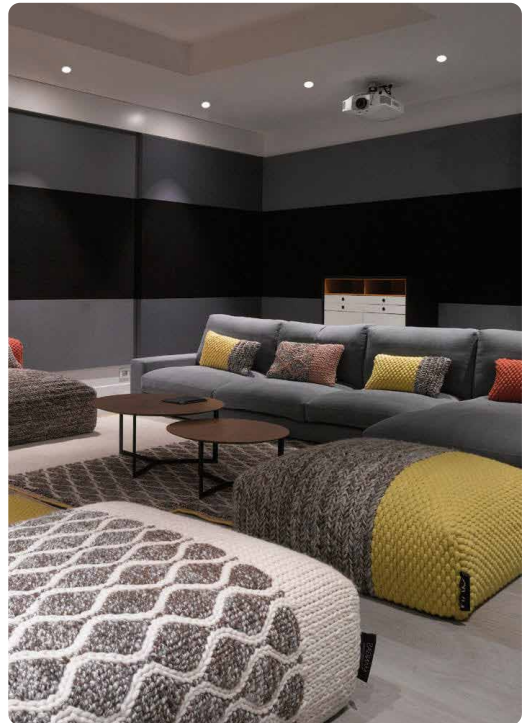



-lite®
creating a green legacy


GU10 LED SPOT LIGHT FITTING



Square, Die Cast Aluminium, 3 Wire,
AC220VAC, 1 x **GU10** (Max 35W), IP20,
**Lamp not included, BLACK & WHITE
FITTING**

OL-GU10SPOT-B/OL-GU10SPOT-W

SIZE:




TRACK, LIGHT FITTING & POWER ADAPTER TO BE ORDERED SEPERATELY.



TRACK LIGHT POWER ADAPTER


AC220VAC, 3 Wire, Power Adapter, IP20,
BLACK & WHITE ADAPTER



OL-PFEED-B/OL-PFEED-W

TRACK LIGHT L-TYPE POWER ADAPTER

AC220VAC, 3 Wire, Power Adapter, IP20,
BLACK & WHITE ADAPTER

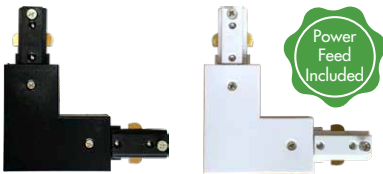

OL-LCON-B/OL-LCON-W

TRACK LIGHT T-TYPE POWER ADAPTER

AC220VAC, 3 Wire, Power Adapter, IP20,
BLACK ADAPTER



OL-TCON-B

1 METER TRACK

1 Meter, Die Cast Aluminium, 3 Wire,
AC220VAC, IP20, **Power Adapter**
not included, BLACK & WHITE TRACK
FITS A MAX OF 4 LIGHT FITTINGS



OL-1TRACK-B/OL-1TRACK-W

TRACK LIGHT I-TYPE ADAPTER

BLACK & WHITE ADAPTER



OL-ICON-B/OL-ICON-W

TRACK LIGHT T-TYPE POWER ADAPTER

AC220VAC, 3 Wire, Power Adapter, IP20,
WHITE ADAPTER



OL-TCON-W

NEW! **16W BACKLIT LED SQUARE PANEL LIGHT** 

16W LED (80lm per Watt), AC220-240VAC, IP20, **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



EBL-LED300-CW

SIZE:



NEW! **40W BACKLIT LED SQUARE PANEL LIGHT** 


40W LED (90lm per Watt), AC220-240VAC, IP20, **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**




EBL-LED600-CW

SIZE:




NEW! **76W LED BACKLIT RECTANGULAR PANEL LIGHT** 

76W LED (90lm per Watt), AC220-240VAC, IP20, **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



EBL-LED1.2-CW

SIZE:

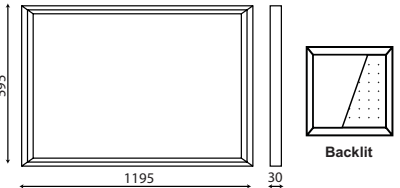

REFER TO PAGE 88 FOR BATTERY BACK UP KITS & PAGE 122 FOR SPARE DRIVERS

CEILING MOUNT FIXTURE



EBL-LEDCMF3X3 300x300x50mm for LED300CW

EBL-LEDCMF6X6 600x600x50mm for LED600CW

EBL-LEDCMF1,2X6 1200x600x50mm for LED1.2CW

HANGING (SUSPENDED) FIXTURE



EBL-LEDHF3 Suspended Fixture for LED300CW

EBL-LEDHF6 Suspended Fixture for LED600CW

EBL-LEDHF12 Suspended Fixture for LED1.2CW

SPRING BUCKLE FIXTURES



EBL-LEDSPI3 Spring buckle Fixture for LED300CW

EBL-LEDSPI6 Spring buckle Fixture for LED600CW

EBL-LEDSPI12 Spring buckle Fixture for LED1.2CW



20W 4 FOOT T8 GLASS TUBE




20W LED (80lm per Watt), AC180-265VAC,
Single Sided Isolated, **COOL WHITE (±6000K)**
& **WARM WHITE (±2800K)**



LED4FT20W-CW / LED4FT20W-WW

SIZE:



20W 5 FOOT T8 GLASS TUBE




20W LED (80lm per Watt), AC180-265VAC,
Single Sided Isolated, **COOL WHITE (±6000K)**
& **WARM WHITE (±2800K)**



LED5FT20W-CW / LED5FT20W-WW

SIZE:



NOTE: GLASS TUBES CANNOT BE USED IN IP65 FITTINGS. ONLY TO BE USED IN OPEN CHANNEL FITTINGS.

WEATHERPROOF TUBE FITTINGS

IP65, DOUBLE LED TUBE FITTING ONLY



****FOR SINGLE SIDED TUBES ONLY**

OL-2F-LED

2 Foot IP65 Double LED Fitting

OL-4F-LED

4 Foot IP65 Double LED Fitting

OL-5F-LED

5 Foot IP65 Double LED Fitting

INDOOR TUBE FITTINGS

IP20, DOUBLE LED TUBE FITTING ONLY



****FOR SINGLE SIDED TUBES ONLY**

OL-2S-D

2 Foot IP20 Double LED Fitting

OL-4S-D

4 Foot IP20 Double LED Fitting

OL-5S-D

5 Foot IP20 Double LED Fitting


20W 2 FOOT LED IP65 FITTING



20W LED (80lm per Watt), AC110-240VAC,
Single Sided Isolated, **COOL WHITE (±6000K)**
COMPLETE FITTING



OL-2F-LED-C




40W 4 FOOT LED IP65 FITTING



40W LED (80lm per Watt), AC110-240VAC,
Single Sided Isolated, **COOL WHITE (±6000K)**
COMPLETE FITTING



OL-4F-LED-C



50W 5 FOOT LED IP65 FITTING



50W LED (80lm per Watt), AC110-240VAC,
Single Sided Isolated, **COOL WHITE (±6000K)**
COMPLETE FITTING



OL-5F-LED-C



NEW!


20W 2 FOOT LED IP20 FITTING



20W LED (70lm per Watt), AC175-265VAC,
Single Sided Non-Isolated, **COOL WHITE**
(±6500K) **COMPLETE FITTING**



OL-BAT-2S-20W



NEW!


40W 4 FOOT LED IP20 FITTING



40W LED (70lm per Watt), AC175-265VAC,
Single Sided Non-Isolated, **COOL WHITE**
(±6500K) **COMPLETE FITTING**



OL-BAT-4S-40W



NEW!


72W 4 FOOT LED IP20 FITTING



72W LED (80lm per Watt), AC175-265VAC,
Single Sided Non-Isolated, **COOL WHITE**
(±6500K) **COMPLETE FITTING**



OL-BAT-4S-72W



NEW!


48W 5 FOOT LED IP20 FITTING



48W LED (70lm per Watt), AC175-265VAC,
Single Sided Non-Isolated, **COOL WHITE**
(±6500K) **COMPLETE FITTING**



OL-BAT-5S-48W



RESPIRO 4 BLADE CEILING FAN WITH 18W LED LIGHT



4 Blade Ceiling Fan, White Motor, Plywood Blades,
Blade Size: 1200mm, 70W 3 Speed Silent 200-
240VAC Motor. **WARM WHITE ($\pm 2800K$),
NATURAL WHITE ($\pm 4000K$), COOL WHITE
($\pm 6000K$) - NON DIMMABLE**



OLF-300WH

SPIRADO 4 BLADE CEILING FAN WITH 18W LED LIGHT



4 Blade Ceiling Fan, White Motor, 1 White Plywood
Blades, Blade Size: 1200mm, 70W 3 Speed Silent
200-240VAC Motor. **WARM WHITE ($\pm 2800K$),
NATURAL WHITE ($\pm 4000K$), COOL WHITE
($\pm 6000K$) - NON DIMMABLE**



OLF-301WH

VENTO 3 BLADE CEILING FAN WITH 24W LED LIGHT



3 Blade Ceiling Fan, Black Motor, Wood Blades,
Blade Size: 1200mm, 70W 3 Speed Silent 200-
240VAC Motor. **WARM WHITE ($\pm 2800K$),
NATURAL WHITE ($\pm 4000K$), COOL WHITE
($\pm 6000K$) - NON DIMMABLE**



OLF-305BW

MIRAN 3 BLADE CEILING FAN WITH 18W LED LIGHT



3 Blade Ceiling Fan, White Motor, White ABS Plastic
Blades, Blade Size: 1320mm, 90W 3 Speed Silent
200-240VAC Motor. **WARM WHITE ($\pm 2800K$),
NATURAL WHITE ($\pm 4000K$), COOL WHITE
($\pm 6000K$) - NON DIMMABLE**



OLF-317WP

ALL FANS ARE SUPPLIED WITH A REMOTE IN THE BOX &
2 DOWN ROD LENGTHS IN 12.5cm or 25cm

Remote Timer Setting : 1,2,4 & 8 Hours

SILENTA 5 BLADE CEILING FAN WITH 18W LED LIGHT



5 Blade Ceiling Fan, White Motor, White Plywood Blades, Blade Size: 1320mm, 70W 3 Speed Silent 200-240VAC Motor. **WARM WHITE ($\pm 2800K$), NATURAL WHITE ($\pm 4000K$), COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



REMOTE SELECTABLE

OLF-315WH

SILENTA 5 BLADE CEILING FAN WITH 18W LED LIGHT



5 Blade Ceiling Fan, Sand Nickel Motor, Mahogany Blades, Blade Size: 1320mm, 70W 3 Speed Silent 200-240VAC Motor. **WARM WHITE ($\pm 2800K$), NATURAL WHITE ($\pm 4000K$), COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



REMOTE SELECTABLE

OLF-315SW

DUAL CIRCULATION ARIOSOA 3 BLADE CEILING FAN

3 Blade Ceiling Fan, Black Motor, Black ABS Blades, Blade Size: 1420mm, 35W 3 Speed Silent 200-240VAC Motor. ***NB 3 forward settings for cooling in summer & 3 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts**



SUMMER & WINTER APPLICATION

OLF-147BL

ELICA 3 BLADE CEILING FAN

3 Blade Ceiling Fan, Sand Nickel Motor, Mahogany Blades, Blade Size: 1320mm, 70W 3 Speed Silent 200-240VAC Motor.



OLF-193BW

SPARE REMOTE

OLF-REM

Spare Remote for OLF Fan Range

NEW!

AQUILA DUAL CIRCULATION 55W LED 3 BLADE CEILING FAN



3 Blade Ceiling Fan, Black Motor, Retractable Transparent ABS Blades, Blade Size: 1060mm, 35W 6 Speed Silent 200VAC Motor. **WARM WHITE ($\pm 2800K$), NATURAL WHITE ($\pm 4000K$), COOL WHITE ($\pm 6000K$) - NON DIMMABLE**
***NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts**



SUMMER & WINTER APPLICATION
RETRACTABLE BLADES



OLF-3CCT-B

NEW!

AQUILA DUAL CIRCULATION 55W LED 3 BLADE CEILING FAN



3 Blade Ceiling Fan, White Motor, Retractable Transparent ABS Blades, Blade Size: 1060mm, 35W 6 Speed Silent 200VAC Motor. **WARM WHITE ($\pm 2800K$), NATURAL WHITE ($\pm 4000K$), COOL WHITE ($\pm 6000K$) - NON DIMMABLE**
***NB 6 forward settings for cooling in summer & 1 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts**



SUMMER & WINTER APPLICATION
RETRACTABLE BLADES



OLF-3CCT-W

SPARE REMOTE

OLF-RMT

Spare Remote for OLF-3CCT Fans



**FAN BLADES RETRACT
ONCE THE FAN FUNCTION
IS SWITCHED OFF**

ALL FANS ARE SUPPLIED WITH A REMOTE IN THE BOX


NEW!

12W EXTRACTOR FAN WITH INDICATION

12W Extractor Fan, Frequency: 50Hz,
Speed (RPM): 2300, Air Flow: 80, 220-240VAC
Motor. **WHITE**



EFI-G4A-12W




NEW!

15W EXTRACTOR FAN WITH INDICATION

15W Extractor Fan, Frequency: 50Hz,
Speed (RPM): 2000, Air Flow: 150, 220-240VAC
Motor. **WHITE**



EFI-G5A-15W




NEW!

20W EXTRACTOR FAN WITH INDICATION

20W Extractor Fan, Frequency: 50Hz,
Speed (RPM): 1500, Air Flow: 250, 220-240VAC
Motor. **WHITE**



EFI-G6A-20W



NEW!

28W EXTRACTOR FAN





28W Extractor Fan, Frequency: 50Hz,
Speed (RPM): 1650, Air Flow: 480, 220-240VAC
Motor. **WHITE**



EF-AR-28W

SIZE:



NEW!

32W EXTRACTOR FAN





32W Extractor Fan, Frequency: 50Hz,
Speed (RPM): 1280, Air Flow: 760, 220-240VAC
Motor. **WHITE**



EF-AR-32W

SIZE:



IP20 LED STRIP LIGHTS



IP20, 5m, Self Adhesive, Complete with Power adapter. **COOL WHITE, WARM WHITE, RED, GREEN, BLUE & YELLOW**



OL-6020
SIZE: 5m

JOIN CONNECTORS FOR OL-6020 & OL-6065

JOIN CONNECTORS



OL-CON
ONLY FOR OL-6020



OL-CON-IP65
ONLY FOR OL-6065

IP65 LED STRIP LIGHTS



IP65, 5m, Self Adhesive, Complete with Power adapter. **COOL WHITE, WARM WHITE, RED, GREEN, BLUE & YELLOW**



OL-6065
SIZE: 5m

POWER ADAPTER

12VDC 2A Power Supply Adapter (24W) **TO BE USED WITH OL-6020 & OL-6065**



OL-2A



IP20 LED STRIP LIGHTS



IP20, 5m, Self Adhesive, Complete with Power adapter & Remote. **RGB COLOUR CHASING LIGHTS.**



OL-M5020-RGB

SIZE: 5m



IP65 LED STRIP LIGHTS



IP65, 5m, Self Adhesive, Complete with Power adapter & Remote. **RGB COLOUR CHASING LIGHTS.**



OL-M5065-RGB

SIZE: 5m



IP20 LED STRIP LIGHTS



IP20, 5m, Self Adhesive, Complete with Power adapter & Remote. **RGB 16 COLOUR CHANGING LIGHTS.**



OL-C5020-RGB

SIZE: 5m



IP65 LED STRIP LIGHTS



IP65, 5m, Self Adhesive, Complete with Power adapter & Remote. **RGB 16 COLOUR CHANGING LIGHTS.**



OL-C5065-RGB

SIZE: 5m



POWER ADAPTER


12VDC 6A Power Supply Adapter **TO BE USED WITH OL-M5020-RGB, OL-M5065-RGB, OL-C5020-RGB, OL-C5065-RGB.**



OL-6A



NEW LED NEON FLEX STRIP LIGHTS

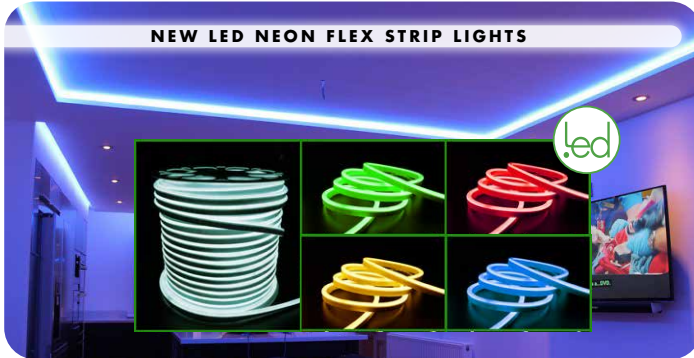

IP65, 10m.
Complete with power adapter,
2x end caps, 1x middle joint
connector, 5x aluminium
mounting clips.

**COOL WHITE, WARM
WHITE, RED, GREEN, BLUE,
YELLOW**

**LEDFLEX-CW-10M, LEDFLEX-WW-10M,
LEDFLEX-R-10M,
LEDFLEX-G-10M, LEDFLEX-B-10M,
LEDFLEX-Y-10M**

IP65 LED NEON FLEX COLOUR CHANGING

IP65, 10m, Complete with RGB controller & power supply, 2x end caps, 1x middle joint connector,
5x aluminium mounting clips, **COLOUR CHANGING RGB**



LEDFLEX-RGB-10M

LED NEON FLEX ACCESSORIES

NEON FLEX RGB CONTROLLER

RGB Controller with power supply.



OL-RGBCONT

POWER ADAPTER

2A Power Supply **TO BE USED WITH
SINGLE COLOUR NEON FLEX**



OL-2A-FLEX

MIDDLE JOINT CONNECTOR

Middle Joint Connectors for Neon Flex



OL-MID-2PIN for Single Colours
OL-MID-4PIN for RGB

END CAP

End Cap for Neon Flex



OL-END-SMALL for Single Colours
OL-END-RGB for RGB

MOUNTING CLIP

Aluminium Mounting Clips
PACK OF 5



OL-AMCLIPS-2835 for Single Colours
OL-AMCLIPS-RGB for RGB



21W LED STRING LIGHT



1,4W Per LED Bulb, 15 Super Bright LED Bulbs, 15 Meters, AC100-240VAC, Straight Filament, IP65, **WARM WHITE (±2800K) - NON DIMMABLE**

OL-STR-15-21W

OL-STR-1W-SB - 1,4W SPARE LED BULB

NEW!



21W COLOUR LED STRING LIGHT



1,4W Per LED Bulb, 15 Super Bright LED Bulbs, 15 Meters, AC100-240VAC, Straight Filament, IP65, **RGB (±2800K) - NON DIMMABLE**

OL-STR-15-21W-RGB

OL-STR-1W-SB-R - 1,4W RED SPARE LED BULB

OL-STR-1W-SB-G - 1,4W GREEN SPARE LED BULB

OL-STR-1W-SB-B - 1,4W BLUE SPARE LED BULB

NEW!



20W LED FAIRY LIGHTS



0,05W Per LED Light, 400 Super Bright LED's, 50 Meters, 220VAC, IP44, **WARM WHITE (±2800K) - NON DIMMABLE**

FL-50M-WW

**Connect A Maximun of 3 x 50 Meters
On 1 x Power Supply**

SPARE POWER SUPPLY

FL-50M-CON

Power Supply, IP44, 220VAC




LED EXIT LIGHT - SURFACE MOUNT



3W LED. Double sided fitting with reflector.
3 Hour emergency battery backup. Complete with 3
 Legends (EXIT left, right or forward).
SURFACE MOUNT



LEEXIT-SURFACE




3W LED EMERGENCY LIGHT



220-240VAC, Battery = Ni-Cd 3.6V 2200mAh,
 Recharging Time = 24 Hours, **3 Hour emergency
 battery backup.**



LEDEMER-3W



Cut Out Size : 32mm

10W LED EMERGENCY BATTERY BACK-UP KIT



48W Input Power, Battery = Ni-Cd 7.2V 4400mAh,
 Recharging Time = 24 Hours, **3 Hour emergency
 battery backup.**



LED-BB10W



**Suitable For: EBL-LED600CW x 1 per light &
 EBL-LED1.2CW x 2 per light**

REFER TO PAGE 74



10W LED FLOODLIGHT




10W LED (80lm per Watt), AC200-240VAC,
120° Beam angle, IP65, ***COOL WHITE**
(±6000K) & **WARM WHITE** (±2800K),
BLACK FITTING



CFBN-10-CW

SIZE:



20W LED FLOODLIGHT




20W LED (80lm per Watt), AC200-240VAC,
120° Beam angle, IP65, ***COOL WHITE**
(±6000K) & **WARM WHITE** (±2800K),
BLACK FITTING



CFBN-20-CW

SIZE:



30W LED FLOODLIGHT




30W LED (80lm per Watt), AC200-240VAC,
120° Beam angle, IP65, ***COOL WHITE**
(±6000K) & **WARM WHITE** (±2800K),
BLACK FITTING



CFBN-30-CW

SIZE:



50W LED FLOODLIGHT




50W LED (80lm per Watt), AC200-240VAC,
120° Beam angle, IP65, ***COOL WHITE**
(±6000K) & **WARM WHITE** (±2800K),
BLACK FITTING



CFBN-50-CW


SIZE:




100W LED FLOODLIGHT



100W LED (80lm per Watt), AC200-240VAC,
120° Beam angle, IP65, ***COOL WHITE**
(±6000K) & **WARM WHITE** (±2800K)
BLACK FITTING



CFBN-100-CW




150W LED FLOODLIGHT



150W LED (80lm per Watt), AC200-240VAC,
120° Beam angle, IP66, ***COOL WHITE**
(±6000K) **BLACK FITTING**



CFBN-150-CW





200W LED FLOODLIGHT



200W LED (80lm per Watt), AC200-240VAC,
120° Beam angle, IP66, ***COOL WHITE**
(±6000K) **BLACK FITTING**



CFBN-200-CW

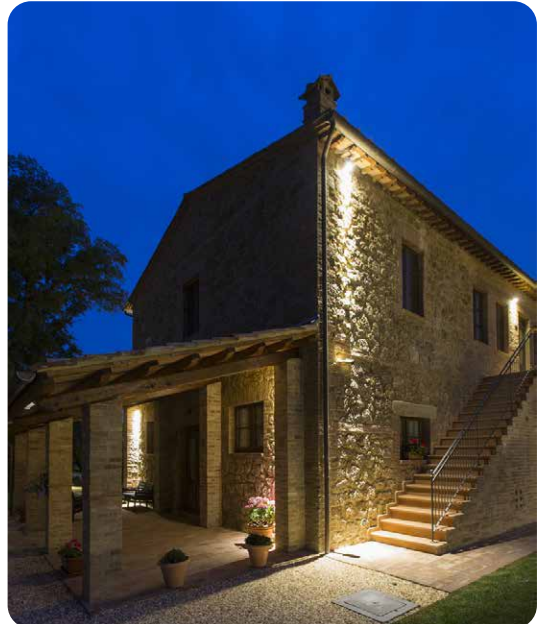

NEW!




200W LED FLOODLIGHT



200W LED (120lm per Watt),
175-265VAC/6KV L-N-E, 90° Beam angle, IP67,
***COOL WHITE (±6500K) GREY FITTING**

OF02-200W

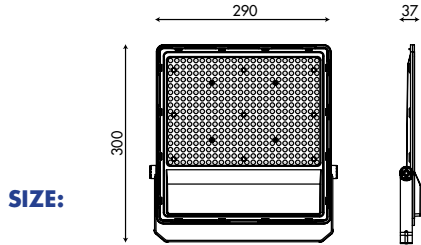

NEW!




300W LED FLOODLIGHT



300W LED (120lm per Watt),
175-265VAC/6KV L-N-E, 90° Beam angle, IP67,
***COOL WHITE (±6500K) GREY FITTING**

OF02-300W

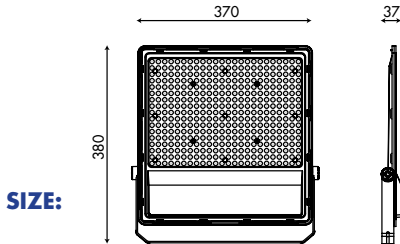

NEW!




400W LED FLOODLIGHT



400W LED (120lm per Watt),
175-265VAC/6KV L-N-E, 90° Beam angle, IP67,
***COOL WHITE (±6500K) GREY FITTING**

OF02-400W

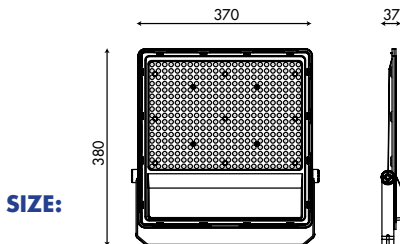


25W SOLAR LED FLOODLIGHT



Lithium Iron Phosphate 5Ah Battery, 6V/8W Photovoltaic Panel (270 x 180mm), 8-10 Hour Discharge Time, Intelligent Optical Control + Remote Control, Waterproof Cable, U Frame, IP67 ***COOL WHITE ($\pm 6000K$) BLACK FITTING**



SIZE:




40W SOLAR LED FLOODLIGHT



Lithium Iron Phosphate 6Ah Battery, 6V/12W Photovoltaic Panel (350 x 235mm), 8-10 Hour Discharge Time, Intelligent Optical Control + Remote Control, Waterproof Cable, U Frame, IP67 ***COOL WHITE ($\pm 6000K$) BLACK FITTING**



SIZE:




60W SOLAR LED FLOODLIGHT



Lithium Iron Phosphate 12Ah Battery, 6V/18W Photovoltaic Panel (350 x 350mm), 8-10 Hour Discharge Time, Intelligent Optical Control + Remote Control, Waterproof Cable, U Frame, IP67 ***COOL WHITE ($\pm 6000K$) BLACK FITTING**



SIZE:




100W SOLAR LED FLOODLIGHT



Lithium Iron Phosphate 18Ah Battery, 6V/25W Photovoltaic Panel (460 x 350mm), 8-10 Hour Discharge Time, Intelligent Optical Control + Remote Control, Waterproof Cable, U Frame, IP67 ***COOL WHITE ($\pm 6000K$) BLACK FITTING**



SIZE:






200W SOLAR LED FLOODLIGHT



Lithium Iron Phosphate 18Ah Battery, 5V/25W Photovoltaic Panel (430 x 350mm), 8-10 Hour Discharge Time, Brightness Control + Sensor (6-8 Meters Detection Area) + Remote Control, 5 Meter Cable, IP65

***COOL WHITE ($\pm 6000K$) BLACK FITTING**
SFL-200W-CW

SIZE:

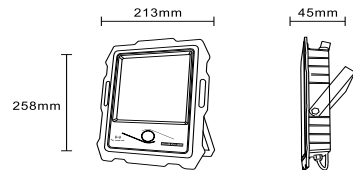


300W SOLAR LED FLOODLIGHT



Lithium Iron Phosphate 24Ah Battery, 5V/28W Photovoltaic Panel (500 x 350mm), 8-10 Hour Discharge Time, Brightness Control + Sensor (6-8 Meters Detection Area) + Remote Control, 5 Meter Cable, IP65

***COOL WHITE ($\pm 6000K$) BLACK FITTING**
SFL-300W-CW

SIZE:




400W SOLAR LED FLOODLIGHT



Lithium Iron Phosphate 30Ah Battery, 5V/35W Photovoltaic Panel (580 x 350mm), 8-10 Hour Discharge Time, Brightness Control + Sensor (6-8 Meters Detection Area) + Remote Control, 5 Meter Cable, IP65

***COOL WHITE ($\pm 6000K$) BLACK FITTING**
SFL-400W-CW

SIZE:






100W SOLAR LED FLOODLIGHT WITH WI-FI CCTV CAMERA



Lithium Iron Phosphate 18Ah Battery, 5V/20W Photovoltaic Panel (350 x 350mm), 12-14 Hour Discharge Time, Brightness Control + Sensor (6-8 Meters Detection Area) + Remote Control, Wi-Fi, 4mm 1080P Camera, 5 Meter Cable, IP65
***COOL WHITE ($\pm 6000K$), BLACK FITTING**

CCTV-SFL-100W-CW

SIZE:




200W SOLAR LED FLOODLIGHT WITH WI-FI CCTV CAMERA



Lithium Iron Phosphate 24Ah Battery, 5V/28W Photovoltaic Panel (500 x 350mm), 12-14 Hour Discharge Time, Brightness Control + Sensor (6-8 Meters Detection Area) + Remote Control, Wi-Fi, 4mm 1080P Camera, 5 Meter Cable, IP65
***COOL WHITE ($\pm 6000K$), BLACK FITTING**

CCTV-SFL-200W-CW

SIZE:




300W SOLAR LED FLOODLIGHT WITH WI-FI CCTV CAMERA



Lithium Iron Phosphate 30Ah Battery, 5V/35W Photovoltaic Panel (580 x 350mm), 12-14 Hour Discharge Time, Brightness Control + Sensor (6-8 Meters Detection Area) + Remote Control, Wi-Fi, 4mm 1080P Camera, 5 Meter Cable, IP65
***COOL WHITE ($\pm 6000K$), BLACK FITTING**

CCTV-SFL-300W-CW

SIZE:





400W SOLAR LED FLOODLIGHT WITH WI-FI CCTV CAMERA 

Lithium Iron Phosphate 42Ah Battery, 5V/40W Photovoltaic Panel (630 x 350mm), 12-14 Hour Discharge Time, Brightness Control + Sensor (6-8 Meters Detection Area) + Remote Control, Wi-Fi, 4mm 1080P Camera, 5 Meter Cable, IP65

***COOL WHITE ($\pm 6000K$), BLACK FITTING**

CCTV-SFL-400W-CW

SIZE:



These lights support offsite monitoring via Wi-Fi (ensure that wi-fi signal strength is sufficient) using a smart phone application.

Download the App "TuyaSmart"



Live video

Take photos

Talk back

Playback video

Settings
(Settings for sharing, storing, removing devices, etc.)

Record video

Motion detection alarm

Light switch and timed light

NEW!




20W SOLAR LED EMERGENCY CHARGING LIGHT



2400 mAh Lithium Battery, DC5V Photovoltaic Panel,
Power Adapter DC5V/1A
4-6 Hours Discharge Time, IP44

***COOL WHITE (±6000K), WHITE FITTING**
IDEAL FOR CAMPING, STUDIES, BRAAI'S, TRAVELLING & MORE

OL-LSB-20W

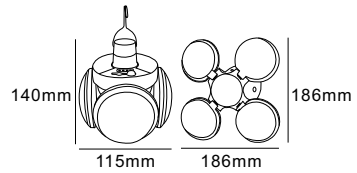

SIZE:

NEW!



SIZE:



SOLAR LED STRING LIGHT



2200 mAh Battery, 2W Poly Panel, 5 Meters,
10 Piece E27 3V S14 Bulbs, 5 Meters,
Straight Filament, 0.5m2 Cable, IP44,

***WARM WHITE (±3000K), BLACK FITTING**

SSL10-S14-WW

SSL10-S14-WW-SB
0,5W 3V SPARE LED BULB

NEW!



6W 15 METER SOLAR LED FAIRY LIGHT



1200 mAh Battery, DC3V Poly Panel, 15 Meters,
150 LED Lights, 8 Lighting Modes, 4-12Hours
Discharge Time, Remote Control, IP44,

***WARM WHITE (±3000K), BLACK FITTING**

FLS-15M-WW

20W 50 METER SOLAR LED FAIRY LIGHT



1200 mAh Battery, DC24V Poly Panel, 50 Meters,
500 LED Lights, 8 Lighting Modes, 4-12 Hours
Discharge Time, Remote Control, IP44,

***WARM WHITE (±3000K), BLACK FITTING**

FLS-50M-WW

NEW!



Can be installed on balconies, pot plants, gutters etc.


5W SOLAR LED MULTI-FUNCTIONAL LIGHT



3.7V/1200 mAh | 18650 Lithium Battery,
5V/180mAh Poly Panel,
4 Hours Discharge Time
2.5 - 3.5 Meters Mounting Height, IP44
***COOL WHITE ($\pm 6000K$), BLACK FITTING**

SGL-5W-BS-CW

SIZE:

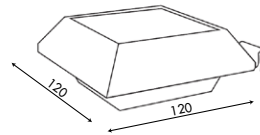

NEW!



Can be installed on balconies, pot plants, gutters etc.


7W SOLAR LED MULTI-FUNCTIONAL LIGHT WITH SENSOR



3.7V/1200 mAh | 18650 Lithium Battery,
5.5V/140mAh Poly Panel,
4 Hours Discharge Time
2.5 - 3.5 Meters Mounting Height, Sensor, IP44
***COOL WHITE ($\pm 6000K$), MOUNTING BRACKET, BLACK FITTING**

SLS-7W-CW-S

SIZE:



NEW!




10W SOLAR LED WALL LIGHT WITH SENSOR



3.7V/2400 mAh | 18650 Lithium Battery,
5.5V/240mAh Poly Panel,
4 Hours Discharge Time
2.5 - 3.5 Meters Mounting Height, Sensor, IP44
***COOL WHITE ($\pm 6000K$), BLACK FITTING**

SLS-10W-CW-S

SIZE:

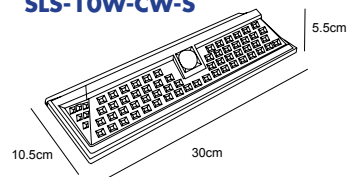

NEW!



**GO
GREEN**

FOR A CLEAN & RELIABLE FUTURE



SOLAR LED BOLLARD LIGHT






1.5W LED, 12Ah Battery 38.4WH,
Solar Panel 6.2W/5V, *4-5hours Charge Time,
36hours Discharge Time,
Aluminium + PC Lens + Tempered Glass,
PIR Motion Sensor, 1-2 meter Detection Distance,
120° Beam Angle,
***WARM WHITE (±3000K), BLACK FITTING,
IP65**

PHARAOH

**Can be installed in gardens, residential areas,
courtyards, roads & parking lots.**

Battery Reserve Feature

4H at 100% + 13H at 75%, once sensor
is triggered the light operates at 100%,
helping to reserve battery power

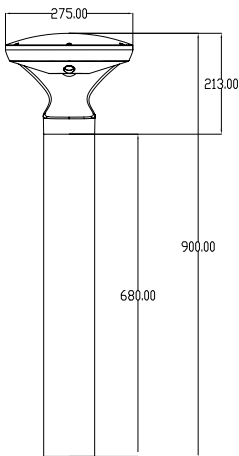

NEW!



GO GREEN

FOR A CLEAN & RELIABLE FUTURE

- **NO WIRING**
- **REMOTE CONTROLLABLE**
- **BLUETOOTH**
- **IOS & ANDROID APP AVAILABLE**



SOLAR LED GARDEN LIGHT



40W LED, 48Ah Battery, Solar Panel 40W/4V,
*6-8hours Charge Time, 2-3 Days Discharge Time,
Intelligent Optical Control + Remote Control + IOS &
Andriod App + Bluetooth Music Rhythm,
Aluminium + PC Lens, IP65, Black Spliced Galvanized
4 Meter Pole Consisting Of 4 x 1 Meter Interlocking
Sections To Be Fastened With Supplied Screws
4M INSTALLATION HEIGHT,
***WARM WHITE, COOL WHITE & RGB (±3500**
- 6000K), GREY FITTING

CHRONUS

This product is made up of integrated parts
(solar panel, lithium battery, LED, MPPT controller)
**Can be installed in gardens, residential areas,
courtyards, roads & parking lots.**

***POLE INCLUDED**

CHRONUS-RMT

Spare Remote For Chronus



NEW!


**SP-20A60W
SP-40A80W | SP-50A100W**

- Photovoltaic charging + BMS integration: During operation, SOC calibration is accurate.
- Intelligent BMS: System parameters can be adjusted using RS485 port.
- Heating function: It will work in low temperature climates.
- Intelligent sleep function: ensures safety and energy saving during storage & transportation.
- High and low temperature charge and discharge protection: will work normally under harsh outdoor conditions.
- Just add a WiFi/4G/5G Camera.


COMPONENT	PARAMETER	SP-20A60W	SP-40A80W	SP-50A100W
Solar Panel	Rated Power	60W	80W	100W
	Open Circuit Voltage	18.47V	19.2V	19.13V
	Short Circuit Current	3.95A	5.04A	5.34A
	Operating Voltage	15.99V	16.65V	16.55V
	Working Current	3.75A	4.81A	6.04A
	Module Efficiency	19.35%		
	Power Tolerance	0, +4.99W		
	Maximum System Voltage	700Vdc (IEC / UL)		
Battery	Battery Type	Ternary lithium battery		
	Cell Model	18650	18650	18650
	Cell Capacity	2000mAh	2000mAh	2000mAh
	Cell Combination	3S16P	3S20P	3S20P
	Rated Voltage	11.1V		
	Nominal Capacity	20AH	40AH	50AH
	Operating Temperature Range	-30°C-70°C		
	Maximum Charging current	10A		
Structure	Maximum Discharge current	<10A		
	Dimensions	530*630*95mm		
	Weight	8kg	9.5kg	14kg
Standard Average Power For Camera	MaxCamera Power (W)	6W	8W	10W
	Battery Life On Rainy or Cloudy Days	3 Days +		



JUST ADD A WIFI/4G/5G CAMERA

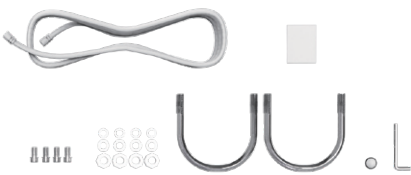

INCLUDES: SOLAR PANEL, BATTERY, MOUNTING SCREWS, BRACKETS & COMMUNICATION CABLES

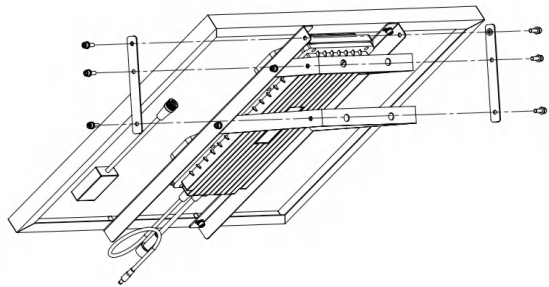



**LED UFO
HIGH BAY LIGHT**



-lite®

creating a green legacy

100W LED UFO HIGH BAY




100W LED (100lm per Watt), AC100-240VAC, 4KV Surge Protection Rating, 120° Beam angle, IP65, ***COOL WHITE (±6000K) BLACK FITTING**



OL-UFO-100W

SIZE:

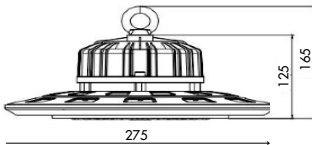

150W LED UFO HIGH BAY




150W LED (100lm per Watt), AC100-240VAC, 4KV Surge Protection Rating, 120° Beam angle, IP65, ***COOL WHITE (±6000K) BLACK FITTING**



OL-UFO-150W

SIZE:

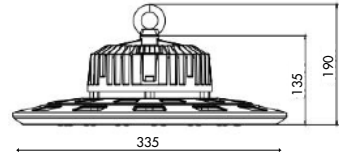

200W LED UFO HIGH BAY





200W LED (100lm per Watt), AC100-240VAC, 4KV Surge Protection Rating, 120° Beam angle, IP65, ***COOL WHITE (±6000K) BLACK FITTING**



OL-UFO-200W

SIZE:

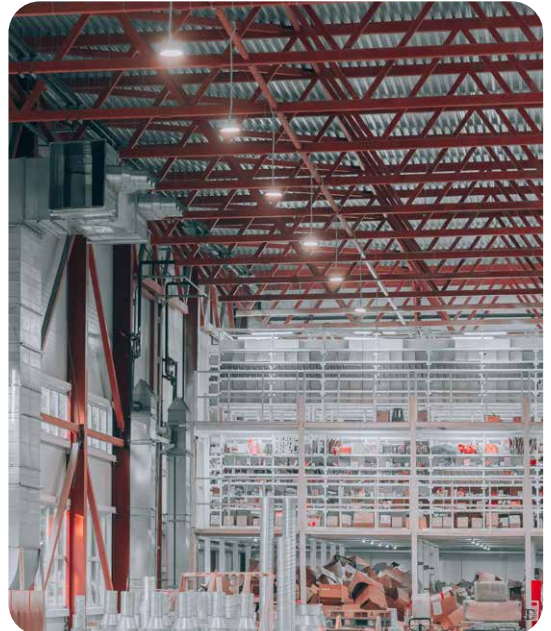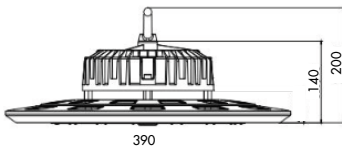



LED STREET LIGHTS & LED SOLAR STREET LIGHTS



NEW!

30W LED STREET LIGHT



30W LED (110lm per Watt),
AC85-265VAC,
4KV Surge Protection Rating,
70°*140° Beam angle, IP65,
3-4M INSTALLATION HEIGHT,
***COOL WHITE**
(±6000K) GREY FITTING

NSSL-30W-CW

Can be installed in gardens,
residential areas, courtyards,
roads & parking lots.

L:376xW:172xH:65mm

***POLE EXCLUDED**

NEW!

50W LED STREET LIGHT



50W LED (110lm per Watt),
AC85-265VAC,
4KV Surge Protection Rating,
70°*140° Beam angle, IP65,
5-6M INSTALLATION HEIGHT,
***COOL WHITE**
(±6000K) GREY FITTING

NSSL-50W-CW

Can be installed in gardens,
residential areas, courtyards,
roads & parking lots.

L:420xW:200xH:70mm

***POLE EXCLUDED**

NEW!

100W LED STREET LIGHT



100W LED (110lm per Watt),
AC85-265VAC,
4KV Surge Protection Rating,
70°*140° Beam angle, IP65,
7-8M INSTALLATION HEIGHT,
***COOL WHITE**
(±6000K) GREY FITTING

NSSL-100W-CW

Can be installed in gardens,
residential areas, courtyards,
roads & parking lots.

L:495xW:215xH:75mm

***POLE EXCLUDED**

NEW!

150W LED STREET LIGHT



150W LED (110lm per Watt),
AC85-265VAC,
4KV Surge Protection Rating,
70°*140° Beam angle, IP65,
9-10M INSTALLATION HEIGHT,
***COOL WHITE**
(±6000K) GREY FITTING

NSSL-150W-CW

Can be installed in gardens,
residential areas, courtyards,
roads & parking lots.

L:540xW:215xH:75mm

***POLE EXCLUDED**

NEW!

200W LED STREET LIGHT



200W LED (110lm per Watt),
AC85-265VAC,
4KV Surge Protection Rating,
70°*140° Beam angle, IP65,
11-12M INSTALLATION HEIGHT,
***COOL WHITE**
(±6000K) GREY FITTING

NSSL-200W-CW

Can be installed in gardens,
residential areas, courtyards,
roads & parking lots.

L:595xW:235xH:75mm

***POLE EXCLUDED**





L:395xW:210xH:50mm

30W INTEGRATED SOLAR LED STREET LIGHT



30W LED (110lm per Watt), 6Ah 3.2V Battery, Solar Panel 6W/5V, *10hours Charge Time, 12-16hours Discharge Time, PIR Sensor (6-8 Meters Detection Area), Work Temp -20°C to 45°C, 40 Square Meters Illumination Area, ABS Plastic + PC Lens, IP65, **3M INSTALLATION HEIGHT, *COOL WHITE (±6500K), ABS PLASTIC SUITABLE FOR WALL OR POLE INSTALLATION**

ELSL-30W-CW

This product is made up of integrated parts (solar panel, lithium battery, LED, MPPT controller)
Can be installed in gardens, residential areas, courtyards, roads & parking lots.

***POLE EXCLUDED**

10 HOUR CHARGE TIME IS BASED ON CLEAR & BRIGHT SUNNY DAY WITH CORRECT PANEL ORIENTATION TO THE SUN



L:480xW:220xH:50mm

60W INTEGRATED SOLAR LED STREET LIGHT



60W LED (110lm per Watt), 9Ah 3.2V Battery, Solar Panel 9W/5V, *10hours Charge Time, 12-16hours Discharge Time, PIR Sensor (6-8 Meters Detection Area), Work Temp -20°C to 45°C, 80 Square Meters Illumination Area, ABS Plastic + PC Lens, IP65, **4M INSTALLATION HEIGHT, *COOL WHITE (±6500K), ABS PLASTIC SUITABLE FOR WALL OR POLE INSTALLATION**

ELSL-60W-CW

This product is made up of integrated parts (solar panel, lithium battery, LED, MPPT controller)
Can be installed in gardens, residential areas, courtyards, roads & parking lots.

***POLE EXCLUDED**

10 HOUR CHARGE TIME IS BASED ON CLEAR & BRIGHT SUNNY DAY WITH CORRECT PANEL ORIENTATION TO THE SUN



L:620xW:230xH:55mm

90W INTEGRATED SOLAR LED STREET LIGHT



90W LED (110lm per Watt), 12Ah 3.2V Battery, Solar Panel 12W/5V, *10hours Charge Time, 12-16hours Discharge Time, PIR Sensor (6-8 Meters Detection Area), Work Temp -20°C to 45°C, 120 Square Meters Illumination Area, ABS Plastic + PC Lens, IP65, **4M INSTALLATION HEIGHT,** *COOL WHITE ($\pm 6500K$), ABS PLASTIC SUITABLE FOR WALL OR POLE INSTALLATION

ELSL-90W-CW

This product is made up of integrated parts (solar panel, lithium battery, LED, MPPT controller)
Can be installed in gardens, residential areas, courtyards, roads & parking lots.

***POLE EXCLUDED**

10 HOUR CHARGE TIME IS BASED ON CLEAR & BRIGHT SUNNY DAY WITH CORRECT PANEL ORIENTATION TO THE SUN



L:725xW:240xH:55mm

120W INTEGRATED SOLAR LED STREET LIGHT



120W LED (110lm per Watt), 12Ah 3.2V Battery, Solar Panel 20W/9V, *10hours Charge Time, 12-16hours Discharge Time, PIR Sensor (6-8 Meters Detection Area), Work Temp -20°C to 45°C, 160 Square Meters Illumination Area, ABS Plastic + PC Lens, IP65, **5M INSTALLATION HEIGHT,** *COOL WHITE ($\pm 6500K$), ABS PLASTIC SUITABLE FOR WALL OR POLE INSTALLATION

ELSL-120W-CW

This product is made up of integrated parts (solar panel, lithium battery, LED, MPPT controller)
Can be installed in gardens, residential areas, courtyards, roads & parking lots.

***POLE EXCLUDED**

10 HOUR CHARGE TIME IS BASED ON CLEAR & BRIGHT SUNNY DAY WITH CORRECT PANEL ORIENTATION TO THE SUN

30W, 60W, 90W & 120W SOLAR LED POLE

50 x 50mm White Pole For The 30W, 60W, 90W
& 120W Solar LED Street Light ***WHITE FINISH**
SUITABLE FOR WALL INSTALLATION



ELSL-PL

***To Be Used With The ELSL Solar lighting Only.**





L:520xW:260xH:80mm

100W SOLAR LED STREET LIGHT



100W LED (110lm per Watt), 18Ah 12V Battery, Solar Panel 25W/5V (430 x 350mm), *6-8hours Charge Time, 12-16hours Discharge Time, Intelligent Optical Control + Remote Control, Waterproof Cable, U Frame, Aluminium + PC Lens, IP65

**3-4M INSTALLATION HEIGHT WALL/POLE,
*COOL WHITE (±6500K)**

SUITABLE FOR WALL OR POLE INSTALLATION

E-SSL-100W-CW

Can be installed in gardens, residential areas, courtyards, roads & parking lots.

***POLE EXCLUDED**

6-8 HOUR CHARGE TIME IS BASED ON CLEAR & BRIGHT SUNNY DAY WITH CORRECT PANEL ORIENTATION TO THE SUN



L:520xW:260xH:80mm

200W SOLAR LED STREET LIGHT



200W LED (110lm per Watt), 30Ah 12V Battery, Solar Panel 35W/5V (580 x 350mm), *6-8 hours Charge Time, 12-16hours Discharge Time, Intelligent Optical Control + Remote Control, Waterproof Cable, U Frame, Aluminium + PC Lens, IP65

**4-5M INSTALLATION HEIGHT WALL/POLE,
*COOL WHITE (±6500K)**

SUITABLE FOR WALL OR POLE INSTALLATION

E-SSL-200W-CW

Can be installed in gardens, residential areas, courtyards, roads & parking lots.

***POLE EXCLUDED**

6-8 HOUR CHARGE TIME IS BASED ON CLEAR & BRIGHT SUNNY DAY WITH CORRECT PANEL ORIENTATION TO THE SUN



L:600xW:300xH:80mm

300W SOLAR LED STREET LIGHT



300W LED (110lm per Watt), 36Ah 12V Battery, Solar Panel 40W/5V (630 x 350mm), *6-8hours Charge Time, 12-16hours Discharge Time, Intelligent Optical Control + Remote Control, Waterproof Cable, U Frame, Aluminium + PC Lens, IP65

**4-5M INSTALLATION HEIGHT WALL/POLE,
*COOL WHITE ($\pm 6500K$)**

SUITABLE FOR WALL OR POLE INSTALLATION

E-SSL-300W-CW

Can be installed in gardens, residential areas, courtyards, roads & parking lots.

***POLE EXCLUDED**

6-8 HOUR CHARGE TIME IS BASED ON CLEAR & BRIGHT SUNNY DAY WITH CORRECT PANEL ORIENTATION TO THE SUN



L:600xW:300xH:80mm

400W SOLAR LED STREET LIGHT



400W LED (110lm per Watt), 48Ah 12V Battery, Solar Panel 50W/5V (670 x 445mm), *6-8hours Charge Time, 12-16hours Discharge Time, Intelligent Optical Control + Remote Control, Waterproof Cable, U Frame, Aluminium + PC Lens, IP65

**5-6M INSTALLATION HEIGHT WALL/POLE,
*COOL WHITE ($\pm 6500K$)**

SUITABLE FOR WALL OR POLE INSTALLATION


E-SSL-400W-CW

Can be installed in gardens, residential areas, courtyards, roads & parking lots.

***POLE EXCLUDED**

6-8 HOUR CHARGE TIME IS BASED ON CLEAR & BRIGHT SUNNY DAY WITH CORRECT PANEL ORIENTATION TO THE SUN

LIGHTING POLES

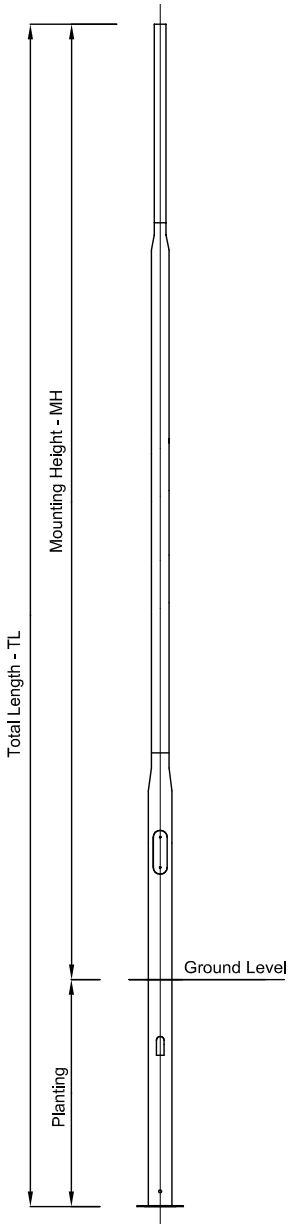

**Stepped (Parallel Tapered)
2 Reductions**

LED-SSL-8M

8M POLE MOUNTING HEIGHT 9.2M TOTAL
HOT DIP GALVANISED

LED-SSL-10M


10M POLE MOUNTING HEIGHT 11.5M TOTAL
HOT DIP GALVANISED

LED-SSL-12M

12M POLE MOUNTING HEIGHT 13.7M TOTAL
HOT DIP GALVANISED

CONFORMS TO SABS ISO 1461

***MADE TO ORDER**
Manufacturing Lead Time
Is 3 - 4 Weeks

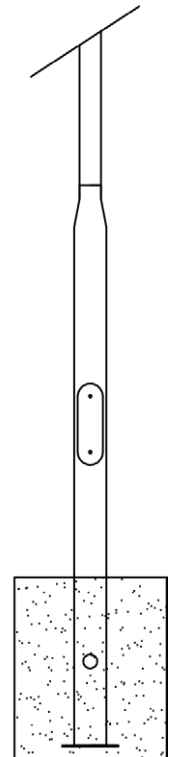

Planted

	Total Length - TL	Mounting Height - MH	Planting
Stepped (2 Reductions)	8.2m - 17.0m	7.0m - 15.0m	1.2m - 2.0m

SENSOR LIGHTS



LED MICRO SENSITIVE SENSOR LIGHT



Rated load: 10W(160PCS) LED, Rated Voltage 110-240VAC, Detection area 360° Detection area Adj: 1 - 8m, Sensor x 1, Installation height: 2 - 4m. HF system: 5.8GHz CW radar ISM Band. 75lm per Watt. **WHITE FITTING**



OL407ML

SENSOR LAMP HOLDER



Sensor Lamp holder - Rated Load: < 60W, Rated Voltage: 230VAC, Detection Angle : 360° Installation Height: 2 - 3,5m Detection area Adj: Max 6m, Sensor x 1



OL451

INFRARED SECURITY LIGHT



2 X PAR38 (Max 150W) Detection Area 180° Max 5m-12m, angle, IP20, 230VAC **BULBS NOT INCLUDED, BLACK FITTING**



OL65





INFRARED SECURITY LIGHT

PIR

2 X 10W LED (80 lm per Watt), Detection Area :
Max 9m, 180° angle, IP65, 230VAC, Installation
Height: 1,8 - 2,5m, Sensor x 1, ***COOL WHITE**
(±6000K) **WHITE FITTING**

OL65-W



INFRARED SECURITY LIGHT

PIR

2 X 10W LED (80 lm per Watt), Detection Area :
Max 9m, 180° angle, IP65, 230VAC, Installation
Height: 1,8 - 2,5m, Sensor x 1, ***COOL WHITE**
(±6000K) **BLACK FITTING**

OL65-B



OCCUPANCY SENSORS



MICROWAVE SENSOR

Micro
wave

220VAC-240VAC; 50Hz
Ambient Light: <3-2000 LUX (Adjustable)
Time Delay: Min 10s ± 3s; Max 12min ± 1min
Detection Range: 360°; 1-8m radius (Adjustable)
Installation height: 2-6m; Detection motion speed: 0.6-1.5m/s; IP20



OL700C

INFRARED SENSOR

PIR

220VAC-240VAC; 50Hz
Ambient Light: <3-2000 LUX (Adjustable)
Time Delay: Min 10s ± 3s; Max 15min ± 2min
Detection Range: 360°; 6m radius
Installation height: 2.2 - 4m
Detection motion speed: 0.6-1.5m/s; IP20



OL05C

SMOKE DETECTOR & ALARM

Smoke detector and Alarm
IP20 9V/DC; Sound >85 db (3m);
Battery Operated - Battery supplied with unit



OL84

INFRARED MOTION SENSOR

PIR

220VAC-240VAC, 50Hz
Ambient Light: <3-2000 LUX (Adjustable)
Time Delay: Min 10s ± 3s Max 15min ± 2min
Detection Range: 180° & 12m max
Installation height: 1.8 - 2.5m
Detection motion speed: 0.6-1.5m/s, IP65



OL15

ROOM OCCUPANCY SENSOR - 1 SENSOR

Room occupancy sensor - Rated Load: 1200W (incandescent) 300W (CFL) Rated Voltage 230VAC, Detection angle 360°, Installation Height: 2.2 - 4m, detection area Adj: 3 -6m, Sensor: x 1PIR



OL06A

PIR

ROOM OCCUPANCY SENSOR - 3 SENSORS

Room occupancy sensor - Rated Load: 1200W (incandescent) 300W (CFL) Rated Voltage 230VAC, Detection angle 360°, Installation Height: 2.2 - 4m, detection area Adj: 3 -12m, Sensor: x 3 PIR



OL06B

PIR

ROOM OCCUPANCY SENSOR

Room occupancy sensor - Rated Load: 1200W (incandescent) 300W (CFL) Rated Voltage 230VAC, Detection angle 360° Installation Height: 2.2 - 4m, detection area Adj: Max 6m, Sensor x 1 PIR



OL41 Cut Out Size : 62mm

ROOM OCCUPANCY SENSOR

Room occupancy Micro sensitive sensor - Rated Load: 1200W (incandescent) 300W (CFL) Rated Voltage 220-240VAC, Detection angle 360°, Installation Height: 1.5 - 3.5m, Time delay: 10s ± 3s to 12min ± 1 min, Detection area Adj: 1 - 8m, Sensor x 1



OL357 Cut Out Size : 62mm

ROOM/CUPBOARD OCCUPANCY SENSOR

Occupancy sensor - Rated Load: 800W (incandescent) 200W (CFL) Rated Voltage 230VAC, Detection angle 100° x 360°, Time delay: 5s, 30s, 1, 3, 5, 8 min, Detection area Adj: Max 6m, Sensor x 1 PIR



OL24

MICRO SENSITIVE SENSOR UNIT

Micro sensitive Sensor unit only - Rated load 1200W (incandescent) 300W (CFL), Rated Voltage: 230VAC, Detection angle 360° Detection area Adj: 2 - 16m, Sensor x 1, Installation height: 1,8-4m. HF system: 5.8GHz CW radar ISM Band; Transmission Power: < 10mW. Can be retro fitted with existing fittings



OL701EMS

Please note:

A PIR sensor detects heat changes. Heat sources include people, animals, air conditioning wind current and incandescent lamps. A passive infrared sensor detects heat only within its line of sight. At a short distance (within 3 m) the sensor can detect small motions such as hand movements. At 10-15 m the sensor will detect movement such as a person walking around.

Microwave sensors use ultra-high frequency radio waves (also known as microwaves) and the principle of the Doppler Effect to detect motion. The sensor sends out radio waves that bounce off nearby surfaces and return to the sensor. They can also be installed behind luminaries, plastic, or glass lenses or in a watertight non-metallic box or watertight luminaire for wet location application.

DC DAY-NIGHT SWITCH

12-24VDC, 10A Photocell Bracket Mount (Yellow Base), Rated Voltage 12-24VDC, Rated Current: 10A, Ambient: < 5 - 15LUX, Photocell sensor x 1 with threaded PG13.5 Gland entry at bottom - Cable Gland included, Suitable for Solar & Direct Current Lighting (12-24VDC) applications
SUPPLIED WITH GLAND



PCS10-AD

PLEASE NOTE: THIS PRODUCT IS POLARITY SENSITIVE. DO NOT REVERSE CONNECT + / -

10A DAY-NIGHT SWITCH

10A Photocell Bracket Mount (white Base), Rated Voltage 230VAC Rated Current: 10A, Ambient: < 5 - 15LUX, Photocell sensor x 1 with threaded PG13.5 Gland entry at bottom. **SUPPLIED WITH GLAND**



PCS10

25A DAY-NIGHT SWITCH

25A Photocell Bracket Mount (green Base), Rated Voltage 230VAC Rated Current: 25A, Ambient: < 5 - 15LUX, Photocell sensor x 1 with threaded PG13.5 Gland entry at bottom. **SUPPLIED WITH GLAND**



PCS25

DIN RAIL DAY-NIGHT SENSOR

Energy saving Light-control Sensor (Photocell) that will save you money. It senses the natural ambient light and will turn lights ON or OFF as the conditions change (day time/night time). Ambient Light: 2-100 Lux (adj).
 DIN RAIL MOUNT



OL25D

NE20 DAY-NIGHT SENSOR (PLUG-IN TYPE)

This product will turn the light on or off automatically according to the ambient light setting. It can be used for street lights, garden lights, etc. during the evening hours. 20A
BASE SOLD SEPARATELY.



NE20




NE20-B



5W-100W TRAILING EDGE DIMMER

Rated load: 5W-100W, Rated Voltage 220-230VAC
frequency: 50Hz, Dimming Mode: Trailing Edge,
Control Mode: 1 Way, IP20, **FOR LED LAMPS**

*DIMS A MAXIMUM OF 10PCS OF THE O-LITE LED GU10's

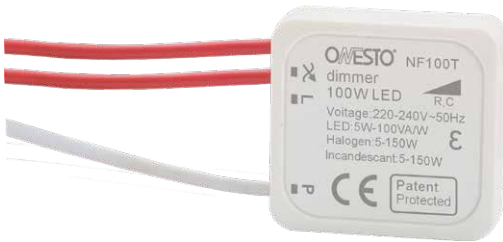


NF100T

5W-150W TRAILING EDGE DIMMER

Rated load: 5W-150W, Rated Voltage 220-230VAC
frequency: 50Hz, Dimming Mode: Trailing Edge,
Control Mode: 1 Way, IP20, **FOR LED LAMPS**

*DIMS A MAXIMUM OF 20PCS OF THE O-LITE LED GU10's

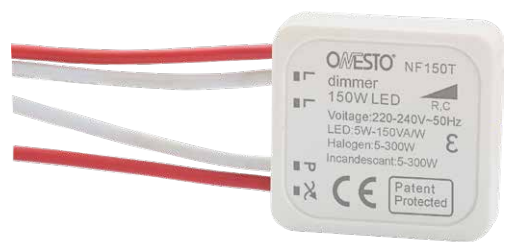


NF150T

***ALL QUANTITIES OF GU10'S ARE WORKED OUT USING THE O-LITE GU10 - DIMMABLE QUANTITIES MAY VARY ON OTHER BRANDS**

5W-250W TRAILING EDGE DIMMER

Rated load: 5W-250W, Rated Voltage 220-230VAC
frequency: 50Hz, Dimming Mode: Trailing Edge,
Control Mode: 1 Way, IP20, **FOR LED LAMPS**

*DIMS A MAXIMUM OF 35PCS OF THE O-LITE LED GU10's

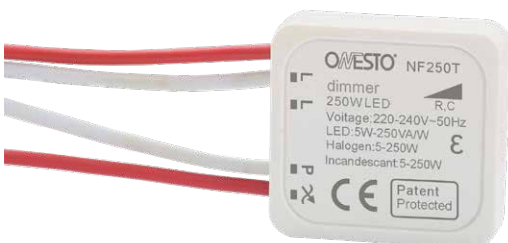

NF250T

5W-250W DIMMER + MIN-MAX DIMMING LEVEL + DIMMING SPEED + POWER & LIGHT MEMORY

Rated load: 5W-250W, Rated Voltage 220-230VAC
frequency: 50Hz, Dimming Mode: Trailing Edge,
Control Mode: Multi Way, Min Brightness Level:
Adjustable, IP20, **FOR LED LAMPS**


*DIMS A MAXIMUM OF 35PCS OF THE O-LITE LED GU10's



NF250T2

TO BE USED IN CONJUNCTION WITH THE GU10DIM-6W-CW & GU10DIM-6W-WW RANGE ON PAGE : 33

DIMMER REGULATORS FOR CYCLOPS RANGE & 6W DIMMABLE GU10

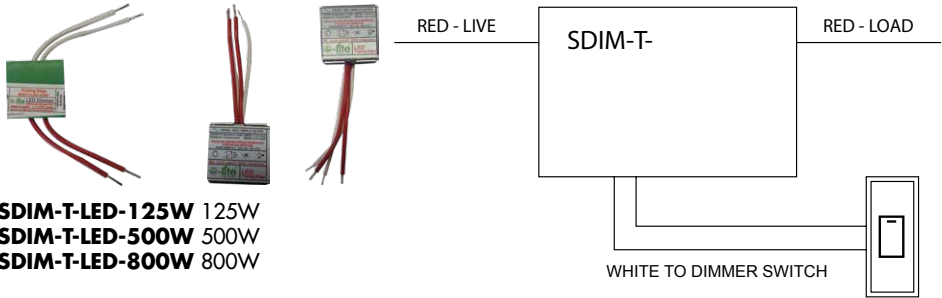

SDIM-T-LED-125W 125W
SDIM-T-LED-500W 500W
SDIM-T-LED-800W 800W

DOWN LIGHT	DIMMABLE DRIVER	MAX NO OF LIGHTS PER REGULATOR		
		SDIM - T - LED - *****		
		125W	500W	800W
LEDGU10-6WD	INTERNAL	1 - 3	1 - 10	1 - 18
OL - CY03	OL - 3DD (MINI D26004NT)	1 - 19	1 - 71	1 - 126
OL - CY06	OL - 6DD (D26009NT)	1 - 10	1 - 37	1 - 66
OL - CY12	OL - 12DD (D26012NT)	1 - 9	1 - 34	1 - 60
OL - CY18	OL - 18DD (D26020NT)	1 - 5	1 - 20	1 - 35

DC DIMMER

SDIM-LED-96W-DC 96W DC DIMMER
For use with: OL-6020 & OL-6065
Strip Lights
SDIM-LED-96W-DC



VOLTAGE STABILISER




VS Voltage Stabiliser for LED

CAPACITOR



CAPACITOR



PLEASE NOTE: THIS CAPACITOR MUST BE FITTED IN ORDER TO VALIDATE WARRANTY



**SPARE NON-DIMMABLE
PLUG & PLAY DRIVERS**

- OL-PP03-D** 3W SPARE DRIVER WITH PLUG & PLAY CONNECTOR
- OL-PP06-D** 6W SPARE DRIVER WITH PLUG & PLAY CONNECTOR
- OL-PP12-D** 12W SPARE DRIVER WITH PLUG & PLAY CONNECTOR
- OL-PP18-D** 18W SPARE DRIVER WITH PLUG & PLAY CONNECTOR
- OL-PP24-D** 24W SPARE DRIVER WITH PLUG & PLAY CONNECTOR



**SPARE DIMMABLE
DRIVERS**

- OL-3DD** 3W SPARE DRIVER
- OL-6DD** 6W SPARE DRIVER
- OL-12DD** 12W SPARE DRIVER
- OL-18DD** 18W SPARE DRIVER





VIRI BRIGHT DIMMER

73678

200W LED DIMMER

4 X 2

SPARE DRIVERS FOR AIR PANEL & DOWNLIGHTS ON PAGE 57 & 59



AIR-SD-6-10W SPARE DRIVER FOR 6W & 10W AIR PANEL & DOWNLIGHT

AIR-SD-15W SPARE DRIVER FOR 15W AIR PANEL & DOWNLIGHT

AIR-SD-20-24W SPARE DRIVER FOR 20W & 24W AIR PANEL & DOWNLIGHT

SPARE DRIVERS FOR PANEL LIGHTS ON PAGE 73



EBL-LED300-D SPARE DRIVER FOR LED300CW

EBL-LED600-D SPARE DRIVER FOR LED600CW

EBL-LED1.2-D SPARE DRIVER FOR LED1.2CW **(2 DRIVERS REQUIRED FOR LED1.2CW)**

ONESTO[®]

MATRIX[®]

WIRING SYSTEMS



BLACK GLASS WHITE GLASS
WOOD TITANIUM BLACK WHITE
STONE RANGE

*Combining
Elegance
With
Effortless Switching*

Stylish White Glass, Black Glass & Wooden Surrounds now available for the distinguished Matrix Range. The modular design allows for various different combinations. White, Titanium & Black Modules & Surrounds available. Clusters available in White, Black, Titanium, White Glass, Black Glass, Stone & Wooden finishes. Also included is our newly developed Stone Range with magnificent natural finishes.

Switch Modules are available in 3 different sizes : small, medium and large

Choose your switches & sockets in-line with the design of your interior finishes.

MATRIX RANGE - ROCKER SWITCH

MXS-2011W
4 x 2 16A 1 LEVER 1 WAY WIDE ROCKER
LARGE SWITCH

MXS-2012W
4 x 2 16A 1 LEVER 2 WAY WIDE ROCKER
LARGE SWITCH

MXS-2021B
4 x 2 16A 2 LEVER 1 WAY
WIDE ROCKER **MEDIUM SWITCH**

L

M

MATRIX RANGE - 1 LEVER SWITCH

MXS-2011
4 x 2 16A 1 LEVER 1 WAY
SMALL SWITCH

MXS-2012
4 x 2 16A 1 LEVER 2 WAY
SMALL SWITCH

S

MATRIX RANGE - 2 LEVER SWITCH

MXS-2021
4 x 2 16A 2 LEVER 1 WAY **SMALL SWITCH**

S

MATRIX RANGE - BELL SWITCH

MXS-201B
4 x 2 16A BELL PRESS **SMALL SWITCH**

S

MATRIX RANGE - 3 LEVER SWITCH

MXS-2031
4 x 2 16A 3 LEVER 1 WAY **SMALL SWITCH**

S

MATRIX RANGE 20A SWITCH

MXI-2220
4 x 2 20A 1 LEVER DP **SMALL SWITCH**

S

MATRIX RANGE - ISOLATOR

MXI-2230
4 x 2 30 AMP 2 POLE ISOLATOR

MXI-2330
4 x 2 30 AMP 3 POLE ISOLATOR

MXI-2245
4 x 2 45 AMP 2 POLE ISOLATOR

MXI-2345
4 x 2 45 AMP 3 POLE ISOLATOR


L

MATRIX RANGE 16A INTERMEDIATE SWITCH

MXS-2011
4 x 2 16A 1 LEVER INTERMEDIATE
SMALL SWITCH

S


MATRIX RANGE - SOCKET



MXP-2001UN
4 x 2
16A SINGLE UNSWITCHED SOCKET
OUTLET

S S


MATRIX RANGE - SOCKET



MXP-2001V
4 x 2 16A SINGLE SWITCHED SOCKET
OUTLET VERTICAL

L


MATRIX RANGE - SOCKET



MXP-2001H
4 x 2 16A SINGLE SWITCHED
SOCKET OUTLET HORIZONTAL


L

MATRIX RANGE - SWITCHED SOCKET




MXP-2011
4 x 2 16A SLIMLINE SOCKET (NEW ZA PLUG
SOCKET) + 1 WAY SWITCH

S




MXP-2012
4 x 2 16A SLIMLINE SOCKET (NEW ZA PLUG
SOCKET) + 2 WAY SWITCH

MATRIX RANGE - UNSWITCHED SOCKET




MXP-2001E
4 x 2 1 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET)

S



MXP-2002E
4 x 2 2 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET)



MXP-2003E
4 x 2 3 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET)
MONOBLOCK


MATRIX RANGE - SHAVER SOCKET



MXP-5201
4 x 2 SHAVER SOCKET

L


MATRIX RANGE - UNSWITCHED SOCKET



MXP-2001EUU
4 x 2 1 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET) 16A SINGLE
UNSWITCHED SOCKET OUTLET
VERTICAL **MONOBLOCK**


L

MATRIX RANGE - DEDICATED SOCKETS




MXPD-2001
4 x 2 16A SINGLE SWITCHED
SOCKET OUTLET HORIZONTAL
DEDICATED-RED

L



MXPD-4001V
4 x 4 16A SINGLE SWITCHED
SOCKET OUTLET VERTICAL
DEDICATED-RED

L




MXPD-4002
4 x 4 16A DOUBLE SWITCHED
SOCKET OUTLET DEDICATED-RED
MONOBLOCK


L

PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.


MATRIX RANGE - 4 x 4 ROCKER SWITCHES




MXS-4011W
4 x 4 16A 1 LEVER 1 WAY WIDE
ROCKER **LARGE SWITCH**



MXS-4021W
4 x 4 16A 2 LEVER 1 WAY WIDE
ROCKER **2x LARGE SWITCH**



MXS-4031W
4 x 4 16A 3 LEVER 1 WAY WIDE
ROCKER SWITCH
1 LARGE SWITCH, 2 MEDIUM SWITCHES




MXS-4041
4 x 4 16A 4 LEVER 1 WAY
4x MEDIUM SWITCH



MATRIX RANGE - 4 x 4 SWITCHES



MXS-4051
4 x 4 16A 5 LEVER 1 WAY
SWITCH
2 MEDIUM SWITCHES, 3 SMALL SWITCHES



MXS-4061
4 x 4 16A 6 LEVER 1 WAY
6x SMALL SWITCH




MXI-4245
4 x 4 45 AMP 2 POLE ISOLATOR



MXI-4345
4 x 4 45 AMP 3 POLE ISOLATOR

MXI-4260
4 x 4 60 AMP 2 POLE ISOLATOR


MXI-4360
4 x 4 60 AMP 3 POLE ISOLATOR




MXS-401BW
4 x 4
16A 1 LEVER BELL PRESS **LARGE SWITCH**




MATRIX RANGE - 4 x 4 SOCKETS



MXP-4001V
4 x 4
16A SINGLE
SWITCHED
SOCKET OUTLET
VERTICAL




MXP-4001H
4 x 4
16A SINGLE
SWITCHED
SOCKET OUTLET
HORIZONTAL




MXP-4002
4 x 4
16A DOUBLE
SWITCHED
SOCKET OUTLET
MONOBLOCK

NEW!


MATRIX RANGE - 4 x 4 UNSWITCHED SOCKETS - QUICK CONNECTION




MXP-4001Euu
4 x 4 1 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET) 16A
SINGLE UNSWITCHED SOCKET
OUTLET VERTICAL
MONOBLOCK



MXP-4002Euu
4x4 2 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET) 2 x 16A
SINGLE UNSWITCHED SOCKET
OUTLET VERTICAL
MONOBLOCK



MXP-4003E
4 x 4 3 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET)
MONOBLOCK



MXP-4006E
4 x 4 6 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET)
MONOBLOCK




MXP-4005Euu
4 x 4 4 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET) 16A SINGLE
UNSWITCHED SOCKET OUTLET VERTICAL
MONOBLOCK



MONOBLOCK
QUICK & EASY
CONNECTION

PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.



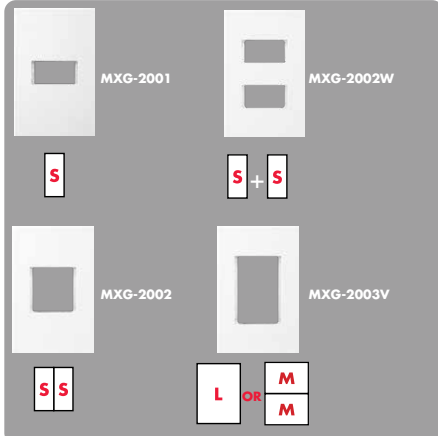


MATRIX RANGE - 4 X 2 YOKES - VERTICAL

MXG-2001 4 x 2 1 LEVER YOKE ONLY


MXG-2002W 4 x 2 2 LEVER WIDE (1+1) YOKE ONLY

MXG-2002 4 x 2 2 LEVER YOKE ONLY

MXG-2003V 4 x 2 3 LEVER YOKE ONLY




Galvanised Metal back

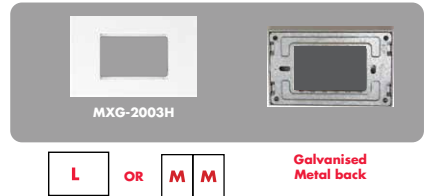


MATRIX RANGE - 4 X 2 YOKES - HORIZONTAL

MXG-2003H 4 x 2 3 LEVER YOKE ONLY




Galvanised Metal back




MATRIX RANGE - 4 X 4 YOKES - VERTICAL

MXG-4001WV 4 x 4 1 LEVER YOKE ONLY

MXG-4002W 4 x 4 1 + 1 LEVER YOKE ONLY




Galvanised Metal back

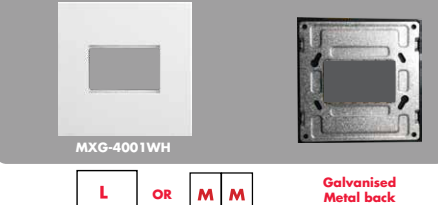


MATRIX RANGE - 4 X 4 YOKES - HORIZONTAL

MXG-4001WH 4 x 4 1 LEVER YOKE ONLY



Galvanised Metal back

MATRIX RANGE - BLANK COVERS

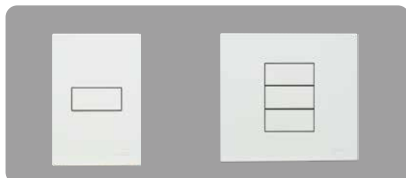

MXB-2001 4 x 2 BLANK COVERS

MXB-4001 4 x 4 BLANK COVERS

MATRIX RANGE - SOCKET MODULE



MXM-P001EU
1.6A SLIMLINE SOCKET (NEW ZA PLUG SOCKET) SOCKET **SMALL** MODULE

S

MATRIX RANGE - SOCKET MODULE



MXM-P001H
1.6A SINGLE SWITCHED SOCKET OUTLET HORIZONTAL **LARGE** MODULE

L

MATRIX RANGE - SOCKET MODULE



MXM-P001V
1.6A SINGLE SWITCHED SOCKET OUTLET VERTICAL **LARGE** MODULE

L

MATRIX RANGE - SOCKET MODULE



MXM-P001EUU
1.6A SLIMLINE SOCKET (NEW ZA PLUG SOCKET) & 1.6A SINGLE UNSWITCHED SOCKET OUTLET VERTICAL **LARGE** MODULE - **MONOBLOCK**

L

MATRIX RANGE - SOCKET MODULE



MXM-PD001U
1.6A SINGLE UNSWITCHED SOCKET **SS** MODULE DEDICATED-RED

S S

MATRIX RANGE - SOCKET MODULE



MXM-PD001U-BL
1.6A SINGLE UNSWITCHED SOCKET **SS** MODULE DEDICATED-BLUE

S S

MATRIX RANGE - SOCKET MODULE



MXM-PD001U-BK
1.6A SINGLE UNSWITCHED SOCKET **SS** MODULE DEDICATED-BLACK

S S

MATRIX RANGE - SOCKET MODULE



MXM-MFS
1.6A MULTI-FUNCTION UNSWITCHED SOCKET **SS** MODULE

S S

MATRIX RANGE - SOCKET MODULE



MXM-P001U
1.6A SINGLE UNSWITCHED SOCKET **SS** MODULE

S S

MATRIX RANGE - SOCKET MODULE



MXM-S001RSA
1.6A SINGLE UNSWITCHED SOCKET **SS** MODULE (SCHUKO RSA SPECIFICATION)

S S

MXM-S001S

1.6A SINGLE UNSWITCHED SOCKET **SS** MODULE **FOR EXPORT ONLY** (SCHUKO INTERNATIONAL SPECIFICATION)



MATRIX RANGE - USB MODULE



MXM-C001
18W USB TYPE-C WITH QUICK CHARGE & 5V 3A USB 3.0 SWITCHED **SS** MODULE

S S

MATRIX RANGE - SOCKET MODULE



MXM-PD001
1.6A SINGLE SWITCHED SOCKET OUTLET HORIZONTAL **LARGE** MODULE DEDICATED-RED

L

MATRIX RANGE - SOCKET MODULE



MXM-P003EU
3 x 1.6A NEW ZA PLUG SOCKETS **LARGE** MODULE **MONOBLOCK**

L

NEW ZA PLUG TOP



3PZA
1.6A 3PIN RE-WIRABLE NEW ZA PLUG TOP

MATRIX RANGE - SOCKET MODULE



MXM-1402-2001
1.3A BRITISH STANDARD SWITCHED SOCKET HORIZONTAL **LARGE** MODULE FOR EXPORT ONLY

L

PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.

MATRIX RANGE - SATELLITE MODULE



MXM-001SAT
SATELLITE **SMALL** MODULE



MATRIX RANGE - DATA MODULE



MXM-001DAT
DATA **SMALL** MODULE RJ45



MATRIX RANGE - USB MODULE



MXM-P001USB
5V 2A USB SOCKET **SMALL** MODULE



MATRIX RANGE - HDMI MODULE



MXM-HDMI
HIGH DEFINITION MULTIMEDIA
INTERFACE
SOCKET **SMALL** MODULE



MATRIX RANGE - TV MODULE



MXM-001TV
TELEVISION **SMALL** MODULE
MXM-001ITV
ISOLATED TELEVISION **SMALL** MODULE



MATRIX RANGE - TELEPHONE MODULE



MXM-001TEL
TELEPHONE **SMALL** MODULE RJ11



MATRIX RANGE - AUDIO MODULE



MXM-AUDR
AUDIO MODULE POSITIVE RED
SMALL MODULE




MATRIX RANGE - AUDIO MODULE



MXM-AUDB
AUDIO MODULE NEGATIVE BLACK
SMALL MODULE



PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.

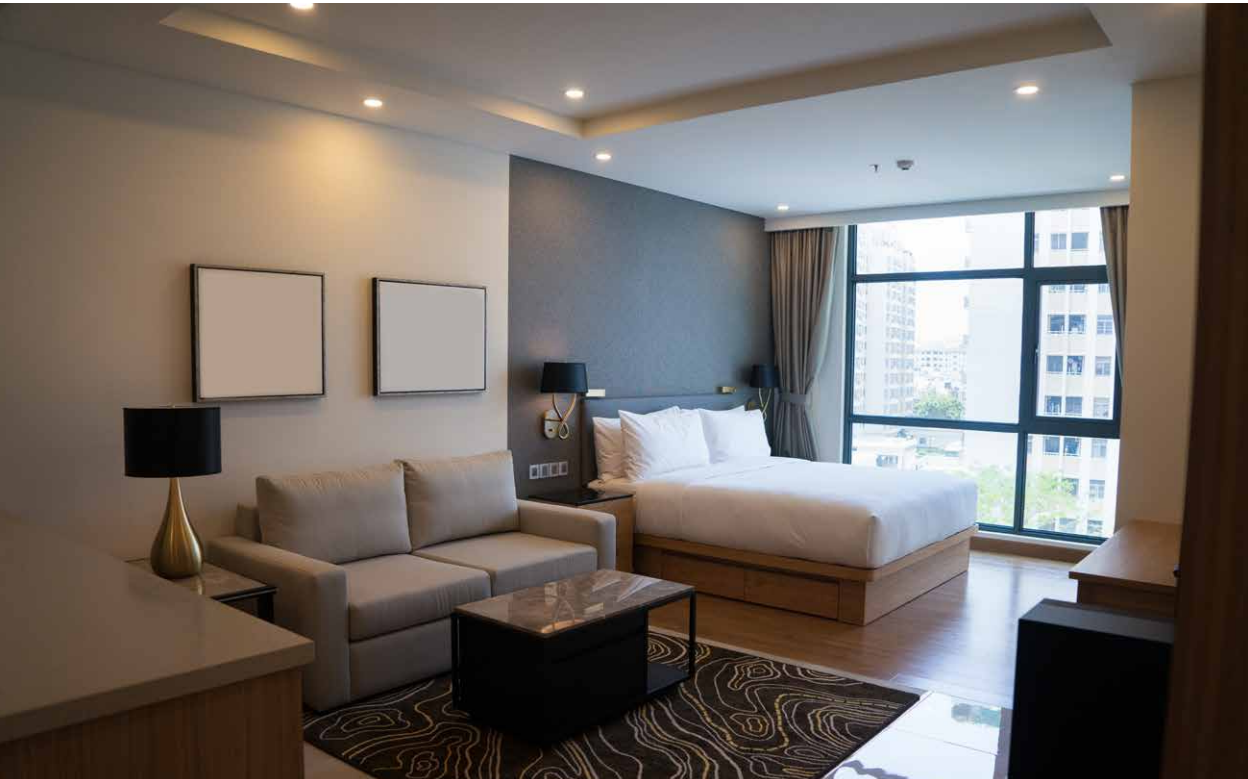



MATRIX RANGE - SWITCH MODULE

MXM-S001

16A 1 WAY SWITCH **SMALL** MODULE S

MXM-S002

16A 2 WAY SWITCH **SMALL** MODULE



MATRIX RANGE - SWITCH MODULE

MXM-SR01W

16A 1 WAY WIDE ROCKER SWITCH **LARGE** MODULE L

MXM-SR02W

16A 2 WAY WIDE ROCKER SWITCH **LARGE** MODULE



MATRIX RANGE - DIMMER MODULE

MXM-S001D

16A DIM-ON-OFF **SMALL** MODULE S

NEW!



MATRIX RANGE - ROTARY DIMMER MODULE

MXM-150D

5W-100W, 220-240VAC, 2 WAY TRAILING EDGE DIMMER **SMALL** MODULE S

MXM-250D

5W-250W, 220-240VAC, 2 WAY TRAILING EDGE DIMMER **SMALL** MODULE



MATRIX RANGE - SWITCH MODULE

MXM-S001I

16A INTERMEDIATE SWITCH **SMALL** MODULE S



MATRIX RANGE - INDICATION MODULE

MXM-IND

INDICATION **SMALL** MODULE S

NEW!



MATRIX RANGE - PROTECTIVE COVER

MXPC-2001

PROTECTIVE COVER 4 X 2 S

MXPC-4002

PROTECTIVE COVER 4 X 4




MATRIX RANGE - SWITCH MODULE

MXM-S021B

16A 1 WAY BIGGER ROCKER SWITCH **MEDIUM** MODULE M

MXM-S022B

16A 2 WAY BIGGER ROCKER SWITCH **MEDIUM** MODULE



MATRIX RANGE - BELL MODULE

MXM-S001B

16A BELL PRESS SWITCH **SMALL** MODULE S



MATRIX RANGE - CORD MODULE

MXM-001CG

CORD GRIP **SMALL** MODULE S



MATRIX RANGE - BELL MODULE

MXM-S001BW

16A WIDE ROCKER BELL PRESS SWITCH **LARGE** MODULE L



MATRIX RANGE - SWITCH MODULE

MXM-I021

20A DP SWITCH **SMALL** MODULE S



MATRIX RANGE - SWITCH MODULE

MXM-SS001

16A 1 LEVER 1 WAY SPLIT SWITCH S

MXM-SS002

16A 1 LEVER 2 WAY SPLIT SWITCH



MATRIX RANGE - BLANK MODULE

MXM-001BNK

BLANKING COMPONENT **SMALL** MODULE S



MATRIX RANGE - BLANK MODULE

MXM-003BNK

BLANKING COMPONENT **LARGE** MODULE L

PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.



MATRIX RANGE - ISOLATOR MODULE

MXM-I0230

30A 2 POLE ISOLATOR MODULE

MXM-I0330

30A 3 POLE ISOLATOR MODULE

MXM-I0245

45A 2 POLE ISOLATOR MODULE

MXM-I0345

45A 3 POLE ISOLATOR MODULE

MXM-I0260

60A 2 POLE ISOLATOR MODULE

MXM-I0360

60A 3 POLE ISOLATOR MODULE L



IDEAL FOR ANY WORK -SPACE OR OFFICE, HOME OR RESTAURANT. (SEE ABOVE RESTAURANT)

THE ONLY LIMIT IS YOUR IMAGINATION.



OR



CLUSTERS CAN BE POSITIONED HORIZONTALLY OR VERTICALLY. CLUSTERS CAN ALSO BE USED AS 8 WAY SWITCHES.

CAN BE PLACED IN INCONSPICUOUS PLACES OR IN FULL VIEW.

WHITE CLUSTER 8 WAY - GALVANISED STEEL WALL BOX COMPLETE WITH SEPARATION COMPARTMENTS



MXC-1008
8 WAY CLUSTER YOKE - WHITE

*SPARE BLACK, TITANIUM AND WHITE BEZELS AVAILABLE ON REQUEST

TITANIUM CLUSTER 8 WAY - GALVANISED STEEL WALL BOX COMPLETE WITH SEPARATION COMPARTMENTS



T-MXC-1008
8 WAY CLUSTER YOKE - TITANIUM

*SPARE BLACK, TITANIUM AND WHITE BEZELS AVAILABLE ON REQUEST

BLACK CLUSTER 8 WAY - GALVANISED STEEL WALL BOX COMPLETE WITH SEPARATION COMPARTMENTS



BK-MXC-1008
8 WAY CLUSTER YOKE - BLACK

*SPARE BLACK, TITANIUM AND WHITE BEZELS AVAILABLE ON REQUEST

BLACK GLASS CLUSTER 8 WAY - GALVANISED STEEL WALL BOX COMPLETE WITH SEPARATION COMPARTMENTS



BGB-MXC-1008
8 LEVER BLACK GLASS & BLACK BEZEL CLUSTER + BOX



BGT-MXC-1008
8 LEVER BLACK GLASS & TITANIUM BEZEL CLUSTER + BOX



BGW-MXC-1008
8 LEVER BLACK GLASS & WHITE BEZEL CLUSTER + BOX

WHITE GLASS CLUSTER 8 WAY - GALVANISED STEEL WALL BOX COMPLETE WITH SEPARATION COMPARTMENTS



WGB-MXC-1008
8 LEVER WHITE GLASS & BLACK BEZEL CLUSTER + BOX



WGT-MXC-1008
8 LEVER WHITE GLASS & TITANIUM BEZEL CLUSTER + BOX



WGW-MXC-1008
8 LEVER WHITE GLASS & WHITE BEZEL CLUSTER + BOX


WOODEN CLUSTER 8 WAY - GALVANISED STEEL WALL BOX COMPLETE WITH SEPARATION COMPARTMENTS



WB-MXC-1008
8 LEVER WOOD & BLACK BEZEL CLUSTER + BOX



WT-MXC-1008
8 LEVER WOOD & TITANIUM BEZEL CLUSTER + BOX



WWH-MXC-1008
8 LEVER WOOD & WHITE BEZEL CLUSTER + BOX

SELECT MODULES TO SUIT REFER TO PAGE 128-130, 135-137, 140-142.




*SPARE BLACK, TITANIUM AND WHITE BEZELS AVAILABLE ON REQUEST



EXAMPLE: 8 WAY CLUSTER FITTED WITH

- 1x Telephone Module **S**
- 1x New RSA Socket **S**
- 1x USB Module **S**

- 1x Unswitched Socket **SS**
- 1x Switched Socket **L**



MATRIX RANGE - 4 X 2 YOKES - VERTICAL



T-MXG-2001



T-MXG-2002W



T-MXG-2002



T-MXG-2003V



T-MXG-2001 4 x 2 1 LEVER YOKE ONLY

T-MXG-2002W 4 x 2 2 LEVER WIDE (1+1) YOKE ONLY

T-MXG-2002 4 x 2 2 LEVER YOKE ONLY

T-MXG-2003V 4 x 2 3 LEVER YOKE ONLY



Galvanised Metal back

MATRIX RANGE - 4 X 2 YOKES - HORIZONTAL



T-MXG-2003H



Galvanised Metal back

T-MXG-2003H 4 x 2 3 LEVER YOKE ONLY

MATRIX RANGE - 4 X 4 YOKES - VERTICAL



T-MXG-4001WV



T-MXG-4002W



Galvanised Metal back

T-MXG-4001WV 4 x 4
1 LEVER YOKE ONLY


T-MXG-4002W 4 x 4
1 + 1 LEVER YOKE ONLY



MATRIX RANGE - 4 X 4 YOKES - HORIZONTAL



T-MXG-4001WH



Galvanised Metal back

T-MXG-4001WH 4 x 4 1 LEVER YOKE ONLY

MATRIX RANGE - BLANK COVERS



T-MXB-2001 4 x 2 BLANK COVERS



T-MXB-4001 4 x 4 BLANK COVERS

TITANIUM - SOCKET



T-MXP-2001V
4 x 2 16A SINGLE SWITCHED SOCKET
OUTLET VERTICAL

L

TITANIUM - SOCKET



T-MXP-2001H
4 x 2 16A SINGLE SWITCHED
SOCKET OUTLET HORIZONTAL

L

NEW!

TITANIUM - SOCKET



T-MXP-2001V
4 x 2 16A SINGLE SWITCHED SOCKET
OUTLET VERTICAL
MONOBLOCK

L

NEW!

TITANIUM - SOCKET



T-MXP-2001EUU
4 x 2 1 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET) 16A SINGLE
UNSWITCHED SOCKET OUTLET
VERTICAL
MONOBLOCK

L

TITANIUM- 4 x 4 SOCKETS



T-MXP-4001V
4 x 4
16A SINGLE
SWITCHED SOCKET
OUTLET VERTICAL



T-MXP-4001H
4 x 4
16A SINGLE
SWITCHED
SOCKET OUTLET
HORIZONTAL



T-MXP-4002
4 x 4
16A DOUBLE
SWITCHED SOCKET
OUTLET
MONOBLOCK

NEW!

MATRIX RANGE - 4 x 4 UNSWITCHED SOCKETS - QUICK CONNECTION



T-MXP-4001EUU
4 x 4 1 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET) 16A
SINGLE UNSWITCHED SOCKET
OUTLET VERTICAL
MONOBLOCK

L



T-MXP-4002EUU
4x4 2 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET) 2 x 16A
SINGLE UNSWITCHED SOCKET
OUTLET VERTICAL
MONOBLOCK

L



T-MXP-4003E
4 x 4 3 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET)
MONOBLOCK

L



T-MXP-4006E
4 x 4 6 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET)
MONOBLOCK

L



T-MXP-4005EUU
4 x 4 4 x 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET) 16A SINGLE
UNSWITCHED SOCKET OUTLET VERTICAL
MONOBLOCK

L

MONOBLOCK
QUICK & EASY
CONNECTION

TITANIUM - SOCKET MODULE



T-MXM-P001EU
1.6A SLIMLINE SOCKET (NEW ZA PLUG SOCKET) SOCKET **SMALL** MODULE



TITANIUM - SOCKET MODULE



T-MXM-P001U
1.6A SINGLE UNSWITCHED SOCKET **MEDIUM** MODULE



TITANIUM - SOCKET MODULE



T-MXM-P001H
1.6A SINGLE SWITCHED SOCKET OUTLET HORIZONTAL **LARGE** MODULE



TITANIUM - SOCKET MODULE



T-MXM-5001RSA
1.6A SINGLE UNSWITCHED SOCKET **SS** MODULE (SCHUKO RSA SPECIFICATION)



TITANIUM - SOCKET MODULE



T-MXM-P001V
1.6A SINGLE SWITCHED SOCKET OUTLET VERTICAL **LARGE** MODULE



T-MXM-5001S

1.6A SINGLE UNSWITCHED SOCKET **SS** MODULE **FOR EXPORT ONLY** (SCHUKO INTERNATIONAL SPECIFICATION)



NEW!

TITANIUM - SOCKET MODULE



T-MXM-P001EUU
1.6A SLIMLINE SOCKET (NEW ZA PLUG SOCKET) & 1.6A SINGLE UNSWITCHED SOCKET OUTLET VERTICAL **LARGE** MODULE - **MONOBLOCK**



TITANIUM - SOCKET MODULE



T-MXM-MFS
1.6A MULTI-FUNCTION UNSWITCHED SOCKET **MEDIUM** MODULE



TITANIUM - SOCKET MODULE



T-MXM-P003EU
3 x 1.6A NEW ZA PLUG SOCKETS **LARGE** MODULE **MONOBLOCK**



NEW!

TITANIUM - USB MODULE



T-MXM-C001
18W USB TYPE-C WITH QUICK CHARGE & 5V 3A USB 3.0 SWITCHED **SS** MODULE



PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.



TITANIUM - SATELLITE MODULE



T-MXM-001SAT
SATELLITE SMALL MODULE

S

TITANIUM - TV MODULE



T-MXM-001TV
TELEVISION SMALL MODULE

S

T-MXM-001ITV
ISOLATED TELEVISION SMALL MODULE

TITANIUM - DATA MODULE



T-MXM-001DAT
DATA SMALL MODULE RJ45

S

TITANIUM - TELEPHONE MODULE



T-MXM-001TEL
TELEPHONE SMALL MODULE RJ11

S

TITANIUM - HDMI MODULE



T-MXM-HDMI
HIGH DEFINITION MULTIMEDIA
INTERFACE SMALL MODULE

S

TITANIUM - USB MODULE



T-MXM-P01USB
5V 2A USB SOCKET SMALL
MODULE

S

TITANIUM - AUDIO MODULE



T-MXM-AUDR
AUDIO MODULE POSITIVE RED
SMALL MODULE

S

TITANIUM - AUDIO MODULE



T-MXM-AUDB
AUDIO MODULE NEGATIVE BLACK
SMALL MODULE

S


PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.



TITANIUM - SWITCH MODULE

T-MXM-S001
16A 1 WAY SWITCH **SMALL** MODULE S


T-MXM-S002
16A 2 WAY SWITCH **SMALL** MODULE



TITANIUM - SWITCH MODULE

T-MXM-S021B
16A 1 WAY BIGGER ROCKER SWITCH **MEDIUM** MODULE M


T-MXM-S022B
16A 2 WAY BIGGER ROCKER SWITCH **MEDIUM** MODULE



TITANIUM - SWITCH MODULE


T-MXM-SR01W
16A 1 WAY WIDE ROCKER SWITCH **LARGE** MODULE L

T-MXM-SR02W
16A 2 WAY WIDE ROCKER SWITCH **LARGE** MODULE




TITANIUM - BELL MODULE

T-MXM-S001B
16A BELL PRESS SWITCH **SMALL** MODULE S




TITANIUM - DIMMER MODULE

T-MXM-001D
16A DIM-ON-OFF **SMALL** MODULE S



TITANIUM - BELL MODULE

T-MXM-S001BW
16A BELL PRESS SWITCH **LARGE** MODULE L




NEW!

TITANIUM - ROTARY DIMMER MODULE

T-MXM-150D
5W-100W, 220-240VAC, 2 WAY TRAILING EDGE DIMMER **SMALL** MODULE S

T-MXM-250D
5W-250W, 220-240VAC, 2 WAY TRAILING EDGE DIMMER **SMALL** MODULE




TITANIUM - CORD GRIP MODULE

T-MXM-001CG
CORD GRIP **SMALL** MODULE S




TITANIUM - SWITCH MODULE

T-MXM-S001I
16A INTERMEDIATE SWITCH **SMALL** MODULE S




TITANIUM - SWITCH MODULE

T-MXM-I021
20A DP SWITCH **SMALL** MODULE S



TITANIUM - INDICATION MODULE


T-MXM-IND
INDICATION **SMALL** MODULE S



TITANIUM - SWITCH MODULE

T-MXM-SS001
16A 1 LEVER 1 WAY SPLIT SWITCH S

T-MXM-SS002
16A 1 LEVER 2 WAY SPLIT SWITCH




TITANIUM - BLANK MODULE

T-MXM-001BNK
BLANKING COMPONENT **SMALL** MODULE S



TITANIUM - BLANK MODULE

T-MXM-003BNK
BLANKING COMPONENT **LARGE** MODULE L




TITANIUM - ISOLATOR MODULE

T-MXM-I0230 30A 2 POLE ISOLATOR MODULE L



T-MXM-I0245 45A 2 POLE ISOLATOR MODULE

T-MXM-I0260 60A 2 POLE ISOLATOR MODULE



PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.




MATRIX RANGE - 4 X 2 YOKES - VERTICAL

	BK-MXG-2001		BK-MXG-2002W	BK-MXG-2001	4 x 2	1 LEVER YOKE ONLY
				BK-MXG-2002W	4 x 2	2 LEVER WIDE (1+1) YOKE ONLY
	BK-MXG-2002		BK-MXG-2003V	BK-MXG-2002	4 x 2	2 LEVER YOKE ONLY
				BK-MXG-2003V	4 x 2	3 LEVER YOKE ONLY








Galvanised Metal back




MATRIX RANGE - 4 X 2 YOKES - HORIZONTAL

	BK-MXG-2003H		BK-MXG-2003H	4 x 2	3 LEVER YOKE ONLY
		Galvanised Metal back			



MATRIX RANGE - 4 X 4 YOKES - VERTICAL


	BK-MXG-4001WV		BK-MXG-4002W		BK-MXG-4001WV	4 x 4	1 LEVER YOKE ONLY	
				Galvanised Metal back	BK-MXG-4002W	4 x 4	1 + 1 LEVER YOKE ONLY	

MATRIX RANGE - 4 X 4 YOKES - HORIZONTAL

	BK-MXG-4001WH		BK-MXG-4001WH	4 x 4	1 LEVER YOKE ONLY
		Galvanised Metal back			


MATRIX RANGE - BLANK COVERS

	BK-MXB-2001	4 x 2	BLANK COVERS
	BK-MXB-4001	4 x 4	BLANK COVERS



BLACK - SOCKET
BK-MXP-2001V
 4 x 2 16A SINGLE SWITCHED SOCKET
 OUTLET VERTICAL


L



BLACK - SOCKET
BK-MXP-2001H
 4 x 2 16A SINGLE SWITCHED
 SOCKET OUTLET HORIZONTAL

L


NEW!



BLACK - SOCKET
BK-MXP-2001EUU
 4 x 2 1 x 16A SLIMLINE SOCKET
 (NEW ZA PLUG SOCKET) 16A SINGLE
 UNSWITCHED SOCKET OUTLET
 VERTICAL - **MONOBLOCK**

L

NEW!




BLACK - SOCKET
BK-MXP-4003E
 4 x 2 3 x 16A SLIMLINE SOCKET
 (NEW ZA PLUG SOCKET)
MONOBLOCK

L


BLACK - 4 x 4 SOCKETS



BK-MXP-4001V
 4 x 4
 16A SINGLE
 SWITCHED SOCKET
 OUTLET VERTICAL




BK-MXP-4001H
 4 x 4
 16A SINGLE
 SWITCHED
 SOCKET OUTLET
 HORIZONTAL



BK-MXP-4002
 4 x 4
 16A DOUBLE
 SWITCHED SOCKET
 OUTLET
MONOBLOCK


NEW!

MATRIX RANGE - 4 x 4 UNSWITCHED SOCKETS - QUICK CONNECTION




BK-MXP-4001EUU
 4 x 4 1 x 16A SLIMLINE SOCKET
 (NEW ZA PLUG SOCKET) 16A
 SINGLE UNSWITCHED SOCKET
 OUTLET VERTICAL
MONOBLOCK

L




BK-MXP-4002EUU
 4x4 2 x 16A SLIMLINE SOCKET
 (NEW ZA PLUG SOCKET) 2 x 16A
 SINGLE UNSWITCHED SOCKET
 OUTLET VERTICAL
MONOBLOCK

L




BK-MXP-4003E
 4 x 4 3 x 16A SLIMLINE SOCKET
 (NEW ZA PLUG SOCKET)
MONOBLOCK

L



BK-MXP-4006E
 4 x 4 6 x 16A SLIMLINE SOCKET
 (NEW ZA PLUG SOCKET)
MONOBLOCK

L



MK-MXP-4005EUU
 4 x 4 4 x 16A SLIMLINE SOCKET
 (NEW ZA PLUG SOCKET) 16A SINGLE
 UNSWITCHED SOCKET OUTLET VERTICAL
MONOBLOCK

L

**MONOBLOCK
 QUICK & EASY
 CONNECTION**

PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.

BLACK - SOCKET MODULE



BK-MXM-P001EU
16A SLIMLINE SOCKET (NEW ZA PLUG
SOCKET) SOCKET **SMALL** MODULE



BLACK - SOCKET MODULE



BK-MXM-P001U
16A SINGLE UNSWITCHED SOCKET
MEDIUM MODULE



BLACK - SOCKET MODULE



BK-MXM-P001H
16A SINGLE SWITCHED SOCKET OUTLET
HORIZONTAL **LARGE** MODULE



BLACK - SOCKET MODULE



BK-MXM-001RSA
16A SINGLE UNSWITCHED SOCKET **SS**
MODULE (SCHUKO RSA SPECIFICATION)



BLACK - SOCKET MODULE



BK-MXM-P001V
16A SINGLE SWITCHED SOCKET OUTLET
VERTICAL **LARGE** MODULE



BLACK - SOCKET MODULE



BK-MXM-S001S
16A SINGLE UNSWITCHED SOCKET
SS MODULE **FOR EXPORT ONLY**
(SCHUKO INTERNATIONAL SPECIFICATION)

NEW!



BLACK - SOCKET MODULE
BK-MXM-P001EUU
16A SLIMLINE SOCKET (NEW ZA PLUG
SOCKET) & 16A SINGLE UNSWITCHED
SOCKET OUTLET VERTICAL
LARGE MODULE - **MONOBLOCK**



BLACK - SOCKET MODULE



BK-MXM-MFS
16A SINGLE MULTI-FUNCTION
UNSWITCHED SOCKET **MEDIUM**
MODULE



BLACK - SOCKET MODULE



BK-MXM-P003EU
3 x 16A NEW ZA PLUG SOCKETS
LARGE MODULE - **MONOBLOCK**



NEW!



BLACK - USB MODULE

BK-MXM-C001
18W USB TYPE-C WITH QUICK CHARGE &
5V 3A USB 3.0 SWITCHED **SS** MODULE



PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.



BLACK - SATELLITE MODULE



BK-MXM-001SAT
SATELLITE *SMALL* MODULE



BLACK - TV MODULE



BK-MXM-001TV
TELEVISION *SMALL* MODULE



BK-MXM-001ITV
ISOLATED TELEVISION *SMALL* MODULE

BLACK - DATA MODULE



BK-MXM-001DAT
DATA *SMALL* MODULE RJ45




BLACK - TELEPHONE MODULE



BK-MXM-001TEL
TELEPHONE *SMALL* MODULE RJ11



BLACK - HDMI MODULE



BK-MXM-HDMI
HIGH DEFINITION MULTIMEDIA
INTERFACE *SMALL* MODULE



BLACK - USB MODULE



BK-MXM-P01USB
5V 2A USB SOCKET *SMALL* MODULE



TITANIUM - AUDIO MODULE



BK-MXM-AUDR
AUDIO MODULE POSITIVE RED
SMALL MODULE



TITANIUM - AUDIO MODULE



BK-MXM-AUDB
AUDIO MODULE NEGATIVE BLACK
SMALL MODULE



PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.





BLACK - SWITCH MODULE
BK-MXM-S001
 16A 1 WAY SWITCH **SMALL** MODULE S
BK-MXM-S002
 16A 2 WAY SWITCH **SMALL** MODULE



BLACK - SWITCH MODULE
BK-MXM-S021B
 16A 1 WAY BIGGER ROCKER SWITCH **MEDIUM** MODULE M
BK-MXM-S022B
 16A 2 WAY BIGGER ROCKER SWITCH **MEDIUM** MODULE



BLACK - SWITCH MODULE
BK-MXM-SR01W
 16A 1 WAY WIDE ROCKER SWITCH **LARGE** MODULE L
BK-MXM-SR02W
 16A 2 WAY WIDE ROCKER SWITCH **LARGE** MODULE



BLACK - BELL MODULE
BK-MXM-S001B
 16A BELL PRESS SWITCH **SMALL** MODULE S



BLACK - DIMMER MODULE
BK-MXM-001D
 16A DIM-ON-OFF **SMALL** MODULE S



BLACK - BELL MODULE
BK-MXM-S001BW
 16A BELL PRESS SWITCH **LARGE** MODULE L

NEW!



BLACK - ROTARY DIMMER MODULE
BK-MXM-150D
 5W-100W, 220-240VAC, 2 WAY TRAILING EDGE DIMMER **SMALL** MODULE S
BK-MXM-250D
 5W-250W, 220-240VAC, 2 WAY TRAILING EDGE DIMMER **SMALL** MODULE



BLACK - CORD GRIP MODULE
BK-MXM-001CG
 CORD GRIP **SMALL** MODULE S



BLACK - SWITCH MODULE
BK-MXM-I021
 20A DP SWITCH **SMALL** MODULE S



BLACK - SWITCH MODULE
BK-MXM-S0011
 16A INTERMEDIATE SWITCH **SMALL** MODULE S



BLACK - SWITCH MODULE
BK-MXM-SS001
 16A 1 LEVER 1 WAY SPLIT SWITCH S
BK-MXM-SS002
 16A 1 LEVER 2 WAY SPLIT SWITCH



BLACK - INDICATION MODULE
BK-MXM-IND
 INDICATION **SMALL** MODULE S



BLACK - BLANK MODULE
BK-MXM-001BNK
 BLANKING COMPONENT **SMALL** MODULE S



BLACK - BLANK MODULE
BK-MXM-003BNK
 BLANKING COMPONENT **LARGE** MODULE L




BLACK - ISOLATOR MODULE
BK-MXM-I0230 30A 2 POLE ISOLATOR MODULE L
BK-MXM-I0245 45A 2 POLE ISOLATOR MODULE
BK-MXM-I0260 60A 2 POLE ISOLATOR MODULE

PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.

WOOD GRAIN YOKES

MATRIX RANGE - 4 X 2 YOKES WOOD GRAIN



Galvanised Metal back

WB-MXG-2003 3 LEVER YOKE

WOOD & BLACK BEZEL


WT-MXG-2003 3 LEVER YOKE

WOOD & TITANIUM BEZEL

Due to the Organic nature of Wood there may be some colour variances in the product.

WHITE GLASS YOKES

MATRIX RANGE - 4 X 2 YOKES WHITE GLASS



Galvanised Metal back


WGB-MXG-2003 3 LEVER YOKE WHITE GLASS & BLACK BEZEL

WGT-MXG-2003 3 LEVER YOKE WHITE GLASS & TITANIUM BEZEL

WGW-MXG-2003 3 LEVER YOKE WHITE GLASS & WHITE BEZEL

BLACK GLASS YOKES

MATRIX RANGE - 4 X 2 YOKES BLACK GLASS



Galvanised Metal back

BGB-MXG-2003 3 LEVER YOKE BLACK GLASS & BLACK BEZEL

BGT-MXG-2003 3 LEVER YOKE BLACK GLASS & TITANIUM BEZEL

BGW-MXG-2003 3 LEVER YOKE BLACK GLASS & WHITE BEZEL

SELECT MODULES TO SUIT REFER TO PAGE 129-131 136-138, 141-143.

*SPARE BEZELS AVAILABLE ON REQUEST

WOOD GRAIN YOKES

MATRIX RANGE - 4 X 4 YOKES WOOD GRAIN



WB-MXG-4001W

1 LEVER YOKE WOOD & BLACK BEZEL

WT-MXG-4001W

1 LEVER YOKE WOOD & TITANIUM BEZEL



WB-MXG-4002W

1+1 LEVER YOKE WOOD & BLACK BEZEL

WT-MXG-4002W

1+1 LEVER YOKE WOOD & TITANIUM BEZEL

Galvanised Metal back

Due to the Organic nature of Wood there may be some colour variances in the product.

WHITE GLASS YOKES

MATRIX RANGE - 4 X 4 YOKES WHITE GLASS



WGB-MXG-4001W

1 LEVER YOKE WHITE GLASS & BLACK BEZEL

WGT-MXG-4001W

1 LEVER YOKE WHITE GLASS & TITANIUM BEZEL

WGW-MXG-4001W

1 LEVER YOKE WHITE GLASS & WHITE BEZEL



WGB-MXG-4002W

1+1 LEVER YOKE WHITE GLASS & BLACK BEZEL

WGT-MXG-4002W

1+1 LEVER YOKE WHITE GLASS & TITANIUM BEZEL

WGW-MXG-4002W

1+1 LEVER YOKE WHITE GLASS & WHITE BEZEL

BLACK GLASS YOKES

MATRIX RANGE - 4 X 4 YOKES BLACK GLASS



BGB-MXG-4001W

1 LEVER YOKE BLACK GLASS & BLACK BEZEL

BGT-MXG-4001W

1 LEVER YOKE BLACK GLASS & TITANIUM BEZEL

BGW-MXG-4001W

1 LEVER YOKE BLACK GLASS & WHITE BEZEL



BGB-MXG-4002W

1+1 LEVER YOKE BLACK GLASS & BLACK BEZEL

BGT-MXG-4002W

1+1 LEVER YOKE BLACK GLASS & TITANIUM BEZEL


BGW-MXG-4002W

1+1 LEVER YOKE BLACK GLASS & WHITE BEZEL

CALCE AVORIO STONE YOKES

NEW!

MATRIX RANGE - 4X2 | 4 X 4 & CLUSTER STONE YOKES

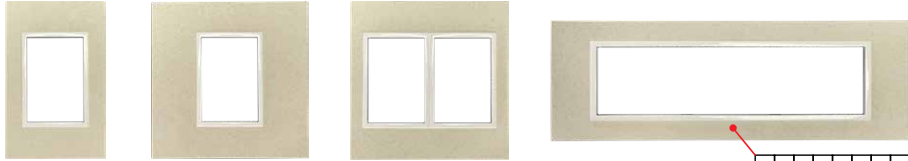

Galvanised Metal back



AVORIO-2003-W

1 LEVER YOKE CALCE AVORIO & WHITE BEZEL

AVORIO-4001-W

1 LEVER YOKE CALCE AVORIO & WHITE BEZEL



AVORIO-4002-W

1+1 LEVER YOKE CALCE AVORIO & WHITE BEZEL

AVORIO-1008-W

8 LEVER YOKE CALCE AVORIO & WHITE BEZEL CLUSTER + BOX

Due to the Organic nature of Stone there may be some colour variances in the product.

OSSIDO BRUNO STONE YOKES

NEW!

MATRIX RANGE - 4X2 | 4 X 4 & CLUSTER STONE YOKES



Galvanised Metal back



BRUNO-2003-B

1 LEVER YOKE OSSIDO BRUNO & BLACK BEZEL

BRUNO-4001-B

1 LEVER YOKE OSSIDO BRUNO & BLACK BEZEL



BRUNO-4002-B

1+1 LEVER YOKE OSSIDO BRUNO & BLACK BEZEL

BRUNO-1008-B

8 LEVER YOKE OSSIDO BRUNO & BLACK BEZEL CLUSTER + BOX

Due to the Organic nature of Stone there may be some colour variances in the product.

CALCE GRIOGIO STONE YOKES

NEW!

MATRIX RANGE - 4X2 | 4 X 4 & CLUSTER STONE YOKES



Galvanised Metal back



GRIOGIO-2003-W

1 LEVER YOKE CALCE GRIOGIO & WHITE BEZEL

GRIOGIO-4001-W

1 LEVER YOKE CALCE GRIOGIO & WHITE BEZEL



GRIOGIO-4002-W

1+1 LEVER YOKE CALCE GRIOGIO & WHITE BEZEL

GRIOGIO-1008-W


8 LEVER YOKE CALCE GRIOGIO & WHITE BEZEL CLUSTER + BOX

Due to the Organic nature of Stone there may be some colour variances in the product.

FILO MERCURIO STONE YOKES

NEW!

MATRIX RANGE - 4X2 | 4 X 4 & CLUSTER STONE YOKES

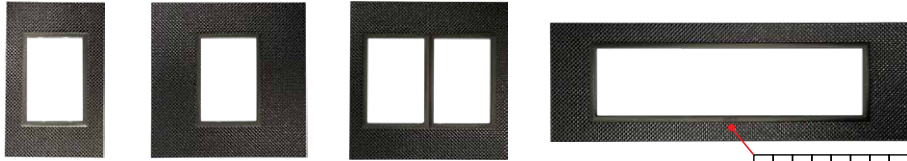

Galvanised Metal back



MERCURIO-2003-B

1 LEVER YOKE FILO MERCURIO & BLACK BEZEL

MERCURIO-4001-B

1 LEVER YOKE FILO MERCURIO & BLACK BEZEL



MERCURIO-4002-B

1+1 LEVER YOKE FILO MERCURIO & BLACK BEZEL

MERCURIO-1008-B

8 LEVER YOKE FILO MERCURIO & BLACK BEZEL CLUSTER + BOX

Due to the Organic nature of Stone there may be some colour variances in the product.

TRAVERTON NAVONA STONE YOKES

NEW!

MATRIX RANGE - 4X2 | 4 X 4 & CLUSTER STONE YOKES



Galvanised Metal back



NAVONA-2003-W

1 LEVER YOKE TRAVERTON NAVONA & WHITE BEZEL

NAVONA-4001-W

1 LEVER YOKE TRAVERTON NAVONA & WHITE BEZEL



NAVONA-4002-W

1+1 LEVER YOKE TRAVERTON NAVONA & WHITE BEZEL

NAVONA-1008-W

8 LEVER YOKE TRAVERTON NAVONA & WHITE BEZEL CLUSTER + BOX

Due to the Organic nature of Stone there may be some colour variances in the product.

FOKOS PIOMBO STONE YOKES

NEW!

MATRIX RANGE - 4X2 | 4 X 4 & CLUSTER STONE YOKES



Galvanised Metal back



PIOMBO-2003-T

1 LEVER YOKE FOKOS PIOMBO & TITANIUM BEZEL

PIOMBO-4001-T

1 LEVER YOKE FOKOS PIOMBO & TITANIUM BEZEL



PIOMBO-4002-T

1+1 LEVER YOKE FOKOS PIOMBO & TITANIUM BEZEL

PIOMBO-1008-T

8 LEVER YOKE FOKOS PIOMBO & TITANIUM BEZEL CLUSTER + BOX

Due to the Organic nature of Stone there may be some colour variances in the product.

CALCE TORTORA STONE YOKES

NEW!

MATRIX RANGE - 4X2 | 4 X 4 & CLUSTER STONE YOKES



Galvanised Metal back



TORTORA-2003-B

1 LEVER CALCE TORTORA & BLACK BEZEL

TORTORA-4001-B

1 LEVER YOKE CALCE TORTORA & BLACK BEZEL



TORTORA-4002-B

1+1 LEVER YOKE CALCE TORTORA & BLACK BEZEL

TORTORA-1008-B

8 LEVER YOKE CALCE TORTORA & BLACK BEZEL CLUSTER + BOX

Due to the Organic nature of Stone there may be some colour variances in the product.

OSSIDO VERDE STONE YOKES

NEW!

MATRIX RANGE - 4X2 | 4 X 4 & CLUSTER STONE YOKES



Galvanised Metal back



VERDE-2003-B

1 LEVER YOKE OSSIDO VERDE & BLACK BEZEL

VERDE-4001-B

1 LEVER YOKE OSSIDO VERDE & BLACK BEZEL



VERDE-4002-B

1+1 LEVER YOKE OSSIDO VERDE & BLACK BEZEL

VERDE-1008-B

8 LEVER YOKE OSSIDO VERDE & BLACK BEZEL CLUSTER + BOX

Due to the Organic nature of Stone there may be some colour variances in the product.

SELECT MODULES TO SUIT REFER TO PAGE 129-131 136-138, 141-143.

*SPARE BEZELS AVAILABLE ON REQUEST



EMPTY ENCLOSURES

1 MODULE ENCLOSURE



MXM-OF0551

1 WAY ENCLOSURE IP55




2 MODULE ENCLOSURE



MXM-OF0552

2 WAY ENCLOSURE IP55



3 MODULE ENCLOSURE



MXM-OF0553

3 WAY ENCLOSURE IP55




4 MODULE ENCLOSURE



MXM-OF0554

4 WAY ENCLOSURE IP55




6 MODULE ENCLOSURE



MXM-OF0556


6 WAY ENCLOSURE IP55



CREATE YOUR OWN COMBINATIONS TO SUIT YOUR NEEDS:



REFER TO PAGE 129-131 TO
SELECT SUITABLE MODULES

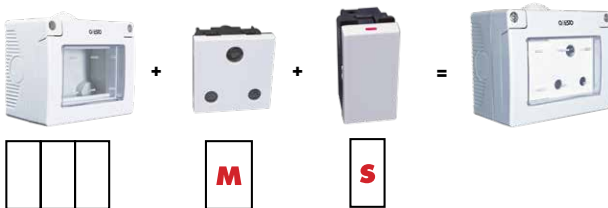

OUTDOOR



UNSWITCHED SOCKET

MXM-OF001EU

16A SLIMLINE SOCKET (NEW ZA PLUG SOCKET) SURFACE MOUNT IP55



UNSWITCHED SOCKET

MXM-OF001U

16A UNSWITCHED SOCKET SURFACE MOUNT IP55



SWITCHED SOCKET

MXM-OF05001

16A SWITCHED SOCKET SURFACE MOUNT IP55



SCHUKO SOCKET

MXM-OF001RSA

16A SCHUKO SOCKET SURFACE MOUNT IP55

(RSA SPECIFICATION)



1 LEVER SWITCH

MXM-OF5001

1 LEVER 1 WAY SWITCH SURFACE MOUNT IP55



1 LEVER SWITCH

MXM-OF1021

20A 2 POLE SWITCH SURFACE MOUNT IP55



1 LEVER SWITCH

MXM-OF5002

1 LEVER 2 WAY SWITCH SURFACE MOUNT IP55



2 LEVER SWITCH

MXM-OF5552

2 LEVER 1 WAY SURFACE MOUNT IP55



3 LEVER SWITCH

MXM-OF5553

3 LEVER 1 WAY SURFACE MOUNT IP55



4 LEVER SWITCH

MXM-OF5554


4 LEVER 1 WAY SURFACE MOUNT IP55



6 LEVER SWITCH

MXM-OF5556

6 LEVER 1 WAY SURFACE MOUNT IP55



OUTDOOR

OFFICE SOLUTIONS



COMPLETE POP UP TOWERS



DESKS OR COUNTER TOPS



POP UP

MX5-222

STAINLESS STEEL TOP COVER. 16A OVERLOAD PROTECTION SWITCH. 3 X NEW ZA SOCKETS. 2 X 16A UNSWITCHED SOCKETS. 2 X USB CHARGER (2.1A, 5VDC). 1,4M EXTENSION CORD.

Cut Out Size : 95mm



POP UP

MX5-412

STAINLESS STEEL TOP COVER. 16A OVERLOAD PROTECTION SWITCH. 5 X NEW ZA SOCKETS. 1 X 16A UNSWITCHED SOCKETS. 2 X USB CHARGER (2.1A, 5VDC). 1,4M EXTENSION CORD.

Cut Out Size : 95mm



POP UP

MX5-420

STAINLESS STEEL TOP COVER. 16A OVERLOAD PROTECTION SWITCH. 5 X NEW ZA SOCKETS. 2 X 16A UNSWITCHED SOCKETS. 1,4M EXTENSION CORD.

Cut Out Size : 95mm



POP UP

MX5-602

STAINLESS STEEL TOP COVER. 16A OVERLOAD PROTECTION SWITCH. 7 X NEW ZA SOCKETS. 2 X USB CHARGER (2.1A, 5VDC). 1,4M EXTENSION CORD.

Cut Out Size : 95mm



POP UP - STANDARD

E-POP3

PLASTIC TOP COVER. 3X 16A UNSWITCHED SOCKETS. 2 X NEW ZA PLUG SOCKETS.

Cut Out Size : 80mm



POP UP - USB CHARGING PORT

E-POP4

PLASTIC TOP COVER. 2X USB CHARGING PORTS. 2X 16A UNSWITCHED SOCKETS. 2 X NEW ZA PLUG SOCKETS.

Cut Out Size : 80mm

UNPOPULATED POP UP FLOOR HOUSINGS




UNPOPULATED FLOOR HOUSING

FB-SPU-5S
ALUMINIUM ALLOY. 3 WAY
POP UP SQUARE HOUSING.



UNPOPULATED FLOOR HOUSING

FB-SPU-26L
ALUMINIUM ALLOY. 4 WAY
POP UP SQUARE HOUSING.



UNPOPULATED FLOOR HOUSING

FB-SPU-88N
ALUMINIUM ALLOY. 3 WAY
POP UP ROUND HOUSING.




UNPOPULATED FLOOR HOUSING

FB-SPU-12L
ALUMINIUM ALLOY.
6 WAY POP UP
RECTANGULAR
ENCLOSURE.



CREATE YOUR OWN COMBINATIONS

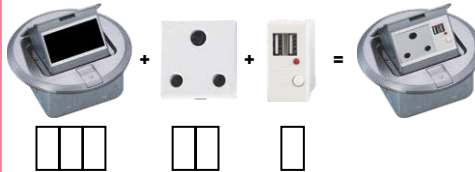

*NOTE ALL WHITE MATRIX MODULES WILL FIT INTO THE POP UP FLOOR HOUSINGS EXCEPT FOR THE MXM-POO1USB, BK-MXM-PO1USB & T-MXM-PO1USB.

ON THE FB-SPU-5RB/RW & FB-SPU-8RB/RW
PLEASE USE THE FBM-USB2 OR 3 (AVAILABLE IN WHITE ONLY)

UNPOPULATED DESK, COUNTERS & CABINET HOUSINGS

*ALL MATRIX MODULES WILL FIT INTO THE ITEMS BELOW.

UNPOPULATED GROMMET HOUSING



MX2
DIE CAST ALUMINIUM. 3 WAY GROMMET ROUND HOUSING.



Cut Out Size : 100mm

UNPOPULATED FLUSH MOUNTED HOUSING



MX3
ALUMINIUM 9 WAY FLUSH MOUNTED HOUSING FOR DESKS, COUNTERS & CABINETS.




Cut Out Size : 252mm x 115mm

UNPOPULATED FLUSH MOUNTED HOUSING



MX4
ALUMINIUM . 10 WAY FLUSH MOUNTED HOUSING FOR DESKS, COUNTERS & CABINETS.




Cut Out Size : 315mm x 132mm

UNPOPULATED FLUSH MOUNTED HOUSING



FB-ST5-227
SILVER ALUMINIUM. 8 WAY FLUSH MOUNTED HOUSING FOR DESKS, COUNTERS & CABINETS.



Cut Out Size : 340mm x 72mm

CREATE YOUR OWN COMBINATIONS



+



+



+



+



+



=



CREATE YOUR OWN COMBINATIONS



+




+



+



=



MODULES FOR POP UP FLOOR HOUSINGS & FLUSH MOUNTED HOUSING

MODULES FOR POP UP FLOOR HOUSINGS & POWER SKIRTING (PAGE 117)



OPS-001
SINGLE 16A 250V POWER SKIRTING
SOCKET



OPSD-001
SINGLE 16A 250V POWER SKIRTING
DEDICATED SOCKET RED



MXM-1402-2001
13A BRITISH STANDARD SWITCHED
SOCKET FOR EXPORT ONLY



OPSD-001BL
SINGLE 16A 250V POWER SKIRTING
DEDICATED SOCKET BLUE



OPSD-001BK
SINGLE 16A 250V POWER SKIRTING
DEDICATED SOCKET BLACK



PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.





switch2slim

ONESTO[®]

Quality has a name!

ORACLE RANGE

Are you tired of the same old, mundane light switch & socket? Available in Black Graphite and White with titanium, champagne, copper or pearl surrounds, the Oracle Range will elevate your light switches & sockets to the same aesthetically pleasing standards as the rest of the room.

- Modern Slim 8.5mm Profile
- Blends Seamlessly To Any Surface
- Sleek & Stylish Design
- Quality Durable Polycarbonate
- Conforms To SANS 60669-1 & SANS 60884-1

Give your room the switch & socket it deserves.



Available in black, white, champagne, copper or pearl.



ORACLE RANGE - 1 LEVER SWITCH

ON2011
1 LEVER 1 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2
ON2012
1 LEVER 2 WAY SWITCH, 8 PER BOX, 80 PER CTN 4 X 2



ORACLE RANGE - 2 LEVER SWITCH

ON2021
2 LEVER 1 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2
ON2022
2 LEVER 2 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2



ORACLE RANGE - 3 LEVER SWITCH

ON2031
3 LEVER 1 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2
ON2032
3 LEVER 2 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2



ORACLE RANGE - 4 LEVER SWITCH

ON2041
4 LEVER 1 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2
ON2042
4 LEVER 2 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2



ORACLE RANGE - 5 LEVER SWITCH

ON2051
5 LEVER 1 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2
ON2052
5 LEVER 2 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2



ORACLE RANGE - 6 LEVER SWITCH

ON2061
6 LEVER 1 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2
ON2062
6 LEVER 2 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2



ORACLE RANGE - SWITCHED SOCKET

ONP2001
SINGLE SWITCH SOCKET HORIZONTAL
8 PER BOX, 80 PER CTN
4 X 2



ORACLE RANGE - SWITCHED SOCKET

ONP2001V
SINGLE SWITCH SOCKET VERTICAL
8 PER BOX, 80 PER CTN
4 X 2



ORACLE RANGE - SWITCHED SOCKET

ONP2011
SINGLE RSA & NEW ZA PLUG SOCKET, 4 X 2
8 PER BOX, 80 PER CTN,



ORACLE RANGE - SHAVR SOCKET

ONP5201
SHAVR PLUG
1 PER BOX
4 X 2



ORACLE RANGE - BELL SWITCH

ON2011B
BELL PUSH SWITCH
8 PER BOX, 80 PER CTN
4 X 2



ORACLE RANGE - 20A 2P SWITCH

ON2220
20A 2P SWITCH
8 PER BOX, 80 PER CTN
4 X 2



ORACLE RANGE - INTERMEDIATE SWITCH

ON2011S
4 X 2 INTERMEDIATE SWITCH
8 PER BOX, 80 PER CTN
4 X 2



ORACLE RANGE - TV SOCKET

ONT2001

TV SOCKET 4 X 2



ORACLE RANGE - SATELLITE SOCKET

ONT2002

SATELLITE SOCKET 4 X 2



ORACLE RANGE - DIMMER

ONT2003

500W 200 VA DIMMER
(ROTARY DIAL TYPE)
4 X 2



ORACLE RANGE - VIRI BRIGHT DIMMER

73678

200W LED DIMMER
4 X 2



ORACLE RANGE - DATA

ONT2004

RJ45 CAT 6
DATA SOCKET 4 X 2



ORACLE RANGE - TELEPHONE

ONT2005

RJ11 TELEPHONE SOCKET 4 X 2



ORACLE RANGE - DIMMER

ONT2006

1 LEVER DIM ON - OFF (PUSH TYPE) 4 X 2
DIMMER REGULATOR TO BE ORDERED
SEPARATELY.



ORACLE RANGE - 20A 2P SWITCH

ONT2007

20A 2P SWITCH + INDICATOR 4 X 2



ORACLE RANGE - INTERMEDIATE SWITCH

ONT2008

INTERMEDIATE SWITCH + 1 LEVER 1 WAY
4 X 2



ORACLE RANGE - THERMOSTAT

ONT2009

THERMOSTAT - UNDER FLOOR HEATING
10°-40°C
LED INDICATION 4 X 2
CONTACT RATING: 16A



ORACLE RANGE - FAN

ONT2010

FAN CONTROL 4 X 2



ORACLE RANGE - 1 LEVER SWITCH

ON4011

1 LEVER 1 WAY SWITCH 5 PER BOX
80 PER CTN 4 X 4

ON4012

1 LEVER 2 WAY SWITCH 5 PER BOX
80 PER CTN 4 X 4



ORACLE RANGE - 2 LEVER SWITCH

ON4021

2 LEVER 1 WAY SWITCH 5 PER BOX
80 PER CTN 4 X 4

ON4022

2 LEVER 2 WAY SWITCH 5 PER BOX
80 PER CTN 4 X 4



ORACLE RANGE - 3 LEVER SWITCH

ON4031

3 LEVER 1 WAY SWITCH 5 PER BOX
80 PER CTN 4 X 4

ON4032

3 LEVER 2 WAY SWITCH 5 PER BOX
80 PER CTN 4 X 4



ORACLE RANGE - 4 LEVER SWITCH

ON4041

4 LEVER 1 WAY SWITCH 5 PER BOX
80 PER CTN 4 X 4

ON4042

4 LEVER 2 WAY SWITCH 5 PER BOX
80 PER CTN 4 X 4



ORACLE RANGE - 5 LEVER SWITCH

ON4051

5 LEVER 1 WAY SWITCH
5 PER BOX, 80 PER CTN 4 X 4

ON4052

5 LEVER 2 WAY SWITCH
5 PER BOX, 80 PER CTN 4 X 4



ORACLE RANGE - 6 LEVER SWITCH

ON4061

6 LEVER 1 WAY SWITCH 5 PER BOX
80 PER CTN 4 X 4

ON4062

6 LEVER 2 WAY SWITCH 5 PER BOX
80 PER CTN 4 X 4

ORACLE RANGE - ISOLATORS



ONI2230
30A 2 POLE ISOLATOR, 8 PER BOX, 80 PER CTN, 4 X 2
ONI2330
30A 3 POLE ISOLATOR, 8 PER BOX, 80 PER CTN, 4 X 2

ORACLE RANGE - ISOLATORS



ONI2245
45A 2 POLE ISOLATOR, 8 PER BOX, 80 PER CTN, 4 X 2
ONI2345
45A 3 POLE ISOLATOR, 8 PER BOX, 80 PER CTN, 4 X 2

ORACLE RANGE - ISOLATOR



ONI4245
45A 2 POLE ISOLATOR. 5 PER BOX, 80 PER CTN, 4 X 4
ONI4345
45A 3 POLE ISOLATOR. 5 PER BOX, 80 PER CTN, 4 X 4

ORACLE RANGE - ISOLATOR



ONI4260
60A 2 POLE ISOLATOR. 5 PER BOX, 80 PER CTN, 4 X 4
ONI4360
60A 3 POLE ISOLATOR. 5 PER BOX, 80 PER CTN, 4 X 4

ORACLE RANGE - SWITCHED SOCKET



ONP4001
SINGLE SWITCHED SOCKET
5 PER BOX, 80 PER CTN, 4 X 4

ORACLE RANGE - SWITCHED SOCKET



ONP4002
DOUBLE SWITCHED SOCKET
5 PER BOX, 80 PER CTN 4 X 4

ORACLE RANGE - SWITCHED SOCKET



ONP4011
1 X RSA SWITCHED SOCKET +
1 X NEW ZA SWITCHED SOCKET
5 PER BOX, 80 PER CTN, 4 X 4

NEW!

ORACLE RANGE - SWITCHED SOCKET



ONP4012
1 X RSA SWITCHED SOCKET +
2 X NEW ZA SWITCHED SOCKET
5 PER BOX, 80 PER CTN,

ORACLE RANGE - SWITCHED SOCKET



ONP4013
1 X RSA SWITCHED SOCKET +
3 X NEW ZA SWITCHED SOCKET
5 PER BOX, 80 PER CTN,

NEW!

ORACLE RANGE - SWITCHED SOCKET



ONP4111
1 X RSA SWITCHED SOCKET +
1 X NEW ZA SWITCHED SOCKET +
1 X SCHUKO SOCKET, 5 PER BOX,
80 PER CTN, 4 X 4

ORACLE RANGE - SWITCHED SOCKET



ONP4012A
1 X RSA SWITCHED SOCKET +
2 X TYPE A USB (5VDC 2000MA MAX)
5 PER BOX, 80 PER CTN, 4 X 4

NEW!

ORACLE RANGE - SWITCHED SOCKET



ONP4012AC
1 X RSA SWITCHED SOCKET +
1 X TYPE A + 1 X TYPE C USB (5VDC
3400MA MAX) 18W
5 PER BOX, 80 PER CTN, 4 X 4

ORACLE RANGE - SWITCHED SOCKET



ONP4112A
1 X NEW ZA SWITCHED SOCKET +
1 X RSA SWITCHED SOCKET +
2 X TYPE A USB (5VDC 2000MA MAX)
5 PER BOX, 80 PER CTN, 4 X 4

NEW!

ORACLE RANGE - SWITCHED SOCKET



ONP4112AC
1 X NEW ZA SWITCHED SOCKET +
1 X RSA SWITCHED SOCKET + 1X TYPE A +
1X TYPE C USB (5VDC 3400MA MAX)
5 PER BOX, 80 PER CTN, 4 X 4

ORACLE RANGE - THERMOSTAT



ONT4009
THERMOSTAT - UNDERFLOOR HEATING
10°-40°C LED INDICATION 4 X 4
CONTACT RATING: 16A

ORACLE RANGE - BLANK COVER



ONB4002
BLANK COVER
20 PER BOX 200 PER CTN 4 X 2
ONB4001
BLANK COVER
20 PER BOX 200 PER CTN 4 X 4

ORACLE RANGE - DEDICATED SOCKETS

ONPD201

16A DEDICATED SWITCH SOCKET
8 PER BOX, 80 PER CTN, 4 X 2
AVAILABLE IN RED, BLACK, OR BLUE*

*PLEASE SPECIFY

ONPD401


16A DEDICATED SINGLE SWITCH SOCKET
5 PER BOX, 80 PER CTN, 4 X 4
AVAILABLE IN RED, BLACK, OR BLUE*

*PLEASE SPECIFY

ONPD402

16A DEDICATED DOUBLE SWITCH SOCKET
5 PER BOX, 80 PER CTN, 4 X 4
AVAILABLE IN RED, BLACK, OR BLUE*

*PLEASE SPECIFY

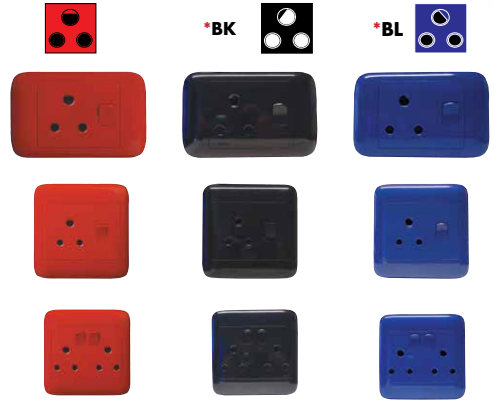

PLEASE NOTE THAT ONM2220 & ONM20IS DO NOT FIT THE REGULAR YOKES 1 LEVER TO 6 LEVER

WHITE 4 X 2 YOKES



ON2011Y	1 LEVER 1 WAY SWITCH YOKE	20 PER BOX	200 PER CTN	4 X 2
ON2021Y	2 LEVER 1 WAY SWITCH YOKE	20 PER BOX	200 PER CTN	4 X 2
ON2031Y	3 LEVER 1 WAY SWITCH YOKE	20 PER BOX	200 PER CTN	4 X 2
ON2041Y	4 LEVER 1 WAY SWITCH YOKE	20 PER BOX	200 PER CTN	4 X 2
ON2051Y	5 LEVER 1 WAY SWITCH YOKE	20 PER BOX	200 PER CTN	4 X 2
ON2061Y	6 LEVER 1 WAY SWITCH YOKE	20 PER BOX	200 PER CTN	4 X 2
ON20ISY	INTERMEDIATE OR 20A 2P + 1L 1W YOKE	20 PER BOX	200 PER CTN	4 X 2
ON2220Y	INTERMEDIATE OR 20A 2P ONLY	20 PER BOX	200 PER CTN	4 X 2

WHITE 4 X 4 YOKES



ON4011Y	1 LEVER 1 WAY SWITCH	4 X 4
ON4021Y	2 LEVER 1 WAY SWITCH	4 X 4
ON4031Y	3 LEVER 1 WAY SWITCH	4 X 4
ON4041Y	4 LEVER 1 WAY SWITCH	4 X 4
ON4051Y	5 LEVER 1 WAY SWITCH	4 X 4
ON4061Y	6 LEVER 1 WAY SWITCH	4 X 4

ORACLE RANGE - MODULE



ONM001
16A 1 WAY
SWITCH
MODULE

ORACLE RANGE - MODULE



ONM002
16A 2 WAY
SWITCH
MODULE

ORACLE RANGE - MODULE



ONM DIM
DIM ON - OFF
MODULE

ORACLE RANGE - MODULE



ONM BNK
BLANK 1 LEVER
MODULES

ORACLE RANGE - MODULE



ONM BEL
16A BELL PRESS
MODULE

ORACLE RANGE - MODULE



ONM2220
20A DP SWITCH
MODULE

ORACLE RANGE - MODULE



ONM TV
TELEVISION
MODULE

ORACLE RANGE - MODULE



ONM TEL
TELEPHONE
MODULE
RJ11

ORACLE RANGE - MODULE



ONM IND
INDICATION
MODULE

ORACLE RANGE - MODULE



ONM20IS
INTERMEDIATE
SWITCH
MODULE

ORACLE RANGE - MODULE



ONM DAT
DATA MODULE
RJ45 CAT 5
ONM DAT-6
DATA MODULE
RJ45 CAT 6

ORACLE RANGE - MODULE



ONM SAT
SATELLITE
MODULE


ORACLE RANGE - SURROUNDS 4 x 2

ON2000S-

SURROUND ONLY. 30 PER BOX, 4 X 2
AVAILABLE IN BLACK GRAPHITE, CHAMPAGNE, COPPER,
TITANIUM AND PEARL METALLIC FINISHES*

*PLEASE SPECIFY.

ON2000S WHITE SURROUND ONLY
20 PER BOX 200 PER CTN 4 X 2

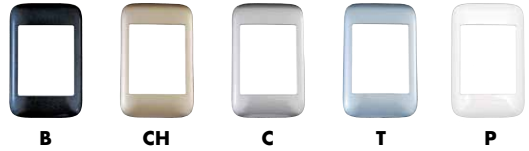

CAN BE USED FOR BOTH BLACK AND WHITE ORACLE RANGE 4X2


ORACLE RANGE - SURROUNDS 4 x 4

ON4000S-

SURROUND ONLY. 30 PER BOX, 4 X 4
AVAILABLE IN BLACK GRAPHITE, CHAMPAGNE, COPPER,
TITANIUM AND PEARL METALLIC FINISHES*

*PLEASE SPECIFY.

ON4000S WHITE SURROUND ONLY
20 PER BOX 200 PER CTN 4 X 4



CAN BE USED FOR BOTH BLACK AND WHITE ORACLE RANGE 4X4

SURROUNDS ARE VERSATILE, THEY CLIP ON AND OFF EASILY.



ON2011



ON2000S-CH
SURROUND ONLY



FINAL PRODUCT

CHANGE THE SURROUNDS TO SUIT YOUR COLOUR SCHEME NEEDS.



ON4011BK



ON4000S-P
SURROUND ONLY



FINAL PRODUCT



ORACLE RANGE - 1 LEVER SWITCH

ON2011BK

1 LEVER 1 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2

ON2012BK

1 LEVER 2 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2



ORACLE RANGE - 2 LEVER SWITCH

ON2021BK

2 LEVER 1 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2



ORACLE RANGE - 3 LEVER SWITCH

ON2031BK

3 LEVER 1 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2



ORACLE RANGE - 4 LEVER SWITCH

ON2041BK

4 LEVER 1 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2



ORACLE RANGE - 5 LEVER SWITCH

ON2051BK

5 LEVER 1 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2



ORACLE RANGE - 6 LEVER SWITCH

ON2061BK

6 LEVER 1 WAY SWITCH, 8 PER BOX, 80 PER CTN, 4 X 2



ORACLE RANGE - DIMMER

ONT2003BK

500W 200 VA DIMMER (ROTARY DIAL TYPE)
4 X 2



ORACLE RANGE - SWITCHED SOCKET

ONP2011BK


SINGLE RSA & NEW ZA PLUG SOCKET,
4 X 28 PER BOX, 80 PER CTN,



ORACLE RANGE - ISOLATOR

ONI2245BK

45A 2POLE ISOLATOR SWITCH ONLY,
5 PER BOX,
80 PER CTN, 4 X 2



ORACLE RANGE - SWITCHED SOCKET

ONP2001BK

SINGLE SWITCHED SOCKET
HORIZONTAL,
8 PER BOX,
80 PER CTN, 4 X 2



ORACLE RANGE - INTERMEDIATE SWITCH

ON2015BK

4 X 2 INTERMEDIATE SWITCH
8 PER BOX, 80 PER CTN
4 X 2



ORACLE RANGE - BLANK COVER

ONB4002BK

BLANK GRAPHITE BLACK COVER,
10 PER BOX,
80 PER CTN, 4 X 2



ORACLE RANGE - BLANK COVER

ONB4001BK

BLACK GRAPHITE BLACK COVER,
5 PER BOX,
80 PER CTN, 4 X 4

ORACLE RANGE - 1 LEVER SWITCH



ON4011BK

1 LEVER 1 WAY SWITCH, 5 PER BOX, 80 PER CTN, 4 X 4

ON4012BK

1 LEVER 2 WAY SWITCH, 5 PER BOX, 80 PER CTN, 4 X 4

ORACLE RANGE - 2 LEVER SWITCH



ON4021BK

2 LEVER 1 WAY SWITCH, 5 PER BOX, 80 PER CTN, 4 X 4

ORACLE RANGE - 3 LEVER SWITCH



ON4031BK

3 LEVER 1 WAY SWITCH, 5 PER BOX, 80 PER CTN, 4 X 4

ORACLE RANGE - 4 LEVER SWITCH



ON4041BK

4 LEVER 1 WAY SWITCH, 5 PER BOX, 80 PER CTN, 4 X 4

ORACLE RANGE - 5 LEVER SWITCH



ON4051BK

5 LEVER 1 WAY SWITCH, 5 PER BOX, 80 PER CTN, 4 X 4

ORACLE RANGE - 6 LEVER SWITCH



ON4061BK

6 LEVER 1 WAY SWITCH, 5 PER BOX, 80 PER CTN, 4 X 4



ORACLE RANGE - ISOLATORS



ONI4245BK

45A 2 POLE ISOLATOR , 5 PER BOX 80 PER CTN 4 X 4

ORACLE RANGE - ISOLATORS



ONI4260BK

60A 2 POLE ISOLATOR ,5 PER BOX 80 PER CTN 4 X 4

ORACLE RANGE - ISOLATORS



ONI4360BK

60A 3 POLE ISOLATOR 5 PER BOX 80 PER CTN 4 X 4

ORACLE RANGE - SWITCHED SOCKET



ONP4001BK

SINGLE SWITCHED SOCKET, 5 PER BOX, 80 PER CTN, 4 X 4

ORACLE RANGE - SWITCHED SOCKET



ONP4002BK

DOUBLE SWITCHED SOCKET, 5 PER BOX 80 PER CTN, 4 X 4

ORACLE RANGE - SWITCHED SOCKET



ONP4011BK

1 X RSA SWITCHED SOCKET +
1 X NEW ZA SWITCHED SOCKET,
5 PER BOX, 80 PER CTN,
4 X 4

NEW!

ORACLE RANGE - SWITCHED SOCKET



ONP4012BK

1 X RSA SWITCHED SOCKET +
2 X NEW ZA SWITCHED SOCKET,
5 PER BOX,
80 PER CTN,
4 X 4

ORACLE RANGE - SWITCHED SOCKET



ONP4013BK

1 X RSA SWITCHED SOCKET +
3 X NEW ZA SWITCHED SOCKET,
5 PER BOX,
80 PER CTN,
4 X 4

NEW!

ORACLE RANGE - SWITCHED SOCKET



ONP4111BK

1 X RSA SWITCHED SOCKET +
1 X NEW ZA SWITCHED SOCKET +
1 X SCHUKO SOCKET, 5 PER BOX,
80 PER CTN, 4 X 4

ORACLE RANGE - SWITCHED SOCKET



ONP4012ABK

1 X RSA SWITCHED SOCKET +
2 X TYPE A USB (5VDC 1000MA MAX),
5 PER BOX, 80 PER CTN, 4 X 4

NEW!

ORACLE RANGE - SWITCHED SOCKET



ONP4012ACBK

1 X RSA SWITCHED SOCKET +
1 X TYPE A + 1X TYPE C USB (5VDC
3400MA MAX) 18W, 5 PER BOX, 80 PER
CTN, 4 X 4

ORACLE RANGE - SWITCHED SOCKET



ONP4112ABK

1 X SINGLE RSA SWITCHED SOCKET +
1 X NEW ZA SWITCHED SOCKET +
2 X TYPE A USB (5VDC 2000MA MAX)
INTELLIGENT CHARGING, 5 PER BOX,
80 PER CTN, 4 X 4

NEW!

ORACLE RANGE - SWITCHED SOCKET



ONP4112ACBK

SINGLE RSA SWITCHED SOCKET +
1X NEW ZA SWITCHED SOCKET +
1X TYPE A + 1X TYPE C USB (5VDC 3400MA
MAX) 5 PER BOX, 80 PER CTN, 4 X 4

BLACK GRAPHITE 4 X 2 YOKES



ON2011YBK	1 LEVER BLACK GRAPHITE YOKE ONLY	8 PER BOX	80 PER CTN	4 X 2
ON2021YBK	2 LEVER BLACK GRAPHITE YOKE ONLY	8 PER BOX	80 PER CTN	4 X 2
ON2031YBK	3 LEVER BLACK GRAPHITE YOKE ONLY	8 PER BOX	80 PER CTN	4 X 2
ON2041YBK	4 LEVER BLACK GRAPHITE YOKE ONLY	8 PER BOX	80 PER CTN	4 X 2
ON2051YBK	5 LEVER BLACK GRAPHITE YOKE ONLY	8 PER BOX	80 PER CTN	4 X 2
ON2061YBK	6 LEVER BLACK GRAPHITE YOKE ONLY	8 PER BOX	80 PER CTN	4 X 2
ON20ISYBK	INTERMEDIATE OR 20A 2P + 1L 1W YOKE	8 PER BOX	80 PER CTN	4 X 2
ON2220YBK	INTERMEDIATE OR 20A 2P YOKE ONLY	8 PER BOX	80 PER CTN	4 X 2

BLACK GRAPHITE 4 X 4 YOKES



ON4011YBK	1 LEVER YOKE ONLY	8 PER BOX	80 PER CTN	4 X 4
ON4021YBK	2 LEVER YOKE ONLY	8 PER BOX	80 PER CTN	4 X 4
ON4031YBK	3 LEVER YOKE ONLY	8 PER BOX	80 PER CTN	4 X 4
ON4041YBK	4 LEVER YOKE ONLY	8 PER BOX	80 PER CTN	4 X 4
ON4051YBK	5 LEVER YOKE ONLY	8 PER BOX	80 PER CTN	4 X 4
ON4061YBK	6 LEVER YOKE ONLY	8 PER BOX	80 PER CTN	4 X 4

PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.

ORACLE RANGE - MODULES



ONM001BK
1 WAY BLACK
GRAPHITE
MODULE



ONM002BK
2 WAY BLACK
GRAPHITE
MODULE



ONMDIMBK
DIM ON-
OFF BLACK
GRAPHITE
MODULE



ONM20ISBK
INTERMEDIATE
SWITCH BLACK
GRAPHITE
MODULE



ONMBNKBK
1 WAY BLANK
GRAPHITE
MODULE



ONM2220BK
20A 2 POLE
SWITCH BLACK
GRAPHITE
MODULE



ONMBELBK
BELL PRESS
BLACK
GRAPHITE
MODULE



ONMDATBK
DATA BLACK
GRAPHITE
MODULE
RJ45 CAT 5



ONMSATBK
SATELLITE BLACK
GRAPHITE
MODULE



ONMTELBK
TELEPHONE
BLACK
GRAPHITE
MODULE
RJ11



ONMTVBK
TELEVISION
BLACK
GRAPHITE
MODULE



ONMDAT6-BK
DATA BLACK
GRAPHITE
MODULE
RJ45 CAT 6

ONESTO[®]

Quality has a name!



TRINITY

WIRING ACCESSORIES

Simple. Elegant. Sophisticated.

- Sleek & Modern
- Effortless Switching
- Refined Design
- 8.5mm Sized Profile
- Medium Sized Switches
- Quality Durable Polycarbonate
- Conforms To SANS 60669-1 & SANS 60884-1



TRINITY RANGE - SWITCH



TS2011
16A 1 LEVER 1 WAY SWITCH, 4X2

TRINITY RANGE - SWITCH



TS2012
16A 1 LEVER 2 WAY SWITCH, 4X2

TRINITY RANGE - SWITCH



TS2021
16A 2 LEVER 1 WAY SWITCH, 4X2

TRINITY RANGE - SWITCH



TS2022
16A 2 LEVER 2 WAY SWITCH, 4X2

TRINITY RANGE - SWITCH



TS2031
16A 3 LEVER 1 WAY SWITCH, 4X2

TRINITY RANGE - SWITCH



TS2032
16A 3 LEVER 2 WAY SWITCH, 4X2

TRINITY RANGE - BELL



TS2011B
16A 1 LEVER BELL PRESS, 4X2

TRINITY RANGE - SWITCH



TS4041
16A 4 LEVER 1 WAY SWITCH, 4X4

TRINITY RANGE - SWITCH



TS4042
16A 4 LEVER 2 WAY SWITCH, 4X4

TRINITY RANGE - SWITCH




TS4061
16A 6 LEVER 1 WAY SWITCH, 4X4

TRINITY RANGE - SWITCH



TS4062
16A 6 LEVER 2 WAY SWITCH, 4X4

TRINITY RANGE - SOCKET

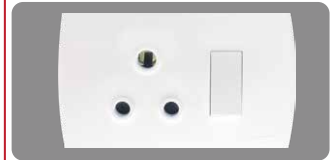

TSP2001H
SINGLE SWITCHED SOCKET
HORIZONTAL 4X2

TRINITY RANGE - SOCKET



TSP2012
SINGLE RSA & NEW ZA SWITCHED
SOCKET HORIZONTAL
4X2

TRINITY RANGE - SOCKET



TSP4001
SINGLE SWITCHED SOCKET
HORIZONTAL 4X4

TRINITY RANGE - SOCKET




TSP4002
DOUBLE SWITCHED SOCKET, 4X4

TRINITY RANGE - SOCKET



TSP4011
1X RSA SWITCHED SOCKET &
1X NEW ZA SWITCHED SOCKET
SWITCHED SOCKET, 4X4

TRINITY RANGE - SOCKET

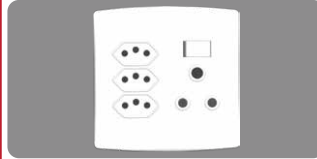

TSP4013
1 X RSA SWITCHED SOCKET +
3X NEW ZA PLUG SWITCHED SOCKET
4X4

NEW!

TRINITY RANGE - SOCKET



TSP4111
1X RSA SWITCHED SOCKET +
1X NEW ZA SWITCHED SOCKET +
1X SCHUKO SOCKET, 4X4

NEW!

TRINITY RANGE - SOCKET



TSP4112AC
1X RSA SWITCHED SOCKET +
1X NEW ZA SWITCHED SOCKET +
1X TYPE A + 1 TYPE C USB SWITCHED
(5VDC 3400MA) SOCKET, 4X4

TRINITY RANGE - ISOLATOR



TSI2230
30A 2 POLE ISOLATOR 4X2

TSI2330
30A 3 POLE ISOLATOR 4X2

TRINITY RANGE - ISOLATOR



TSI2245
45A 2 POLE ISOLATOR 4X2

TSI2345
45A 3 POLE ISOLATOR 4X2

TRINITY RANGE - ISOLATOR



TSI4245
45A 2 POLE ISOLATOR 4X4

TSI4345
45A 3 POLE ISOLATOR 4X4


TRINITY RANGE - ISOLATOR



TSI4260
60A 2 POLE ISOLATOR 4X4

TSI4360
60A 3 POLE ISOLATOR 4X4


TRINITY RANGE - SOCKET

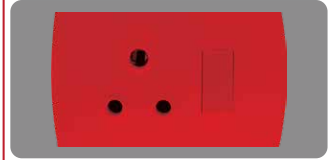

TSPD2001H
SINGLE DEDICATED SWITCHED
SOCKET HORIZONTAL 4X2


PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLING ELECTRICIAN.

TRINITY RANGE - SOCKET

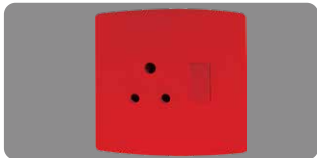

TSPD4001
SINGLE DEDICATED SWITCHED
SOCKET HORIZONTAL 4X4

TRINITY RANGE - SOCKET

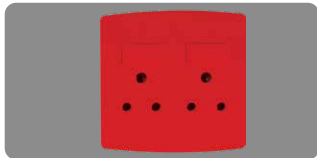

TSPD4002
DOUBLE DEDICATED SWITCHED
SOCKET, 4X4

TRINITY RANGE - YOKE



TS2011Y
1 LEVER YOKE, 4X2

TRINITY RANGE - YOKE



TS2021Y
2 LEVER YOKE, 4X2

TRINITY RANGE - YOKE



TS2031Y
3 LEVER YOKE, 4X2

TRINITY RANGE - YOKE



TS4041Y
4 LEVER YOKE, 4X4

TRINITY RANGE - YOKE



TS4061Y
6 LEVER YOKE, 4X4

TRINITY RANGE - SWITCH MODULE



TSM001
16A 1 GANG 1 WAY SWITCH
MODULE

TRINITY RANGE - SWITCH MODULE



TSM002
16A 1 GANG 2 WAY SWITCH
MODULE

NEW!

TRINITY RANGE - SWITCH MODULE



TSM2220
20A DOUBLE POLE SWITCH MODULE

TRINITY RANGE - SWITCH MODULE



TSMBEL
16A BELL PRESS SWITCH MODULE

TRINITY RANGE - SWITCH MODULE



TSMDIM
DIM-ON-OFF MODULE

PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 101.42 BY A QUALIFIED INSTALLING ELECTRICIAN.

TRINITY RANGE - SWITCH MODULE



TSMDIMR
500W ROTARY DIMMER MODULE

TRINITY RANGE - SOCKET



TSMF401W
ROTARY FAN MODULE

TRINITY RANGE - USB MODULE



TSMPO01USB
2 AMP USB SOCKET MODULE

TRINITY RANGE - TEL MODULE



TSMTEL
TELEPHONE MODULE

TRINITY RANGE - DATA MODULE



TSMDAT
DATA MODULE (CAT 5)

TRINITY RANGE - TV MODULE



TSMTV
TELEVISION MODULE

TRINITY RANGE - SATELLITE MODULE



TSMSAT
SATELLITE MODULE

TRINITY RANGE - TV MODULE



TSMITV
ISOLATOR TV MODULE

NEW!

TRINITY RANGE - SOCKET MODULE



TSM001EU
16A SLIMLINE SOCKET (NEW ZA PLUG
SOCKET) MODULE

TRINITY RANGE - BLANK MODULE



TSMBNK
1 LEVER BLANKING MODULE

TRINITY RANGE - BLANK COVER



TSB2001
4X2 BLANK COVER

TRINITY RANGE - BLANK COVER



TSB4001
4X4 BLANK COVER

TRINITY RANGE - SWITCH



BK-TS2011
16A 1 LEVER 1 WAY SWITCH, 4X2
BLACK GRAPHITE

TRINITY RANGE - SWITCH



BK-TS2012
16A 1 LEVER 2 WAY SWITCH, 4X2
BLACK GRAPHITE

TRINITY RANGE - SWITCH



BK-TS2021
16A 2 LEVER 1 WAY SWITCH, 4X2
BLACK GRAPHITE

TRINITY RANGE - SWITCH



BK-TS2022
16A 2 LEVER 2 WAY SWITCH, 4X2
BLACK GRAPHITE

TRINITY RANGE - SWITCH



BK-TS2031
16A 3 LEVER 1 WAY SWITCH, 4X2
BLACK GRAPHITE

TRINITY RANGE - SWITCH



BK-TS2032
16A 3 LEVER 2 WAY SWITCH, 4X2
BLACK GRAPHITE

TRINITY RANGE - BELL



BK-TS2011B
16A 1 LEVER BELL PRESS, 4X2
BLACK GRAPHITE

TRINITY RANGE - SWITCH



BK-TS4041
16A 4 LEVER 1 WAY SWITCH, 4X4
BLACK GRAPHITE

TRINITY RANGE - SWITCH



BK-TS4042
16A 4 LEVER 2 WAY SWITCH, 4X4
BLACK GRAPHITE

TRINITY RANGE - SWITCH



BK-TS4061
16A 6 LEVER 1 WAY SWITCH, 4X4
BLACK GRAPHITE

TRINITY RANGE - SWITCH



BK-TS4062
16A 6 LEVER 2 WAY SWITCH, 4X4
BLACK GRAPHITE



TRINITY RANGE - SOCKET



BK-TSP2001H
SINGLE SWITCHED SOCKET
HORIZONTAL, BLACK GRAPHITE, 4X2

TRINITY RANGE - SOCKET



BK-TSP2012
SINGLE RSA & NEW ZA SWITCHED
SOCKET HORIZONTAL,
BLACK GRAPHITE, 4X2

TRINITY RANGE - SOCKET



BK-TSP4001
SINGLE SWITCHED SOCKET
HORIZONTAL, BLACK GRAPHITE, 4X4

TRINITY RANGE - SOCKET



BK-TSP4002
DOUBLE SWITCHED SOCKET, 4X4
BLACK GRAPHITE

TRINITY RANGE - SOCKET



BK-TSP4011
1X RSA SWITCHED SOCKET +
1X NEW ZA SWITCHED SOCKET,
BLACK GRAPHITE ,4X4

TRINITY RANGE - SOCKET



BK-TSP4013
1 X RSA SWITCHED SOCKET +
3 X NEW ZA SWITCHED SOCKET
BLACK GRAPHITE, 4X4

NEW!

TRINITY RANGE - SOCKET



BK-TSP4111
1X RSA SWITCHED SOCKET +
1X NEW ZA SWITCHED SOCKET +
1X SCHUKO SOCKET, 4X4

NEW!

TRINITY RANGE - SOCKET



BK-TSP4112AC
1X RSA SWITCHED SOCKET +
1X NEW ZA SWITCHED SOCKET +
1X TYPE A + 1 TYPE C USB SWITCHED
(5VDC 3400MA) SOCKET, 4X4

TRINITY RANGE - ISOLATOR



BK-TSI2230
30A 2 POLE ISOLATOR, BLACK GRAPHITE, 4X2

BK-TSI2330
30A 3 POLE ISOLATOR BLACK GRAPHITE, 4X2

TRINITY RANGE - ISOLATOR



BK-TSI2245
45A 2 POLE ISOLATOR, BLACK GRAPHITE, 4X2

BK-TSI2345
45A 3 POLE ISOLATOR, BLACK GRAPHITE, 4X2

TRINITY RANGE - ISOLATOR



BK-TSI4245
45A 2 POLE ISOLATOR, BLACK GRAPHITE, 4X4

BK-TSI4345
45A 3 POLE ISOLATOR, BLACK GRAPHITE, 4X4

TRINITY RANGE - ISOLATOR



BK-TSI4260
60A 2 POLE ISOLATOR, BLACK GRAPHITE, 4X4

BK-TSI4360
60A 3 POLE ISOLATOR, BLACK GRAPHITE, 4X4

TRINITY RANGE - YOKE



BK-TS2011Y
1 LEVER YOKE, 4X2

TRINITY RANGE - YOKE



BK-TS2021Y
2 LEVER YOKE, 4X2

TRINITY RANGE - YOKE



BK-TS2031Y
3 LEVER YOKE, 4X2

TRINITY RANGE - YOKE



BK-TS4041Y
4 LEVER YOKE, 4X4

TRINITY RANGE - YOKE



BK-TS4061Y
6 LEVER YOKE, 4X4

TRINITY RANGE - SWITCH MODULE



BK-TSM-001
16A 1 GANG 1 WAY SWITCH
MODULE

TRINITY RANGE - SWITCH MODULE



BK-TSM-002
16A 1 GANG 2 WAY SWITCH
MODULE

NEW!

TRINITY RANGE - SWITCH MODULE



BK-TSM2220
20A DOUBLE POLE SWITCH MODULE

TRINITY RANGE - SWITCH MODULE



BK-TSMBEL
16A BELL PRESS SWITCH MODULE

TRINITY RANGE - SWITCH MODULE



BK-TSM-DIM
DIM-ON-OFF MODULE

TRINITY RANGE - SWITCH MODULE



BK-TSM-DIMR
500W ROTARY DIMMER MODULE

TRINITY RANGE - SOCKET



BK-TSMF401W
400W ROTARY FAN MODULE

TRINITY RANGE - USB MODULE



BK-TSMUSB
2 AMP USB SOCKET MODULE

TRINITY RANGE - TEL MODULE



BK-TSMTEL
TELEPHONE MODULE

TRINITY RANGE - DATA MODULE



BK-TSMDAT
DATA MODULE (CAT 5)

TRINITY RANGE - TV MODULE



BK-TSMTV
TELEVISION MODULE

TRINITY RANGE - SATELLITE MODULE



BK-TSMSAT
SATELLITE MODULE

TRINITY RANGE - TV MODULE



BK-TSMITV
ISOLATOR TV MODULE

NEW!

TRINITY RANGE - SOCKET MODULE



BK-TSM001EU
BLACK 16A SLIMLINE SOCKET
(NEW ZA PLUG SOCKET) MODULE

TRINITY RANGE - BLANK MODULE



BK-TSMBNK
1 LEVER BLANKING MODULE

TRINITY RANGE - BLANK COVER



BK-TSB2001
4X2 BLANK COVER

TRINITY RANGE - BLANK COVER



BK-TSB4001
4X4 BLANK COVER



PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.

POWER SKIRTING - SYS45 RAPID



Compatible with
Matrix Modules

SYS1252

125x50x2

2 COMPARTMENT 2m TRUNKING WHITE RAL9010

POWER SKIRTING - SYS45 RAPID



LD125LBEU

L JOINT FOR FLAT BEND

POWER SKIRTING - SYS45 RAPID



LD125EBEU

OUTER BEND

POWER SKIRTING - SYS45 RAPID



LD125IBEU

INNER BEND

POWER SKIRTING - SYS45 RAPID



LD125TBEU

T JOINT FOR WALL DEVIATIONS

POWER SKIRTING - SYS45 RAPID



SC045

SPARE COVER

POWER SKIRTING - SYS45 RAPID



STT125BEU

END CAP FOR ABOVE TRUNKING

POWER SKIRTING - SYS45 RAPID



SGCOBEU

COVER JOINT



LD125GBEU

COMPLETE COVER JOINT

INDUSTRIAL SOCKET



ONPI-001

SINGLE SWITCHED INDUSTRIAL SOCKET
4 PER BOX, 40 PER CTN

INDUSTRIAL SOCKET



ONPI-002

DOUBLE SWITCHED INDUSTRIAL SOCKET
4 PER BOX, 40 PER CTN

COVER



ON2000PC

PROTECTIVE COVER 4 X 2



ON4000PC

PROTECTIVE COVER 4 X 4

WALL BOXES



ONGW2001

4 X 2; 0,5MM
GALVANISED STEEL WALL BOX

ONGW4001

4 X 4; 0,5MM
GALVANISED STEEL WALL BOX

WALL BOXES



ONEC2001

4 X 2; 0,5MM;
CLOSED EXTENSION STEEL WALL BOX



ONEC4001

4 X 4; 0,5MM
CLOSED EXTENSION STEEL WALL BOX

WALL BOXES



ONEO2001

4 X 2; 0,5MM
OPEN EXTENSION STEEL WALL BOX



ONEO4001

4 X 4; 0,5MM
OPEN EXTENSION STEEL WALL BOX

UTILITY BOX



OPS-01

4X2 DMC SOCKET ENCLOSURE

UTILITY BOX



OPS-02

4X4 DMC SOCKET ENCLOSURE

UTILITY BOX



OPSMJB

2X2 DMC JUNCTION BOX



ORACLE RANGE - POWER SKIRTING SOCKET



OPS-001
SINGLE 16A 250V POWER SKIRTING
SOCKET

ORACLE RANGE - POWER SKIRTING SOCKET



OPSD-001
SINGLE 16A 250V POWER SKIRTING
DEDICATED SOCKET RED

ORACLE RANGE - POWER SKIRTING SOCKET



OPSD-001BK
SINGLE 16A 250V POWER SKIRTING
DEDICATED SOCKET BLACK

ORACLE RANGE - POWER SKIRTING SOCKET



OPSD-001BL
SINGLE 16A 250V POWER SKIRTING
DEDICATED SOCKET BLUE

ORACLE RANGE - MINI SOCKET



OMS001
MINI SOCKET PANEL MOUNT



OMSD001
MINI RED DEDICATED SOCKET PANEL
MOUNT

ORACLE RANGE - BRITISH STANDARD



MXM-1402-2001
13A BRITISH STANDARD SWITCHED
SOCKET FOR EXPORT ONLY



ORACLE RANGE - MINI SOCKET

ORF5001
6A 3 PIN FLUSH MOUNT SOCKET - ROUND

PLEASE ENSURE THAT THE MODULES ARE ASSEMBLED ACCORDING TO SANS 10142 BY A QUALIFIED INSTALLATION ELECTRICIAN.

ORACLE RANGE - MODULE CRADLES



OPS-BNK
POWER SKIRTING BLANK MODULE



OPS-MA
WHITE SINGLE MODULE ADAPTOR



T-OPS-MA
TITANIUM SINGLE MODULE ADAPTOR



BK-OPS-MA
BLACK SINGLE MODULE ADAPTOR

POWER SKIRTING - CORD GRIP



MXM-001CG
CORD GRIP MODULE

POWER SKIRTING - CORD GRIP



T-MXM-001CG
TITANIUM CORD GRIP MODULE

POWER SKIRTING - CORD GRIP



BK-MXM-001CG
BLACK CORD GRIP MODULE

TERMS AND CONDITIONS OF SALE

ORDERS

1. Orders placed by the Customer shall constitute irrevocable offers to purchase the Products in question at Company's list prices and shall be capable of acceptance by the Company in writing or by way of actual delivery. Oral orders shall be capable of acceptance by the Company however the Company will not be responsible for any errors or misunderstandings occasioned by the Customer's failure to make orders in writing. Every order placed by the Customer will be a separate and distinct order subject to these terms and conditions.

RETURNS

2. Returns of goods ordered will only be accepted at the sole discretion on the Company and if accepted shall be subject to the following conditions:

- 2.1 All returns accepted by the Company will be subject to a handling fee as determined within the sole discretion of the company;
- 2.2 The goods returned must be in their original packaging and condition;
- 2.3 All returns are to be accompanied by copies of the original orders, delivery notes, invoices and statements.

DELIVERY

3. Although the Company will use its reasonable commercial endeavours to effect delivery of Products by the dates that it advises, the Company does not guarantee availability on any specific dates and shall not be liable for any damages for failure to effect delivery timeously for any reason. The Customer shall not be entitled to cancel any order by reason of such delay.

4. Delivery shall be made at the address nominated by the Customer for delivery and agreed to by the Company, alternatively FOB a carrier nominated by the Customer, alternatively when the Company gives written notice to the Customer that the Products are ready for collection. The Company shall have the right, within its sole discretion, to levy delivery charges to Customer.

5. Risk in and to the Products shall pass to the Customer or carrier on delivery having been effected by the Company. The Customer warrants that the signatory to any order, tax invoice, delivery note or other documentation of the Company made out in the name of the Customer is duly authorised to bind the Customer in relation to the transaction and shall also constitute *prima facie* proof of the proper delivery of the Products to the Customer.

WARRANTY

Where Products are defective or damaged, the Company's liability shall be limited, in its sole discretion, to replacing the defective or damaged Products free of charge, or accepting return of the Products and refunding the list price paid by the

6. Customer, or to credit the Customer's account.
7. Notwithstanding anything herein contained, the Company shall not be liable for any special, consequential or otherwise or indirect damages howsoever arising, nor shall the Company be liable to any person for any direct loss and/or damage whether to a person or property howsoever arising, unless such loss or damage is directly caused by the gross negligence or wilful conduct of the Company. In such event the Company's liability shall be limited to the amount paid by the Customer in respect of the Products to which the claim relates.
8. Unless written notification is received from the Customer by the Company within seven (7) days from the date of delivery of the Products that the Products are defective, short delivered, damaged or not in accordance with the Customer's order, the Company shall not be liable for any of the aforesaid discrepancies, provided that receipt of the aforesaid notification shall only constitute proof of notification and shall have no other probative value.
9. The Company's agents and employees have no authority to give any warranties or to make any representations on its behalf and it shall be bound by none, save for those given herein.

INDEMNITY


10. The Customer hereby indemnifies the Company against all and any claims of whatsoever nature that may be made by any person against the Company, its employees, or its directors, for any loss or damage (including special, indirect and consequential damages) of any nature arising out of the Products, or arising in respect of the Products. The aforesaid indemnity includes any legal costs which may be incurred by the Company in defending and/or opposing any such claim, calculated on the scale as between attorney and own client. The Company shall not be liable to the Customer for any loss or damage (including special or consequential damages) of any nature arising out of the use of the Products, the delivery or supply or failure to deliver or supply the Products, or arising in respect of the Products whilst same are at the risk of the Customer.

IP RATING CHART

Protection of persons and protection of equipment indicated by the IP code.

Protection provided by enclosures for electrical equipment is indicated by the IP codes

CHARACTERISTIC NUMERALS

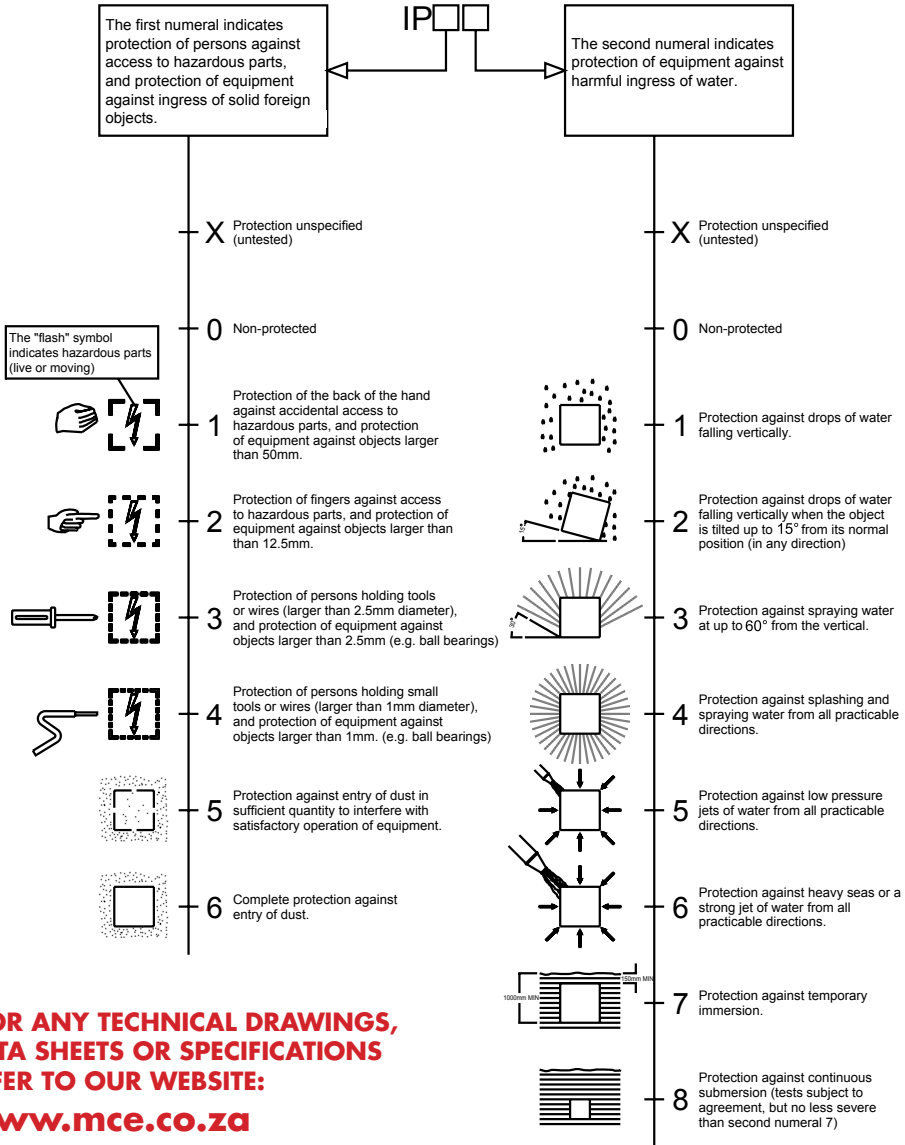

***FOR ANY TECHNICAL DRAWINGS, DATA SHEETS OR SPECIFICATIONS REFER TO OUR WEBSITE:**

www.mce.co.za

MCE[®] ELECTRIC



WWW.MCE.CO.ZA

**BROUGHT TO YOU BY YOUR LEADING
DISTRIBUTOR OF ELECTRICAL PRODUCTS**

MCE JHB (Head Office)
10 Pieter Wessels Street
Stafford Ext 2

- Tel: +27 (0) 11 683 0641
- Fax: +27 (0) 11 683 1799
- Email: salesjhb@mce.co.za

MCE PTA
129 Fusie Street
Silvertondale Ext 2

- Tel: +27 (0) 12 804 6005
- Fax: +27 (0) 12 804 5478
- Email: salespta@mce.co.za

MCE DBN
Unit 6, 2 Corobrick Rd,
Riverhorse Valley

- Tel: +27 (0) 31 569 4846
- Fax: +27 (0) 31 569 4811
- Email: salesdbn@mce.co.za